




THE SPIRIT OF SAFETY

PNOZ c1 24VDC 3n/o 1n/c

710001



PNOZcompact safety relay (standalone), inputs: 2-channel wiring with detection of shorts across contacts, manual/automatic start, outputs: 3 N/O, 1 N/C, UB 24 V DC, width: 22.5 mm, spring-loaded terminals fixed at the front of the unit, monitoring of E-STOP, safety gates.

Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Operating modes:	Automatic reset;Dual-channel;Manual reset;Detection of shorts across contacts
Supply voltage (V):	24,0
Supply voltage type:	DC
Terminal style:	fixed
Terminal type:	Spring-loaded terminal
Number of instantaneous safety contacts:	3
Number of delayed safety contacts:	0
Number of auxiliary contacts:	1
Number of semiconductor outputs:	0
Stop category:	0
Product standard:	EN 60947-5-1
Max. current at DC13 I (6 cycles/min):	5.0 A
Width dimension:	22.5 mm
Height dimension:	105.0 mm
Depth dimension:	100.0 mm
Gross weight:	170 g
Net weight:	160 g
Ambient temperature:	-10 - 55 °C



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

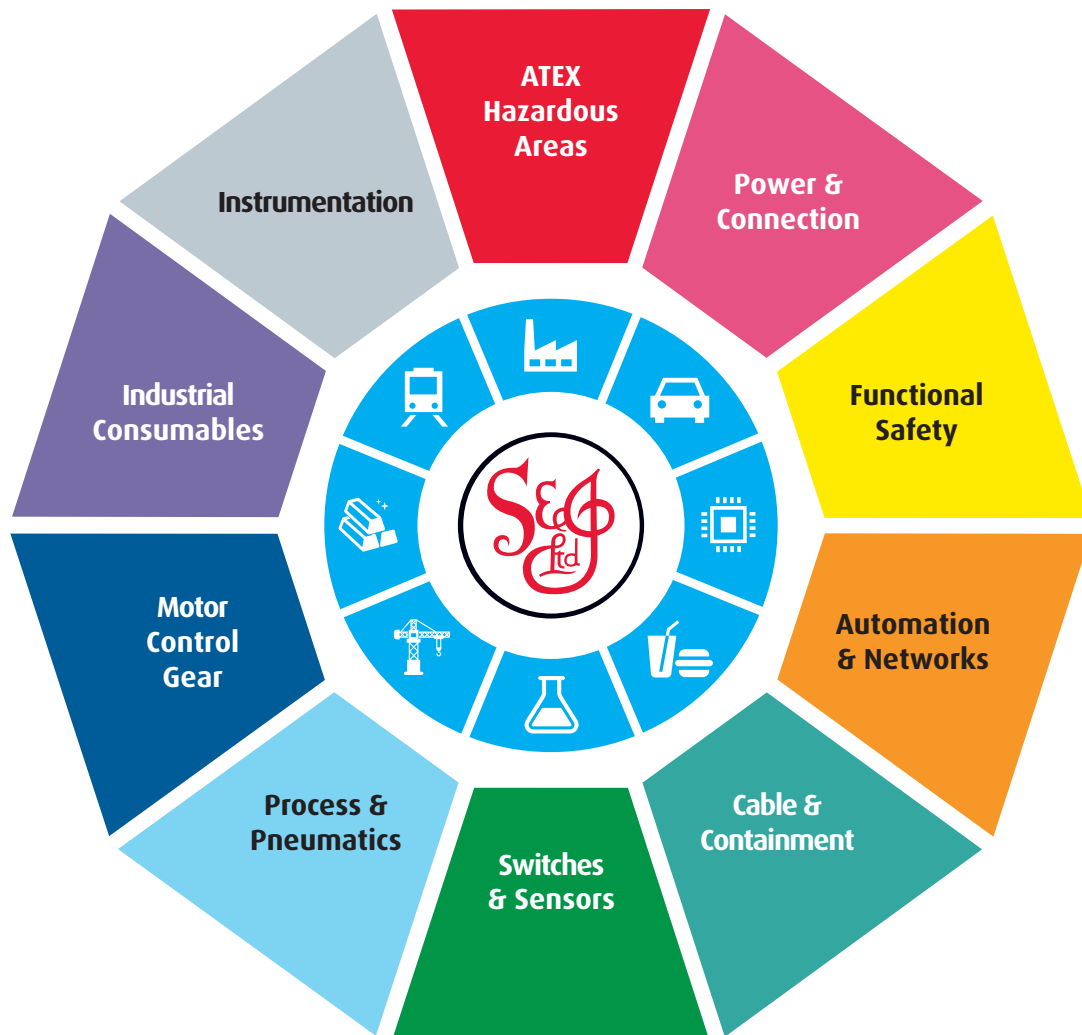

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk