


Bus coupler - AXL F BK PN TPS - 2403869

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Axioline F, Bus coupler, PROFINET, RJ45 jack, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline F connector

Product Description


The bus coupler is intended for use within a PROFINET network. The bus coupler creates the link to the Axioline F I/O system and the industrial I/O signals connected to it. Up to 63 Axioline F devices can be connected to the bus coupler. Device descriptions for Phoenix Contact controllers are integral parts of the engineering tools PC Worx and PLCnext Engineer. Corresponding GSDML files are available for integrating the Axioline F station into other programming systems. These files can be downloaded at: phoenixcontact.net/product/2403869.

Your advantages

- ✓ 2 Ethernet ports (with integrated switch)
- ✓ Conformance with PROFINET specification V2.3
- ✓ Supports PROFI-safe
- ✓ Supports PROFInergy
- ✓ Supports PROFINET S2 system redundancy (firmware version 1.30 or later)
- ✓ PROFINET RT and IRT
- ✓ Minimum cycle time of PROFINET for RT and IRT is 250 µs
- ✓ Firmware can be updated
- ✓ Runtime in bus coupler is negligible (almost 0 µs)
- ✓ Typical cycle time of the Axioline F local bus is around 10 µs
- ✓ Web-based management
- ✓ Supports the operation of Axioline Smart Elements
- ✓ Supports the AXL SE SC slot cover (firmware version 1.30 and later)
- ✓ Supports IOL-CONF (firmware version 1.30 and later)
- ✓ Supports Diag+
- ✓ Safe analog value processing with SAFE AI and other components



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 345826

Bus coupler - AXL F BK PN TPS - 2403869

GTIN	4055626345826
Weight per Piece (excluding packing)	220.800 g
Custom tariff number	85389091
Country of origin	Germany
Sales Key	DRI21A

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	45 mm
Height	126.1 mm
Depth	74 mm
Note on dimensions	The depth is valid when a TH 35-7,5 DIN rail is used (according to EN 60715).

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C (Mounting position: wall mounting on horizontal DIN rail)
	-25 °C ... 55 °C (Mounting position: any)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

Connection data

Designation	Axioline F connector
Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	1.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	16
Stripping length	8 mm

General

Color	traffic grey A RAL 7042
Net weight	220.8 g
Note on weight specifications	with connector and bus base module
Degree of pollution	2 (IEC 60664-1, EN 60664-1)

Bus coupler - AXL F BK PN TPS - 2403869

Technical data

General

Mounting type	DIN rail mounting
Mounting position	any

Interfaces

Designation	PROFINET
Number of interfaces	2
Connection method	RJ45 jack
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	100 Mbps (full duplex)
Transmission physics	Ethernet in RJ45 twisted pair
Designation	Axioline F local bus
Number of interfaces	1
Connection method	Bus base module
Transmission speed	100 Mbps
Designation	Service
Number of interfaces	1
Connection method	USB type C

Network/bus system

Amount of process data	max. 1012 Byte (Input, incl. max. 2 byte IOPS per local bus device)
	max. 1012 Byte (Output, incl. max. 2 byte IOPS per local bus device)
	max. 506 Byte (Input, incl. max. 2 byte IOPS per local bus device, with the use of the Phoenix Redundancy Layer (PRL))
	max. 506 Byte (Output, incl. max. 2 byte IOPS per local bus device, with the use of the Phoenix Redundancy Layer (PRL))
Number of supported devices	max. 63 (per station)
Number of local bus devices that can be connected	max. 63
Protocol	PROFINET
	TFTP
	PTCP
	LLDP
	SNMP
	MRP
	DCP
	DDI
	BootP (BootP only to perform firmware updates)

Axioline potentials

Designation	Communications power U_L feed-in (the supply of the Axioline F local bus U_{Bus} is generated from U_L)
Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current consumption	max. 600 mA (with 2 A at U_{Bus} for the I/Os and $U_L = 24$ V)

Bus coupler - AXL F BK PN TPS - 2403869

Technical data

Axioline potentials

Power consumption	max. 14.4 W (2.0 A on U_{BUS} , $U_L = 24$ V)
Type of protection	Surge protection
	Reverse polarity protection
Designation	Axioline F local bus supply (U_{BUS})
Supply voltage	5 V DC (via bus base module)
Power supply unit	max. 2 A

Electrical isolation

Test section	PROFINET interface 1 / PROFINET interface 2 1500 V AC 50 Hz 1 min.
	PROFINET interface 1 / 24 V communications voltage (U_L) feed-in 1500 V AC 50 Hz 1 min.
	PROFINET interface 2 / 24 V communications voltage (U_L) feed-in 1500 V AC 50 Hz 1 min.
	PROFINET interface 1 / functional ground 1500 V AC 50 Hz 1 min.
	PROFINET interface 2 / functional ground 1500 V AC 50 Hz 1 min.
	24 V communications voltage (U_L) feed-in / functional ground 500 V AC 50 Hz 1 min.

Standards and Regulations

Immunity to ESD	Noise immunity test in accordance with EN 61000-6-2 Electrostatic discharge (ESD) EN 61000-4-2/IEC 61000-4-2 Criterion B, 6 kV contact discharge, 8 kV air discharge
Immunity to EF	Noise immunity test in accordance with EN 61000-6-2 Electromagnetic fields EN 61000-4-3/IEC 61000-4-3 Criterion A, Field intensity: 10 V/m
Immunity to burst	Noise immunity test in accordance with EN 61000-6-2 Fast transients (burst) EN 61000-4-4/IEC 61000-4-4 Criterion B, 2 kV
Immunity to surge	Noise immunity test in accordance with EN 61000-6-2 Transient overvoltage (surge) EN 61000-4-5/IEC 61000-4-5 Criterion B, DC supply lines: ± 0.5 kV/ ± 0.5 kV (symmetrical/asymmetrical), fieldbus cable shield: ± 1 kV
Immunity to conducted interference	Noise immunity test in accordance with EN 61000-6-2 Conducted interference EN 61000-4-6/IEC 61000-4-6 Criterion A, Test voltage 10 V
Interference emission	Noise emission test according to EN 61000-6-3 Class B
Mechanical tests	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 5g
	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 30g
	Continuous shock according to EN 60068-2-27/IEC 60068-2-27 10g
Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
Overvoltage category	II (IEC 60664-1, EN 60664-1)


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Bus coupler - AXL F BK PN TPS - 2403869

Block diagram

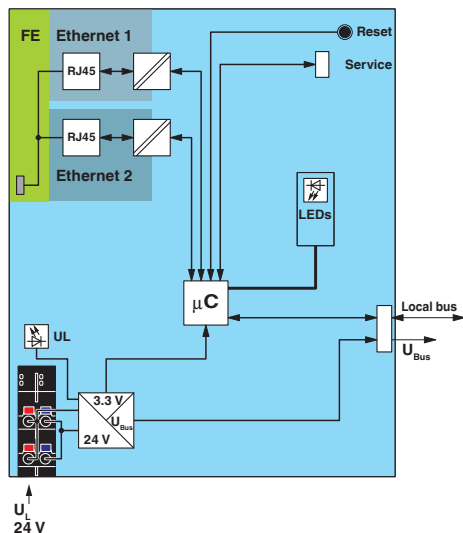


Connection diagram



Connection of the cables

Internal wiring of the terminal points

Dimensional drawing

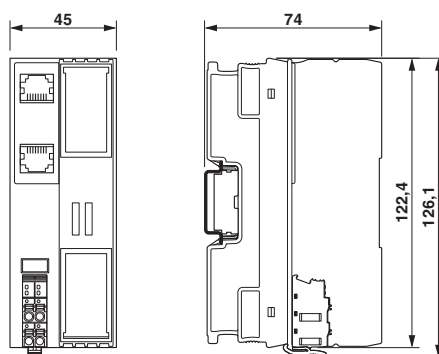

Classifications

eCl@ss

eCl@ss 10.0.1	27242608
eCl@ss 11.0	27242608
eCl@ss 4.0	27240490
eCl@ss 4.1	27240490
eCl@ss 5.0	27242208
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242608
eCl@ss 9.0	27242608

Bus coupler - AXL F BK PN TPS - 2403869

Classifications

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 6.0	EC001604
ETIM 7.0	EC001604

UNSPSC

UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602

Approvals





Approvals

Approvals

PROFINET / UL Listed / cUL Listed / DNV GL / PRS / LR / KR / NK / ABS / BV / BSH / RINA / cULus Listed







Ex Approvals

Approval details

PROFINET			Z12930
UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
DNV GL		https://approvalfinder.dnvgl.com/	TAA00000DF
PRS		http://www.prs.pl/	TE/1117/880590/20

Bus coupler - AXL F BK PN TPS - 2403869

Approvals

LR		http://www.lr.org/en	LR2001902TA
KR		http://www.krs.co.kr/eng/main/main.aspx	HMB17372-AC002
NK		http://www.classnk.or.jp/hp/en/	14A006
ABS		http://www.eagle.org/eagleExternalPortalWEB/	20-2059154-PDA
BV		http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials	36433/B2 BV
BSH			840
RINA		http://www.rina.org/en	ELE233820XG
cULus Listed			



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk