DOWNLOADED FROM SCATTS.CO.UK

| 52104310 | **DATA SHEET** | LAPP |
|---|---|---|
| Valid from: 13.06.2019 | **SKINDICHT® MR-M** | |

The SKINDICHT® MR-M reducers enable the use of cable glands which outer thread is smaller than the already existing thread borings in machines, devices and housings.

## Technical features:

| | |
|---|---|
| Material | Brass, nickel-plated (external thread M16x1.5 up to M72x2) |
| | Brass, bright (internal thread M80x2) |
| O-ring (optional) | NBR |
| External thread | M16x1.5 up to M80x2 acc. to EN 60423 |
| Internal thread | M12x1.5 up to M75x1,5 acc. to EN 60423 |
| Temperature range | -60°C up to +200°C |

## Norm references:

CE

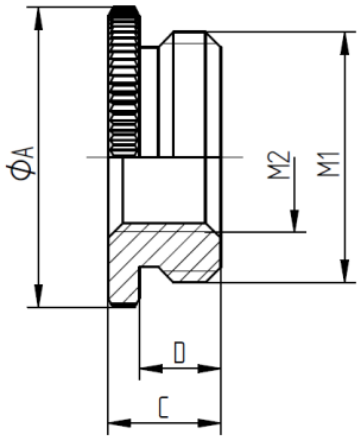




We reserve all rights according to DIN ISO 16016.


DOWNLOADED FROM SCATTS.CO.UK

DOWNLOADED FROM SCATTS.CO.UK



## SKINDICHT® MR-M

| External thread M1 | Internal thread M2 | Diameter Ø A mm | High C mm | High D mm | Article No. |
|---|---|---|---|---|---|
| M16x1,5 | M12x1,5 | 20 | 8,5 | 6 | 52104310 |
| M20x1,5 | M12x1,5 | 24 | 9 | 6,5 | 52104311 |
| M20x1,5 | M16x1,5 | 24 | 9 | 6,5 | 52104312 |
| M25x1,5 | M16x1,5 | 30 | 10 | 7 | 52104313 |
| M25x1,5 | M20x1,5 | 30 | 10 | 7 | 52104314 |
| M32x1,5 | M20x1,5 | 37 | 11,5 | 8 | 52104315 |
| M32x1,5 | M25x1,5 | 37 | 11,5 | 8 | 52104316 |
| M40x1,5 | M25x1,5 | 46 | 12,5 | 9 | 52104317 |
| M40x1,5 | M32x1,5 | 46 | 12,5 | 9 | 52104318 |
| M50x1,5 | M32x1,5 | 56 | 14 | 10 | 52104319 |
| M50x1,5 | M40x1,5 | 56 | 14 | 10 | 52104320 |
| M63x1,5 | M40x1,5 | 68 | 14 | 10 | 52104321 |
| M63x1,5 | M50x1,5 | 68 | 14 | 10 | 52104322 |
| M72x2 | M63x1,5 | 78 | 19 | 12 | 52006575 |
| M80x2 | M75x1,5 | 86 | 19 | 12 | 52006579 |

## SKINDICHT® MR-M with o-ring

| External thread M1 | Internal thread M2 | Diameter Ø A mm | High C mm | High D mm | Article No. |
|---|---|---|---|---|---|
| M16x1,5 | M12x1,5 | 20 | 8,5 | 6 | 52104409 |
| M20x1,5 | M12x1,5 | 24 | 9 | 6,5 | 52104411 |
| M20x1,5 | M16x1,5 | 24 | 9 | 6,5 | 52104412 |
| M25x1,5 | M16x1,5 | 30 | 10 | 7 | 52104413 |
| M25x1,5 | M20x1,5 | 30 | 10 | 7 | 52104414 |
| M32x1,5 | M20x1,5 | 37 | 11,5 | 8 | 52104419 |
| M32x1,5 | M25x1,5 | 37 | 11,5 | 8 | 52104416 |
| M40x1,5 | M25x1,5 | 46 | 12,5 | 9 | 52104417 |
| M40x1,5 | M32x1,5 | 46 | 12,5 | 9 | 52104418 |
| M50x1,5 | M32x1,5 | 56 | 14 | 10 | 52104421 |
| M50x1,5 | M40x1,5 | 56 | 14 | 10 | 52104422 |
| M63x1,5 | M40x1,5 | 68 | 14 | 10 | 52104423 |
| M63x1,5 | M50x1,5 | 68 | 14 | 10 | 52104424 |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.



We reserve all rights according to DIN ISO 16016.
PD 0019/05_04.18EN

DOWNLOADED FROM SCATTS.CO.UK

SCATTERGOOD & JOHNSON LTD
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS
Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product suppliers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

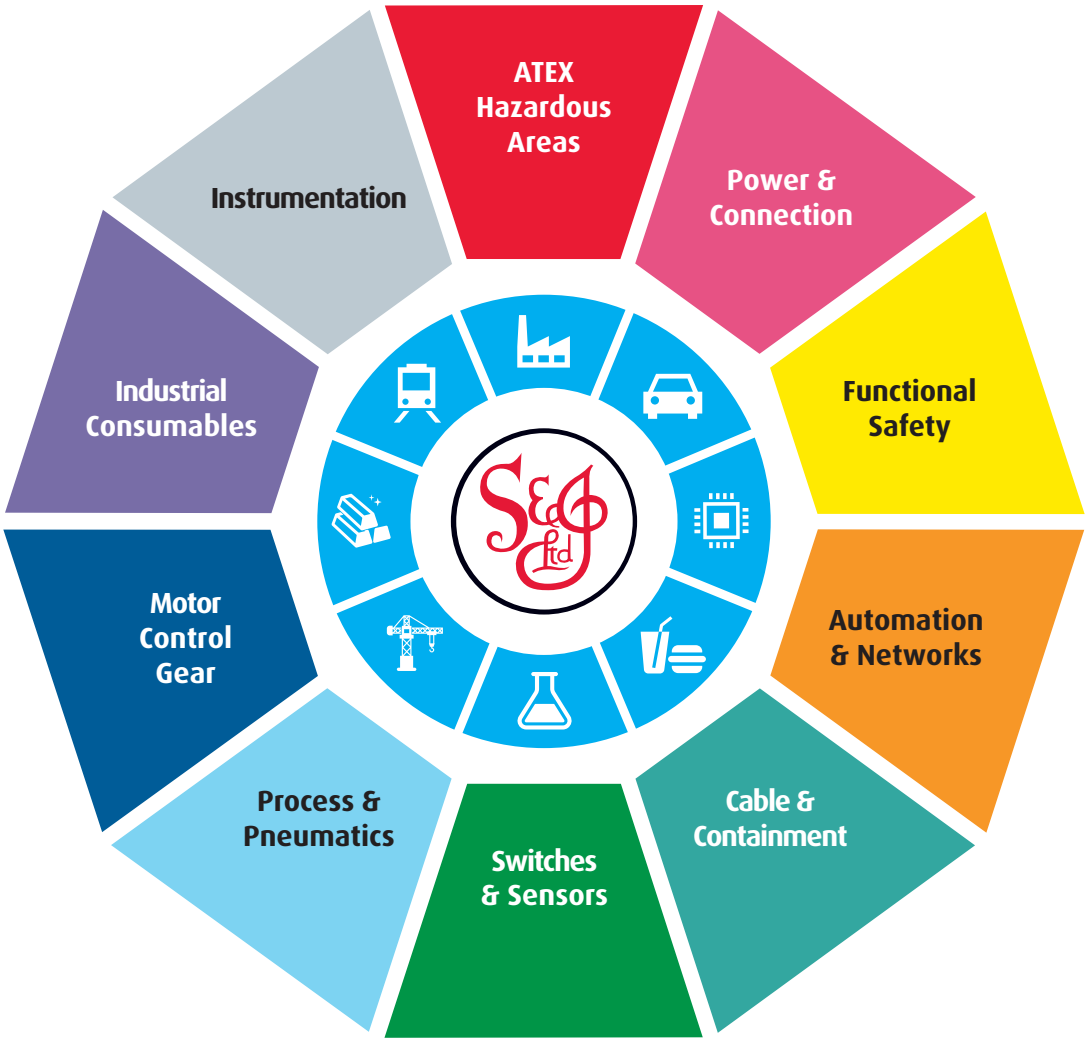


Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**www.scatts.co.uk**