

## DATASHEET - FAZ-C6/2-DC



## Miniature circuit breaker (MCB), 6 A, 2p, characteristic: C, DC

**Part no.** FAZ-C6/2-DC  
**Catalog No.** 279137  
**Alternate Catalog No.** FAZ-C6/2-DC  
**EL-Nummer (Norway)** 1691503



Similar to illustration

## Delivery program

|   |          |    |                                |
|---|----------|----|--------------------------------|
| Basic function                                  |          |    | Miniature circuit-breakers     |
| Number of poles                                 |          |    | 2 pole                         |
| Tripping characteristic                         |          |    | C                              |
| Application                                     |          |    | Switchgear for DC applications |
| Rated current                                   | $I_n$    | A  | 6                              |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$ | kA | 10                             |
| Product range                                   |          |    | FAZ-DC                         |

## Technical data

## Electrical

|   |            |         |                       |
|---|------------|---------|-----------------------|
| Standards                                       |            |         | EN 45545-2; IEC 61373 |
| Rated operational voltage                       | $U_e$      | V       | 250 (per pole)        |
|   |            | V DC    |                       |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$   | kA      | 10                    |
| Characteristic                                  |            |         | C                     |
| Max. back-up fuse                               |            | A gL/gG | 100                   |
| Selectivity Class                               |            |         | 3                     |
| lifespan  |            |         |                       |
| Lifespan  | Operations |         | > 10000               |
| Direction of incoming supply                    |            |         | Polarity dependent    |

## Mechanical

|                              |  |                 |   |
|------------------------------|--|-----------------|---|
| Standard front dimension     |  | mm              | 45                                      |
| Enclosure height             |  | mm              | 80                                      |
| Mounting width per pole      |  | mm              | 17.5                                    |
| Mounting                     |  |                 | IEC/EN 60715 top-hat rail               |
| Degree of Protection         |  |                 | IP20, IP40 (when fitted)                |
| Terminals top and bottom     |  |                 | Twin-purpose terminals                  |
| Terminal protection          |  |                 | Finger and back-of-hand proof to BGV A2 |
| Terminal capacities          |  | mm <sup>2</sup> |   |
|                              |  | mm <sup>2</sup> | 1 x 25                                  |
|                              |  | mm <sup>2</sup> | 2 x 10                                  |
| Thickness of busbar material |  | mm              | 0.8 ... 2                               |
| Mounting position            |  |                 | As required                             |

## Design verification as per IEC/EN 61439

|  |            |    |     |
|--|------------|----|-----|
| Technical data for design verification                   |            |    |     |
| Rated operational current for specified heat dissipation | $I_n$      | A  | 6   |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W  | 0   |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W  | 2.9 |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W  | 0   |
| Heat dissipation capacity                                | $P_{diss}$ | W  | 0   |
| Operating ambient temperature min.                       |            | °C | -40 |

|                                    |    |   |
|------------------------------------|----|---|
| Operating ambient temperature max. | °C | 75  |
|                                    |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |


## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)

Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ec@ss10.0.1-27-14-19-01 [AAB905014])

|  |                 |          |
|--|-----------------|----------|
| Release characteristic   |                 | C        |
| Number of poles (total)  |                 | 2        |
| Number of protected poles                                      |                 | 2        |
| Rated current  | A               | 6        |
| Rated voltage  | V               | 250      |
| Rated insulation voltage Ui                                    | V               | 440      |
| Rated impulse withstand voltage Uimp                           | kV              | 4        |
| Rated short-circuit breaking capacity Icn EN 60898 at 230 V    | kA              | 0        |
| Rated short-circuit breaking capacity Icn EN 60898 at 400 V    | kA              | 0        |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V | kA              | 10       |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V | kA              | 10       |
| Voltage type   |                 | DC       |
| Frequency  | Hz              | 50 - 60  |
| Current limiting class   |                 | 3        |
| Suitable for flush-mounted installation                        |                 | No       |
| Concurrently switching N-neutral                               |                 | No       |
| Over voltage category  |                 | 3        |
| Pollution degree   |                 | 2        |
| Additional equipment possible                                  |                 | Yes      |
| Width in number of modular spacings                            |                 | 2        |
| Built-in depth   | mm              | 70.5     |
| Degree of protection (IP)                                      |                 | IP20     |
| Ambient temperature during operating                           | °C              | -25 - 75 |
| Connectable conductor cross section multi-wired                | mm <sup>2</sup> | 1 - 25   |
| Connectable conductor cross section solid-core                 | mm <sup>2</sup> | 1 - 25   |

**Dimensions**

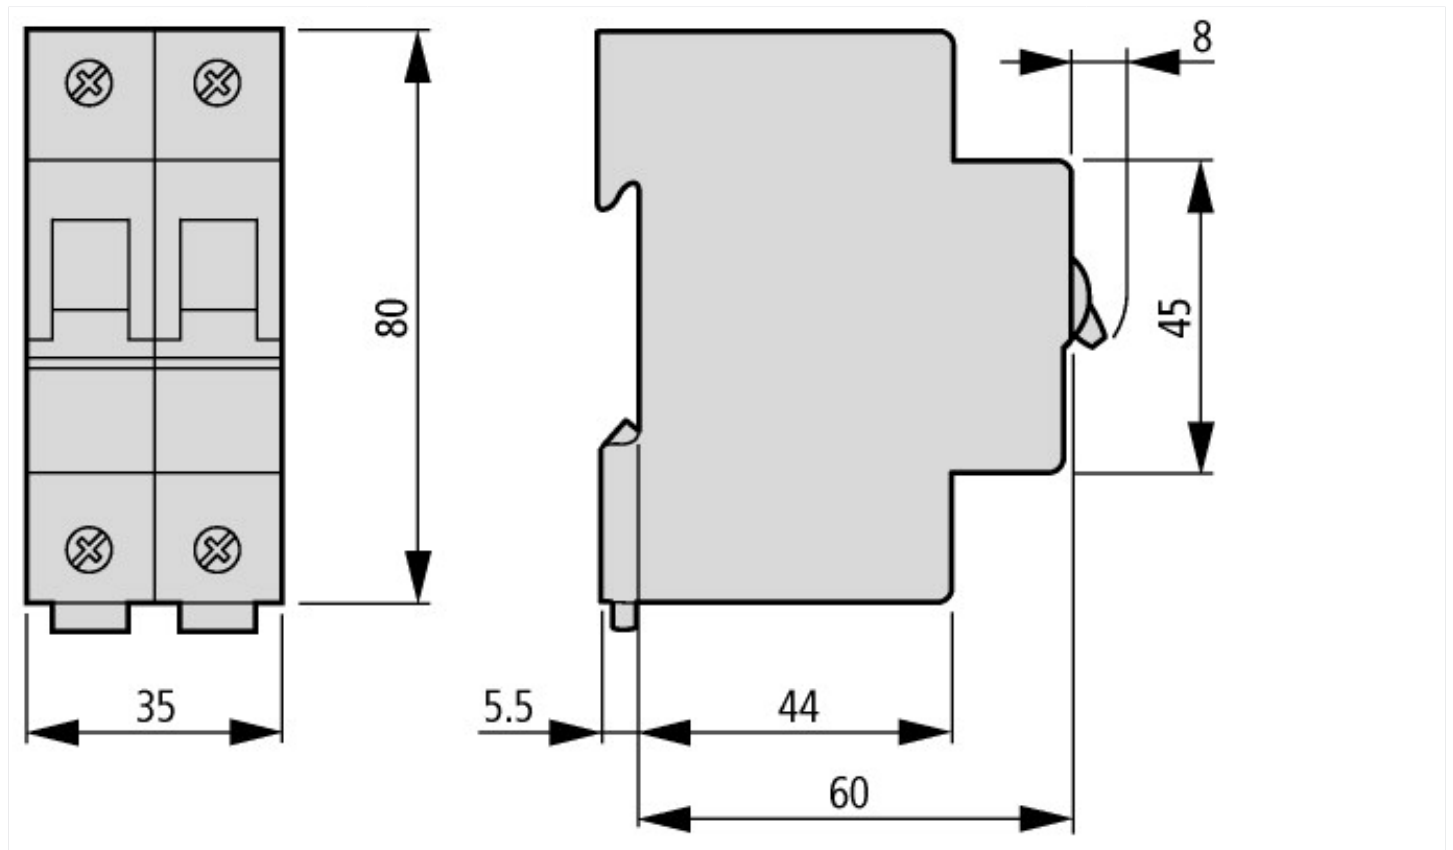

**Additional product information (links)**

Temperature dependency, derating

<https://www.eaton.com/content/dam/eaton/technicaldocumentation/technical-data-tables/Derating table FAZ.pdf>



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)