




Auxiliary contact, for PKDM, PFIM, PFR, PFHM, dRCM, 2W, 0.5HP

Part no. Z-NHK
Catalog No. 248434

EL-Nummer (Norway) 1609491

Delivery program

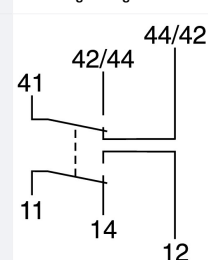Basic function		Accessories for miniature circuit-breaker Accessories for combined residual-current/power circuit-breakers Accessories for residual current circuit-breakers
Basic function accessories		Tripping signal contacts
Application		Switchgear for industrial and advanced commercial applications
Product range		Accessory
Side mounting		for fitting on left to: LS, FI/LS for fitting on right to: FI
Contact sequence		

Technical data

Electrical

Contact function			2 C/O
Rated operational voltage	U_e	V AC	230
Rated frequency	f	Hz	50/60
Rated current	I_e	A	2
Conventional free air thermal current	I_{th}	A	2
Rated operational current			
AC-15	I_e	A	2 (250 V AC)
AC-12	I_e	A	3 (250 V AC)
DC-13	I_e	A	0.5 (110 V DC)
Rated insulation voltage	U_i	V AC	250
Minimum operating voltage per contact	U_{min}	V DC	5
Rated impulse withstand voltage	U_{imp}	kV	2.5
Rated conditional short-circuit current With 6 A back-up fuse	I_{sc}	kA	1
Max. admissible back-up fuse		A gL	
Max. admissible back-up fuse		A gL	6

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width		mm	8.8 (0.5 SU)
Mounting			Can be fitted to left of FAZ-...-NA, FAZ-...-RT, FAZ-XAA-NA...
Degree of protection			
Integrated			IP40
Terminal protection			Busbar tag shroud to BGV A3
Terminals			Lift terminals

Design verification as per IEC/EN 61439

Technical data for design verification		
Operating ambient temperature min.	°C	-5
Operating ambient temperature max.	°C	40

Technical data ETIM 7.0


Devices for distribution board-/surface mounting (EG000062) / Auxiliary device for distribution board devices (EC001286)		
Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ec1@ss10.0.1-27-14-35-02 [AKE327013])		
Device fitting		Universal
Additional equipment		Signalling switch
Attached at delivery		No
Assembly width (TE)		0.5
Number of contacts as normally open contact		0
Number of contacts as normally closed contact		0
Number of contacts as change-over contact		2
Number of fault-signal switches		0
Rated switch current	A	4
Rated voltage	V	250
Voltage type for actuating		AC
With auto test for earth leakage function		No
Suitable for max. number of poles main contact unit (total)		2
Suitable for max. current main contact unit	A	4

Approvals

Product Standards		IEC/EN 60898; UL 489; CSA-C22.2 No. 5-09; CE marking
UL File No.		E257181
UL Category Control No.		DIHS, DIHS7
CSA File No.		204453
CSA Class No.		1437-01
North America Certification		UL listed, CSA certified
Degree of Protection		IEC: IP20, UL/CSA Type: -

Dimensions

Z7-NHK

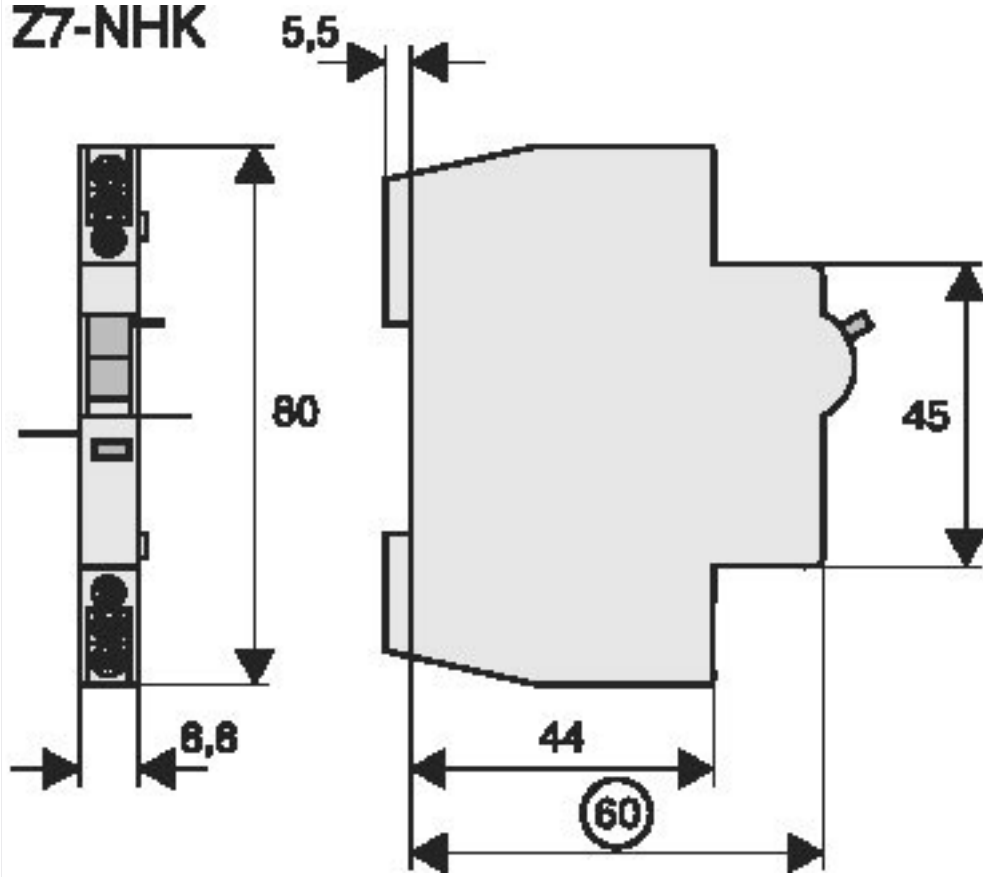



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk