



Safety light curtain

SLCS14




- Resolution 14 mm (finger protection)
- Protection field height up to 1200 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- SIL3 (IEC 61508)
- Degree of protection IP67
- Temperature range -35 ... 60°C (-31 ... 140 °F)
- Slim design, mounting on three sides

Safety light curtain



Dimensions

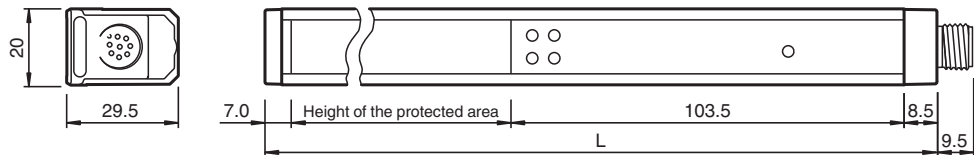

Technical Data

General specifications

Effective detection range	0.4 ... 8 m
Light source	IRED
Light type	modulated infrared light , 850 nm
Protection field height	see Table 1, max. 1200 mm

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 270804_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Operating mode	Startup/restart disable, deactivateable	
Optical resolution		14 mm
Angle of divergence		< 5 °
Ambient light limit		Not sensitive to ambient light in accordance with IEC 61496-2
UL File Number		E215245
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 3
Performance level (PL)		PL e
Category		Cat. 4
Mission Time (T _M)		20 a
PFH _d		Depending on the protection field height; see Manual
Type		4
Indicators/operating means		
Operation indicator		green: Power on
Function indicator		Green: OSSD ON , Red: OSSD OFF
Status indicator		Transmitter unit: LED yellow: Mode, test or error Receiver: LED yellow: Start readiness, function reserve or error
Electrical specifications		
Operating voltage	U _B	24 V DC (-20%, +30%) ; Power supply with safe isolation: 24 V DC
No-load supply current	I ₀	Transmitter unit: ≤ 150 mA Receiver: ≤ 150 mA (without outputs)
Protection class		III , IEC 61140
Power consumption	P ₀	Transmitter unit: 5 W Receiver: 15 W
Input 1		
Input type		Transmitter unit test
Input format		Break contact
Switching voltage		24 V DC
Input current		5 mA
Input 2		
Input type		Transmitter unit, mode A/B
Function		Beam Code A: open or 0 V Beam Code B: 24 V DC, 5 mA
Input 3		
Input type		Receiver unit relay monitor
Input format		Break contact
Switching voltage		24 V DC
Input current		5 mA
Input 4		
Input type		Receiver unit, start release
Input format		Break contact
Input current		5 mA
Input 5		
Input type		Receiver unit, mode A/B (see transmitter unit, mode A/B)
Output		
Response time		see Table 1, max. 54 ms
Output 1		
Output type		Receiver unit OSSD
Signal output		PNP semiconductor , monitored for short and cross circuits
Switching voltage		ON: U _B - 2 V; OFF: < 1 V
Switching current		ON: max. 0.1 A; OFF: < 5 μA
Output 2		
Output type		Receiver signal output start readiness
Signal output		PNP-semiconductor, short-circuit protected, 0.1A

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 270804_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Technical Data

Conformity

Functional safety	ISO 13849-1 ; EN 61508 part1-4
Product standard	EN 61496-1 ; IEC 61496-2

Approvals and certificates

CE conformity	CE
UL approval	cULus Listed
CCC approval	CCC approval / marking not required for products rated ≤36 V
TÜV approval	TÜV

Ambient conditions

Ambient temperature	-35 ... 60 °C (-31 ... 140 °F)
Storage temperature	-35 ... 70 °C (-31 ... 158 °F)
Relative humidity	max. 95 %, not condensing

Mechanical specifications


Housing length L	see table 2
Degree of protection	IP67 , For indoor use only
Connection	Transmitter unit: 4-pin, M12 x 1 connector Receiver: 8-pin, M12 x 1 connector Cable cross section min. 0.25 mm ² Max. cable length 50 m
Material	
Housing	extruded aluminum section , gold anodized
Optical face	Plastic pane , Transparent polycarbonate
Mass	see table 2

General information

Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
---------------------------	--


Connection

Transmitter unit:




Pin	Transmitter unit
1	24 V DC
2	Mode A/B
3	0 V DC
4	Test

Receiver unit:




Pin	Receiver unit
1	Restart Interlock (RI)
2	24 V DC
3	Relay Monitor (RM)
4	Status / Select RI-RM
5	OSSD1
6	OSSD2
7	0 V DC
8	Mode A/B

Assembly

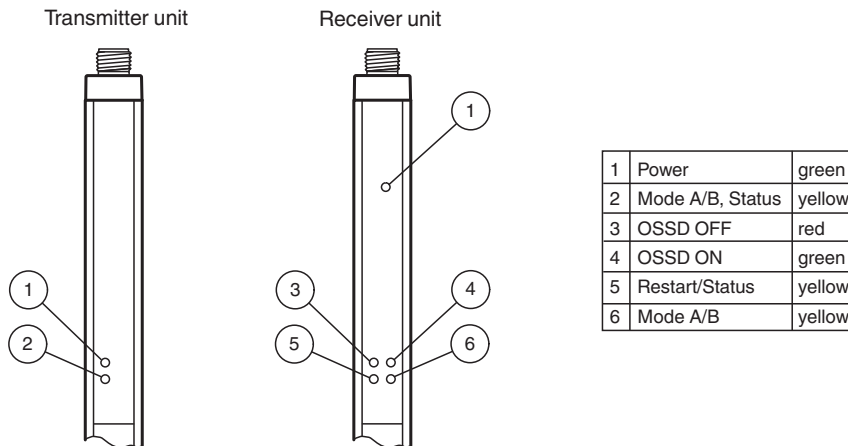

Application

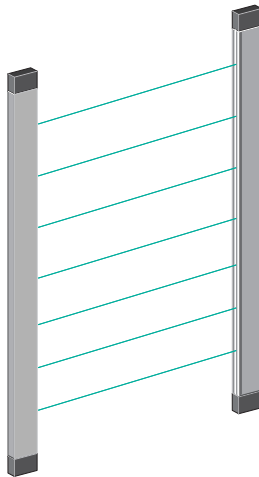

Matching system components

	SB4-OR-4XP-B-4159	Safety control unit
	SB4-OR-4XP	Safety control unit
	SB4-OR-4XP-B	SB4 series safety control unit with 1 optional module slot for functional enhancement
	SB4-OR-4XP-B-B	SB4 series safety control unit with optional module slots for functional enhancement
	SB4-OR-4XP-B-B-B	SB4 series safety control unit with optional module slots for functional enhancement
	SB4-OR-4XP-B-B-B-B	SB4 series safety control unit with optional module slots for functional enhancement
	SB4-OR-4XP-B-B-B-B-B	SB4 series safety control unit with optional module slots for functional enhancement
	SB4-OR-4XP-B-4158	Safety control unit

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 270804_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
 www.pepperl-fuchs.com

 USA: +1 330 486 0001
 fa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 1111
 fa-info@de.pepperl-fuchs.com

 Singapore: +65 6779 9091
 fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Matching system components

	SB4-OR-4XP-3819	Safety control unit
	SB4-OR-4XP-4M	Safety control unit
	SB4-OR-4XP-4MD	Safety control unit
	SB4-OR-4XP-4M-4136	Safety control unit of series SB4
	SB4-OR-4XP-4X	Safety control unit
	SB4-OR-4XP-4X-3819	Safety control unit
	SB4-OR-4XP-4136	Safety control unit of series SB4

Accessories

	OMH-SLCT-01	Quick clamp and adjustment system
	OMH-SLCT-02	Attachment aid for OMH-SLCT-01
	OMH-SLCT-03	Mounting bracket including adjustment
	OMH-SLCT-04	Mounting bracket including adjustment (with loose bearing)
	OMH-SLCT-05	Mounting bracket including adjustment
	OMH-SLCT-06	Swivel Bracket
	TR 14/30/50/60	Test rod for safety light curtain SLCT
	AA SLCT-01	Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains
	OMH-SLCT-100-1200	Mounting base for floor mounting and cover plate
	OMH-SLCT-100-2100	Mounting base for floor mounting and cover plate
	OMH-SLCT-100-2500	Mounting base for floor mounting and cover plate
	OMH-SLCT-110-1200	Mounting base for floor mounting with rear panel and cover plate

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 270804_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Accessories

	OMH-SLCT-110-1500	Mounting base for floor mounting with rear panel and cover plate
	OMH-SLCT-110-2100	Mounting base for floor mounting with rear panel and cover plate
	OMH-SLCT-120-1200	Side protection for mounting base
	OMH-SLCT-120-1500	Side protection for mounting base
	OMH-SLCT-120-2100	Side protection for mounting base
	OMH-SLCT-120-2500	Side protection for mounting base
	OMH-SLCT-200	Floor mount
	SLCT-M-01-1200	Inclined mirror for stable 90° deflection with cover plate
	SLCT-M-01-1500	Inclined mirror for stable 90° deflection with cover plate
	SLCT-M-01-2100	Inclined mirror for stable 90° deflection with cover plate
	OMH-SLCT-10	Clamp mounting suitable for 6 mm ... 11.5 mm groove
	OMH-SLCT-11	Reverse clamp mounting suitable for 8.5 mm ... 10.5 mm groove
	OMH-SLCT-12-500	Mounting bracket, muting arm with round rod d=12 mm

Technical Features

Table 1 - Response time:

Height of the protected area [mm]	Response time [ms]
100	11
200	15
300	19
400	23
500	26
600	30
700	34
800	38
900	42
1000	46
1100	50
1200	54

Table 2 - Total length and weight:

Height of the protected area [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
100	219	140
200	319	200
300	419	250
400	519	310
500	619	370
600	719	430
700	819	480
800	919	540
900	1019	600
1000	1119	650
1100	1219	710
1200	1319	760

Accessories

Other suitable accessories can be found at www.pepperl-fuchs.com

Function

The Safety light curtain consists of a transmitter and a receiver unit. The protected area is formed by infrared light beams transmitted from the transmitter unit to the receiver unit. The spacing between the individual light beams determines the minimum obstruction size (14 mm) that can be reliably detected within the entire protected area range.

Type Code

Release date: 2020-10-06 Date of issue: 2020-10-06 Filename: 270804_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

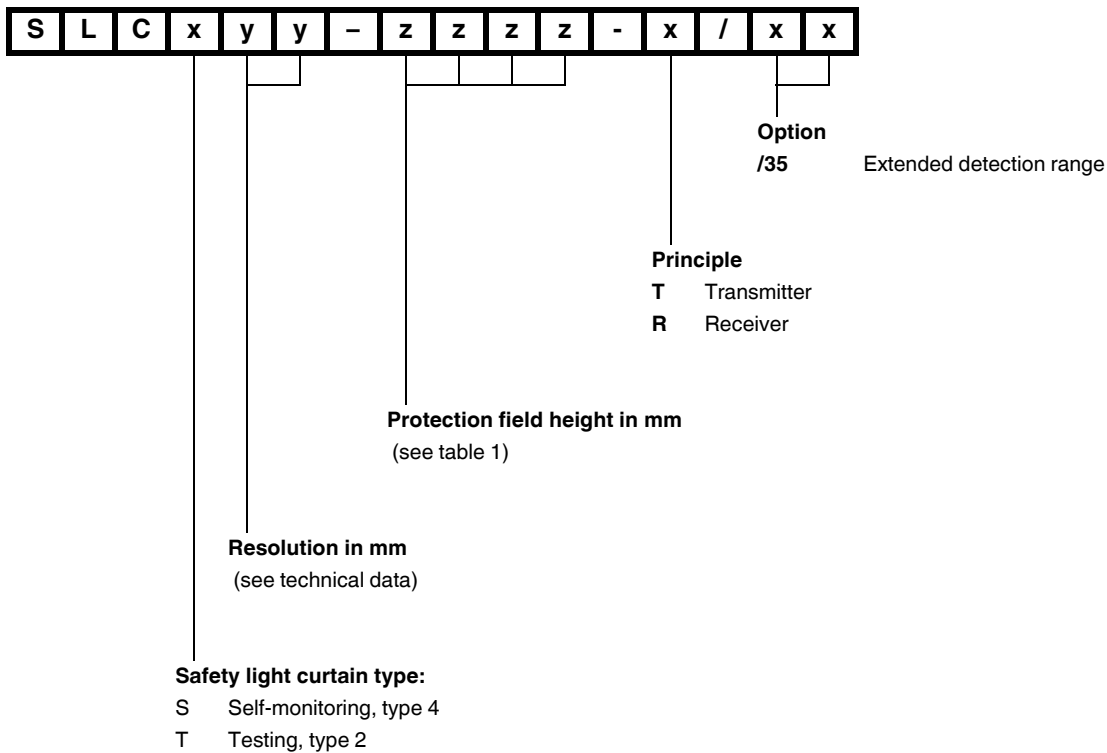

Application

- Active opto-electronic protective device (AOPD) for protection of people in danger zones and high risk areas
- Hand protection from 30 mm resolution
- Finger protection from 14 mm resolution



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

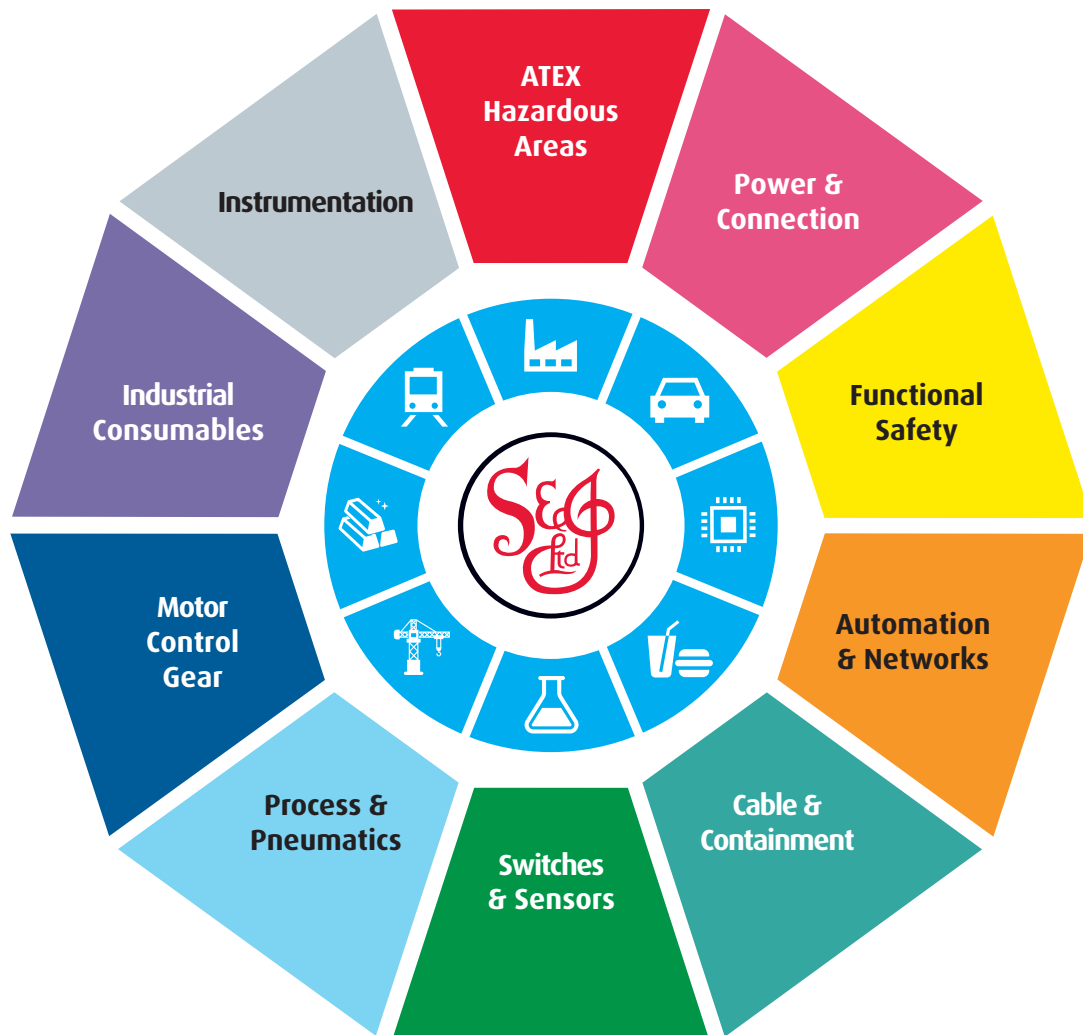

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk