

ARCA 507030 No MP



Sample image

Order symbol: ARCA 507030 No MP

Product nbr: 8120031N

Description: Cabinet. PC


Remarks: Grey cover. 2-point locking. hinges on the short side

EAN: 6418074089458

El. number:

- Finland:
- Denmark:
- Sweden:

Including: Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

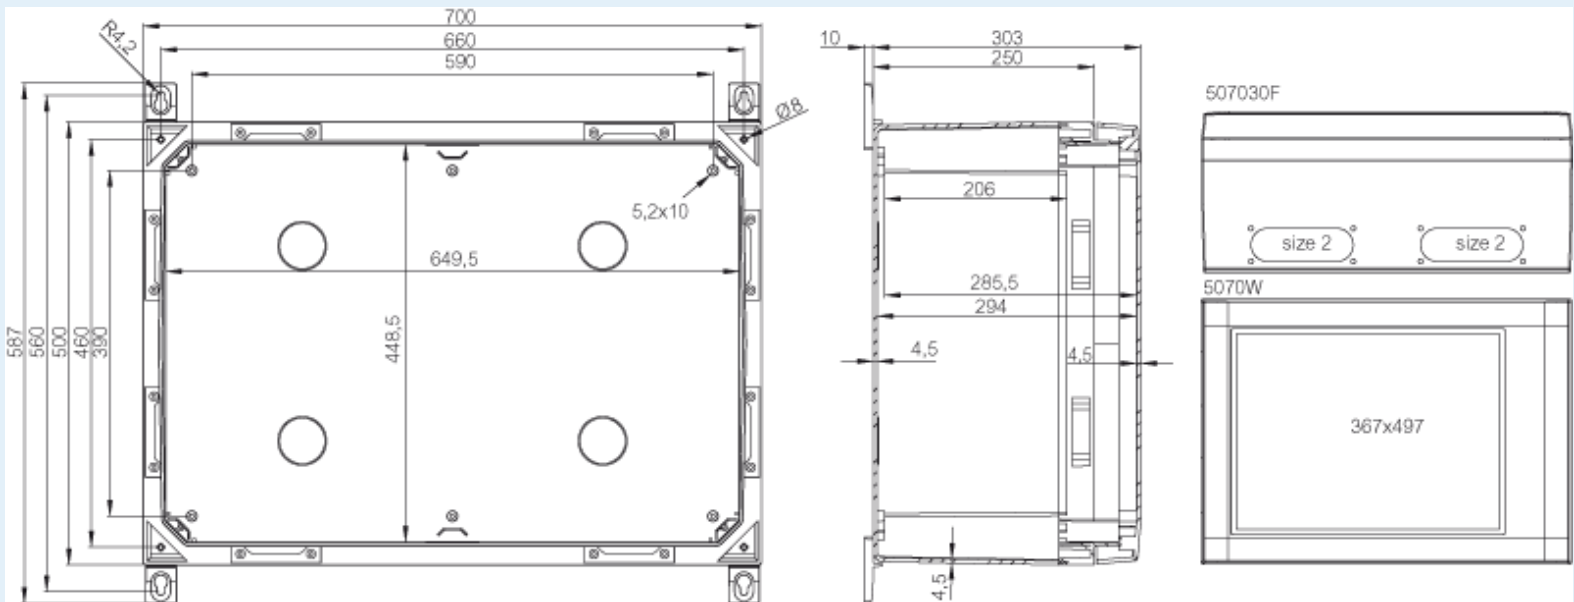

| Dimensions: | Height | Width | Depth |
|-------------|--------|-------|-------|
| mm: | 500 | 700 | 300 |
| inch: | 19.69 | 27.56 | 12.2 |

Materials:

Material: Polycarbonate

Accessories:

| | |
|---------------|---|
| SBK ARCA 50 | Support bar kit (435 x 40 x 30) |
| MPX ARCA 7050 | Mounting plate (630x430 mm) (630 x 430 x 5) |
| PMK ARCA 70 | PoleMounting kit. for pole ø100-300mm (685 x 485 x 35) |
| RCS ARCA 5070 | Rain canopy set for size 5070 (20 x 700 x 30) |

| | |
|------------------|----------------------|
| Base colour: | RAL 7035 -light grey |
| Cover colour: | RAL 7035 -light grey |
| Gasket material: | Polyurethane |

| | |
|-----------------|---|
| DSP ARCA RM | Door stopper ARCA. right. midsize 5070-8060 |
| DRS ARCA 507030 | DIN rail frame set (685 x 485 x 35) |
| IDS ARCA 5070 | Inner door set (485 x 385 x 35) |
| SBK ARCA 70 | Support bar kit (615 x 50 x 30) |
| DSP ARCA LM | Door stopper ARCA. left. midsize 5070-8060 |
| MPS ARCA 7050 | Mounting plate (630x430x2 mm) (630 x 430 x 2) |
| MPMP ARCA 7050 | Mounting plate multiperforated (630x430x2 mm - ø3.6 mm) (630 x 430 x 2) |
| MPP ARCA 5070 | Mounting plate perforated (630x430x2 mm - 26x11 mm) (430 x 630 x 2) |

Temperatures:

| | |
|-------------------------------|-------------|
| Temperature °C (short term):: | -40 ... 120 |
| Temperature °C (continuous): | -40 ... 80 |
| Temperature °F (short term): | -40 ... 250 |
| Temperature °F (continuous): | -40 ... 175 |

Rating:

| | |
|--|--------------------------|
| Ingress protection (EN 60529): | IP66; |
| Impact Resistance (EN 62262): | IK10; |
| Electrical insulation: | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1 |
| UV resistance: | UL 508 |
| Flammability Rating: | UL 94 5VA |
| Glow Wire Test (IEC 695-2-1) °C: | 960 °C |
| NEMA Class | NEMA 1, 4, 4X, 12 and 13 |

Certificates:

Certificate FI 40467



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk