

KML

CONTACTOR PARA CONDENSADORES CONTACTOR FOR CAPACITORS




Descripción / Description

Los nuevos contactores KML están diseñados conforme a la norma IEC 60947-1 y son adecuados para la maniobra de conexión de condensadores trifásicos de potencia. Gracias a su bloque de precarga montado en el mismo contactor, se reducen las fuertes puntas de corriente producidas en el momento de conexión de los condensadores y se protege a la vez el propio contactor.

El bloque de precarga consiste en tres contactos auxiliares de precierre y resistencias de amortiguamiento (2 por fase) a través de las cuales los capacitores son preconnectados a la red. Una vez las resistencias han amortiguado los picos de corriente se produce la abertura automática de los contactos auxiliares con el objetivo de no tener pérdidas innecesarias.

The new KML contactors are designed in compliance with IEC 60947-1 standard and are suitable for operating three-phase power capacitors. Thanks to the block of preload build-in the same contactor, high currents peaks are reduced when connecting the capacitors and protecting as well the contactor.

The block of preload consists of three auxiliary contacts of preclosing, along with resistance (two by phase) through which the capacitors are preconnected to the network, cushioning therefore the peaks of connection current. Once the preload resistances have reduced the current peaks that take place in the connection of the capacitor, automatic opening of the auxiliary contacts occurs with the objective of not having unnecessary losses.

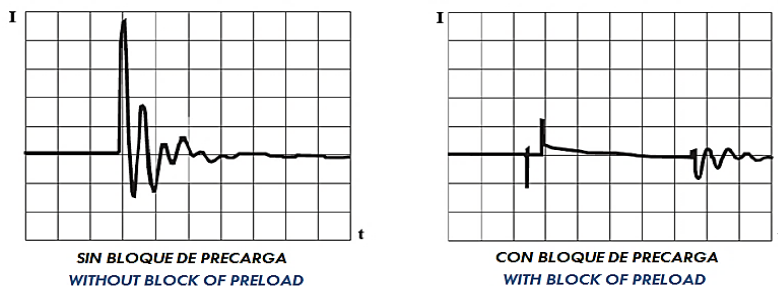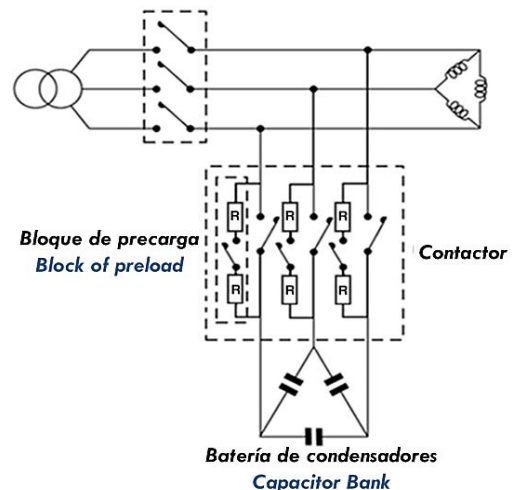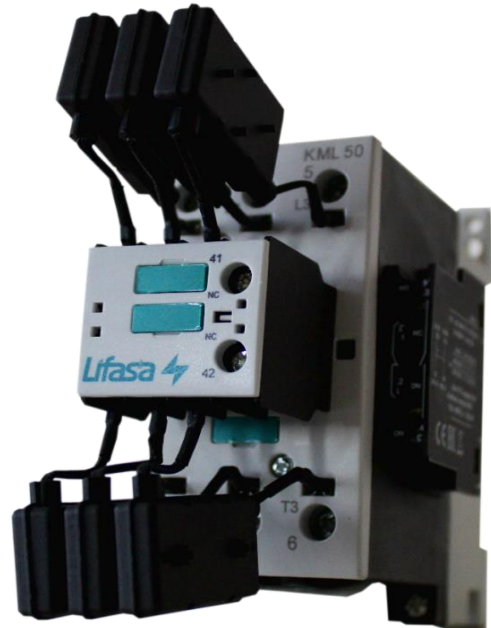


Referencia Part number	Potencia reactiva máxima (kvar) Maximum reactive power (kvar)					Pérdidas totales at Ie/400V/AC6b Total losses (W)	In (A)
	230~240V (50/60 Hz)	400~440V (50/60 Hz)	460~480V (50/60 Hz)	500~550V (50/60 Hz)	600~690V (50/60 Hz)		
KML12	6,7	12,5	14	15	18	8,98	18
KML25	14	25	29	30	35	13,43	36
KML30	20	30	33	35	40	15,56	44
KML50	29	50	58	60	70	30,66	72
KML60	32	60	65	70	80	27,9	87
KML80	45	80	90	100	115	54,26	116

CARACTERÍSTICAS TÉCNICAS / TECHNICAL CHARACTERISTICS


	KML 12	KML 25 / KML 30	KML 50	KML 60	KML 80
Bobina de tensión Coil Voltage	230 V				
Tolerancia bobina de tensión Coil voltage tolerance	0,85 to 1,1 Un				
Frecuencia Frequency	50 / 60 Hz				
Tensión nominal de empleo Insulating rating	690 V				
Endurancia eléctrica Electrical endurance	250.000	125.000	125.000	125.000	75.000
Grado de protección Degree of protection	IP 20				IP 00
Temperatura de funcionamiento Operating temperature	-25° hasta 55° -25° to 55°				
NºContactos auxiliares Auxiliary contacts N°	2 NC	2 NC 1 NO	2 NC 1 NO	2 NC 1 NO	2 NO + 2 NC
Peso (kg) Weight (kg)	0,316	0,40	0,945	0,968	2,45
Montaje Assembly	Carril Din o atornillado DIN track or screwed				
Par de apriete (Nm) Contactos de potencia Contactos auxiliares Tightening torque (Nm) Main circuit Auxiliary circuit	1,2 0,8	1,6 0,8	3-4 0,8	3-4 0,8	2,5-3 0,8

DIMENSIONS / DIMENSIONS


KML 12

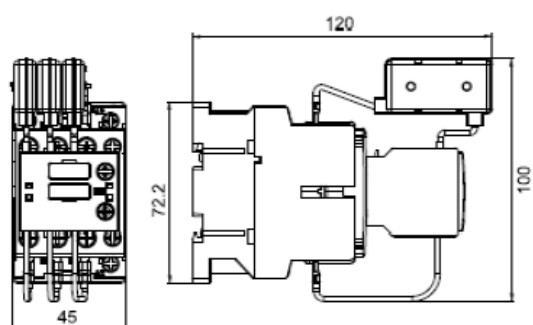

KML 25

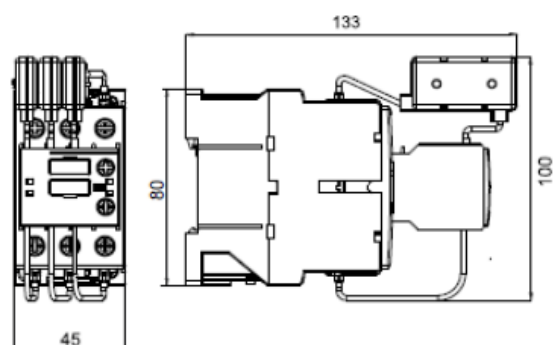


KML 30

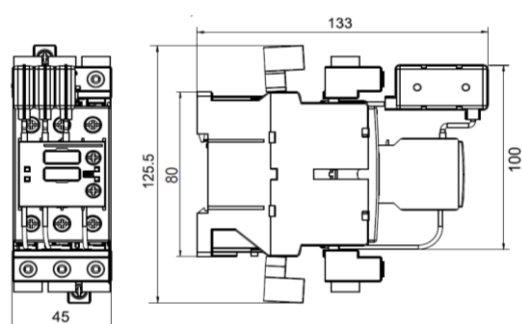

KML 50 / KML 60



KML 80

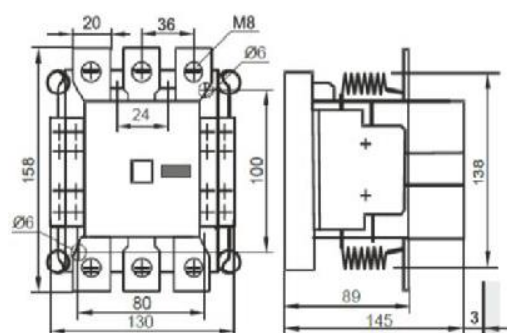



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

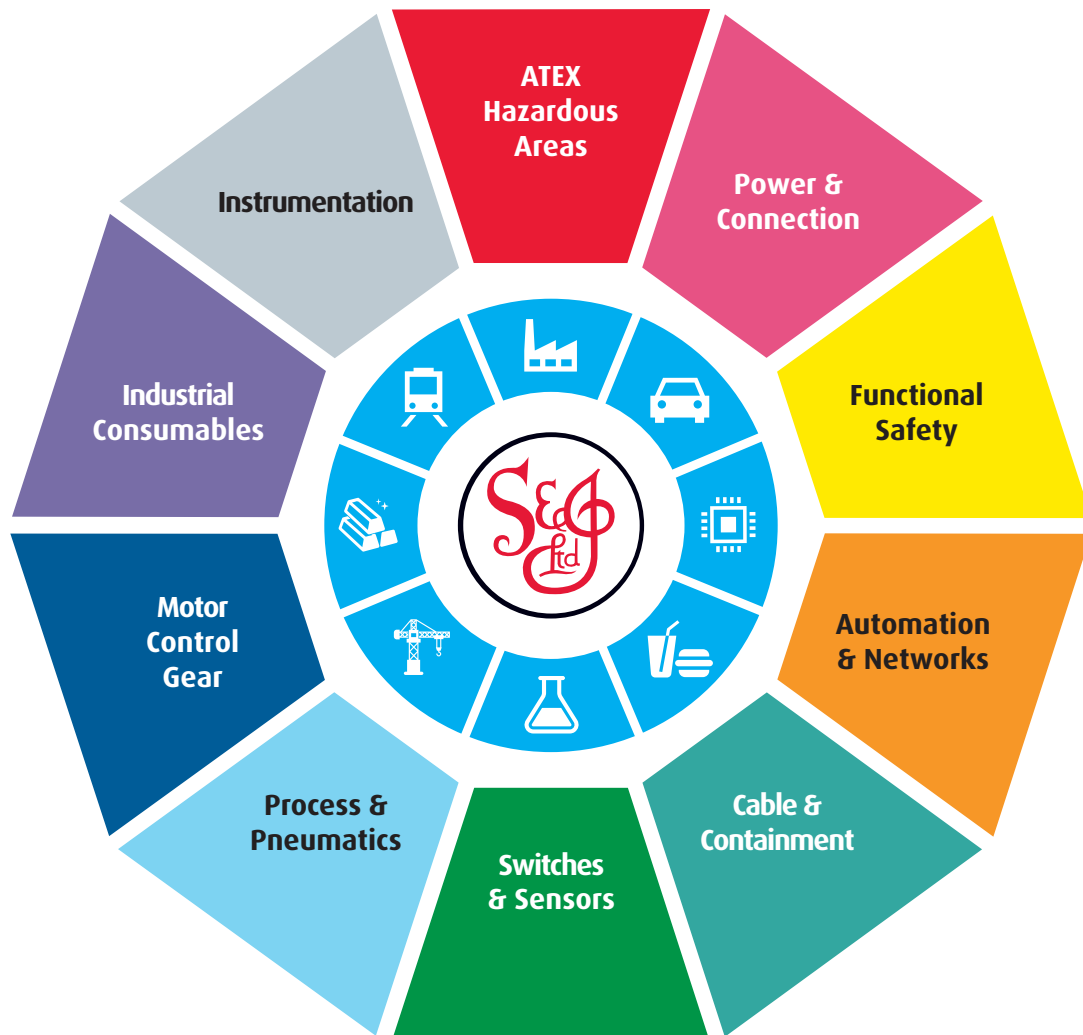

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk