


Inductive sensor


NCN8-18GM40-N0-10M



- 8 mm non-flush
- Stainless steel housing
- Usable up to SIL 2 acc. to IEC 61508

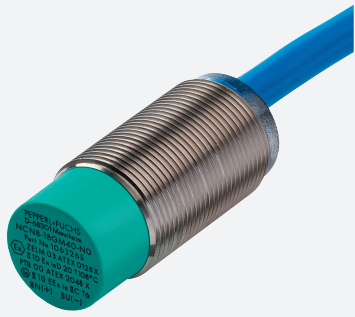

Dimensions



Technical Data

General specifications

| | | |
|----------------------------|-------|--------------------------|
| Switching function | | Normally closed (NC) |
| Output type | | NAMUR |
| Rated operating distance | s_n | 8 mm |
| Installation | | non-flush |
| Assured operating distance | s_a | 0 ... 6.48 mm |
| Actual operating distance | s_r | 7.2 ... 8.8 mm typ. 8 mm |
| Reduction factor r_{AI} | | 0.42 |
| Reduction factor r_{Cu} | | 0.4 |
| Reduction factor r_{304} | | 0.72 |
| Output type | | 2-wire |

Nominal ratings

| | | |
|---------------------|-------|--------------------------------------|
| Nominal voltage | U_o | 8.2 V (R_i approx. 1 k Ω) |
| Switching frequency | f | 0 ... 300 Hz |

Release date: 2022-06-20 Date of issue: 2022-06-20 Filename: 70133268_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | | |
|---|---|---|
| Hysteresis | H | 1 ... 15 typ. 5 % |
| Reverse polarity protection | | reverse polarity protected |
| Short-circuit protection | | yes |
| Current consumption | | |
| Measuring plate not detected | | min. 3 mA |
| Measuring plate detected | | ≤ 1 mA |
| Switching state indicator | | all direction LED, yellow |
| Functional safety related parameters | | |
| Safety Integrity Level (SIL) | | SIL 2 |
| MTTF _d | | 2040 a |
| Mission Time (T _M) | | 20 a |
| Diagnostic Coverage (DC) | | 0 % |
| Compliance with standards and directives | | |
| Standard conformity | | |
| NAMUR | | EN 60947-5-6:2000 IEC 60947-5-6:1999 |
| Standards | | EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012 |
| Approvals and certificates | | |
| IECEX approval | | |
| Equipment protection level Ga | | IECEX PTB 11.0037X |
| Equipment protection level Gb | | IECEX PTB 11.0037X |
| Equipment protection level Da | | IECEX PTB 11.0037X |
| Equipment protection level Mb | | IECEX PTB 11.0037X |
| ATEX approval | | |
| Equipment protection level Ga | | PTB 00 ATEX 2048 X |
| Equipment protection level Gb | | PTB 00 ATEX 2048 X |
| Equipment protection level Da | | PTB 00 ATEX 2048 X |
| EAC conformity | | TR CU 012/2011 |
| UL approval | | |
| Ordinary Location | | E87056 |
| Hazardous Location | | E501628 |
| Control drawing | | 116-0452 |
| CCC approval | | |
| Hazardous Location | | 2020322315002255 |
| NEPSI approval | | |
| NEPSI certificate | | GYJ16.1393X |
| ANZEx | | 18.3018X |
| KCC approval | | |
| Hazardous Location | | 09-AV4BO-0225 |
| Ambient conditions | | |
| Ambient temperature | | -25 ... 100 °C (-13 ... 212 °F) |
| Storage temperature | | -40 ... 100 °C (-40 ... 212 °F) |
| Mechanical specifications | | |
| Connection type | | cable |
| Housing material | | Stainless steel 1.4305 / AISI 303 |
| Sensing face | | PBT |
| Degree of protection | | IP66 / IP67 |
| Cable | | |
| Cable diameter | | 6 mm ± 0.2 mm |
| Bending radius | | > 10 x cable diameter |
| Material | | PVC |

Release date: 2022-06-20 Date of issue: 2022-06-20 Filename: 70133268_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
www.pepperl-fuchs.com

 USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


 Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**






Technical Data

| | | |
|----------------------------|---|-------------------------|
| Core cross section | | 0.75 mm ² |
| Length | L | 10 m |
| General information | | |
| Use in the hazardous area | | see instruction manuals |

Connection



Accessories

| | | |
|---|-----------------|---|
|  | KCD2-E2L | Sensor output interface terminal with lead breakage monitoring |
|  | CPZ18B03 | Mounting Bracket with swivel nut |
|  | BF 18-F | Plastic mounting adapter, 18 mm |
|  | BF 5-30 | Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm |
|  | BF 18 | Mounting flange, 18 mm |



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk