


# Product datasheet

Specifications

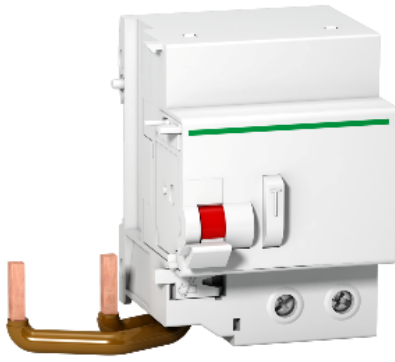

## Vigi C120 - earth leakage add-on block - 2P - 30 mA - class AC

Local distributor code: 397540118 A9N18563

### Main

Product or component type	Add-on residual current devices
Device short name	Vigi C120
Poles description	2P
[In] rated current	125 A
Network type	AC
Earth-leakage sensitivity	30 mA
Earth-leakage protection time delay	Instantaneous
Earth-leakage protection class	Type AC

### Complementary

Device location in system	Outgoer
Network frequency	50/60 Hz
[Ue] rated operational voltage	230...240 V AC 50/60 Hz
Residual current tripping technology	Voltage independent
[Ui] rated insulation voltage	500 V AC 50/60 Hz conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2
Mounting mode	Clip-on
Mounting support	35 mm symmetrical DIN rail
Electrical connection to mcb	By screws
9 mm pitches	7
Height	95 mm
Width	117 mm
Depth	73 mm
Net weight	0.325 kg
Colour	White
Mechanical durability	20000 cycles
Connections - terminals	Tunnel type terminals 1...35 mm <sup>2</sup> flexible Tunnel type terminals 1...50 mm <sup>2</sup> rigid

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Wire stripping length	15 mm
Tightening torque	3.5 N.m

## Environment

Standards	EN 61009
IP degree of protection	IP20
Pollution degree	3 conforming to IEC 60947-2
Ambient air temperature for operation	-5...60 °C
Ambient air temperature for storage	-40...60 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	431.0 g
Package 1 Height	9.3 cm
Package 1 width	13.5 cm
Package 1 Length	13.5 cm
Unit Type of Package 2	S03
Number of Units in Package 2	8
Package 2 Weight	3.892 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty

Warranty	18 months
----------	-----------



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**