


[RFS-12P] Stainless Steel Level Switch



Material	
Stem	SUS304
Float	SUS304
Stopper	SUS304
Nut	SUS304

Specification		
Temperature Range (Atm. Pressure)		-40°C ~ +120°C
Pressure Resistance (Room Temp.)		0.5MPa
Specific Gravity of the liquid		Heavier than 0.8
Electric Specs.	Max. Contact Capacity	50W DC/AC
	Max. Voltage	300V DC/AC
	Max. Current	0.5A DC/AC

Dimension

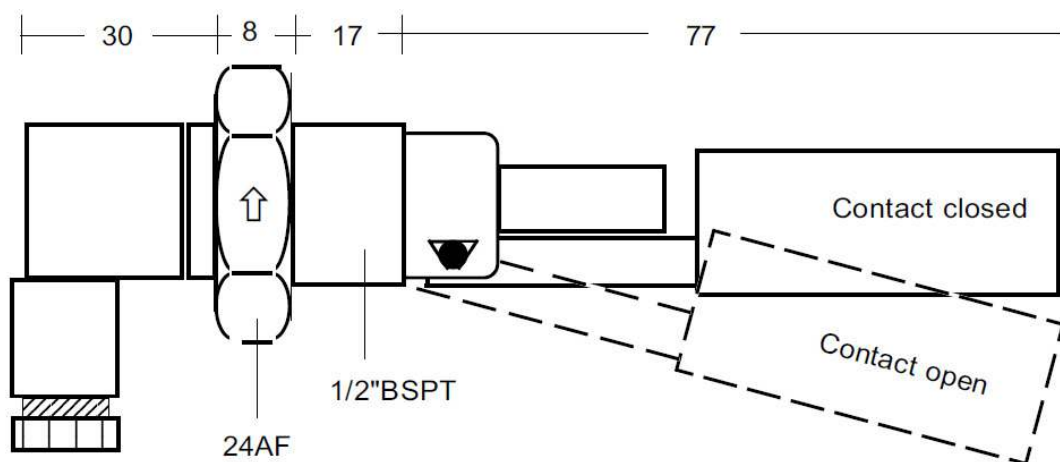



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk