



CA10

Type Size: S0

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Sample image

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Rated insulation voltage Ui								
			Voltage (V)	AC / DC				
			690	AC / DC				
Rated impulse withstand voltage Uimp								
Voltage (kV)		Overvoltage category	Pollution degree	Supply system		Function		
6		III	3	Valid for lines with grounded common neutral termination		switch		
4		III	3	Valid for lines with grounded common neutral termination		Switch disconnector		
Rated uninterrupted current Iu/Ith								
Current (A)		Ambient temperature (°C)		Peak temperature (°C)	additional requirements			
20		55		60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Conventional enclosed thermal current Ithe								
Current (A)	Ambient temperature (°C)		Peak temperature (°C)	Additional requirements		No. of stages (from - to)	Mounting	Mounting size
20	35		40	Ambient temperature +35°C during 24 hours with peaks up to +40°C		--	--	--
Rated operational current Ie								
Utilization category				Voltage (V)		Current (A)		
AC-15				220 - 240		6		
AC-15				380 - 440		4		
AC-20A				690		20		
AC-21A				20 - 690		20		
AC-22A				220 - 500		20		
AC-22A				660 - 690		20		
Rated operational power								
Utilization category			Voltage (V)	No. of phases	No. of poles		Power (kW)	
AC-6b			380 - 400	3	3		--	
AC-6b			220 - 230	1	2		--	
AC-2			220 - 240	3	3		4	
AC-2			380 - 440	3	3		7,50	
AC-2			500 - 500	3	3		10	
AC-2			660 - 690	3	3		10	
AC-3			220 - 240	3	3		3	
AC-3			380 - 440	3	3		5,50	
AC-3			500 - 500	3	3		5,50	
AC-3			660 - 690	3	3		5,50	
AC-3			110 - 120	1	2		0,60	
AC-3			220 - 240	1	2		2,20	
AC-3			380 - 440	1	2		3	
AC-4			220 - 240	3	3		0,55	
AC-4			380 - 440	3	3		1,50	
AC-4			500 - 500	3	3		1,50	
AC-4			660 - 690	3	3		1,50	
AC-4			110 - 120	1	2		0,30	
AC-4			220 - 240	1	2		0,75	
AC-4			380 - 440	1	2		1,50	

Rated operational power				
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-23A	220 - 240	3	3	3,70
AC-23A	380 - 440	3	3	7,50
AC-23A	500 - 500	3	3	7,50
AC-23A	660 - 690	3	3	7,50
AC-23A	110 - 120	1	2	0,75
AC-23A	220 - 240	1	2	2,50
AC-23A	380 - 440	1	2	3,70
Max Fuse Rating IEC				
Fuse characteristic	No. of Fuses			Current (A)
gG	1			25

UL60947-4-1 , UL508

Rated insulation voltage Ui			
		Voltage (V)	AC / DC
		300	AC
Rated thermal current			
	Current (A)	Ambient temperature (°C)	Additional Text
	20	0 - 40	--

CSA

Rated insulation voltage Ui			
		Voltage (V)	AC / DC
		300	AC
Rated thermal current			
	Current (A)	Ambient temperature (°C)	Additional Text
	20	0 - 40	--

GENERAL TECHNICAL INFORMATION

Tightening torque of screws				
		tightening torque (Nm)		tightening torque (lb-in)
		0,60		5
Rated short-time withstand current Icw				
		Time (s)		Current (A)
		1		140
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0.5mm²	Copper
solid wire	Min.	2	0.5mm²	Copper
flexible wire	Min.	1	0.75mm²	Copper
flexible wire	Min.	2	0.75mm²	Copper
flexible wire	Max.	2	2.5mm²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper

Approbations	
Specification	Marking
EAC	
CE marking	
UK Directives	
Lloyd's Register EMEA	
IEC 60947-3; EN 60947-3; VDE 0660 Teil107	IEC 60947-3 EN 60947-3
UL 60947-4-1; CSA C22.2 No. 60947-4-1	 LISTED 7787

Approbations		
Specification	Marking	
CSA C.22.2 No.14		
GB/T14048.3	 GB/T14048.3	
Russian Maritime Register of Shipping		
Power loss per pole		
	Power (W)	
	0,90	
Conditions during transport and storing		
	Minimum temperature (°C)	Maximum temperature (°C) additional requirements
	-40	85 In case of temperatures below -5°C no shock load permissible
Shock / Vibration		
Type of oscillation	Values	
Resistance to vibration	Min. 4g, 2-100Hz, 1,6mm	
Resistance to shock	Min. 5g, 6ms	
Resistance to vibration	IEC 61373 (1999) Category 1, Class B	
Resistance to shock	min. 5g, 30ms	
General Information		
Text		
- DC switching capacity applies to ON/OFF switches. - Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - Use copper wire only. Do not coat the wire end with tin. - Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications. - After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.		
Operating temperature		
	Min. Temperature [°C]	Max. Temperature [°C]
	-25	60



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

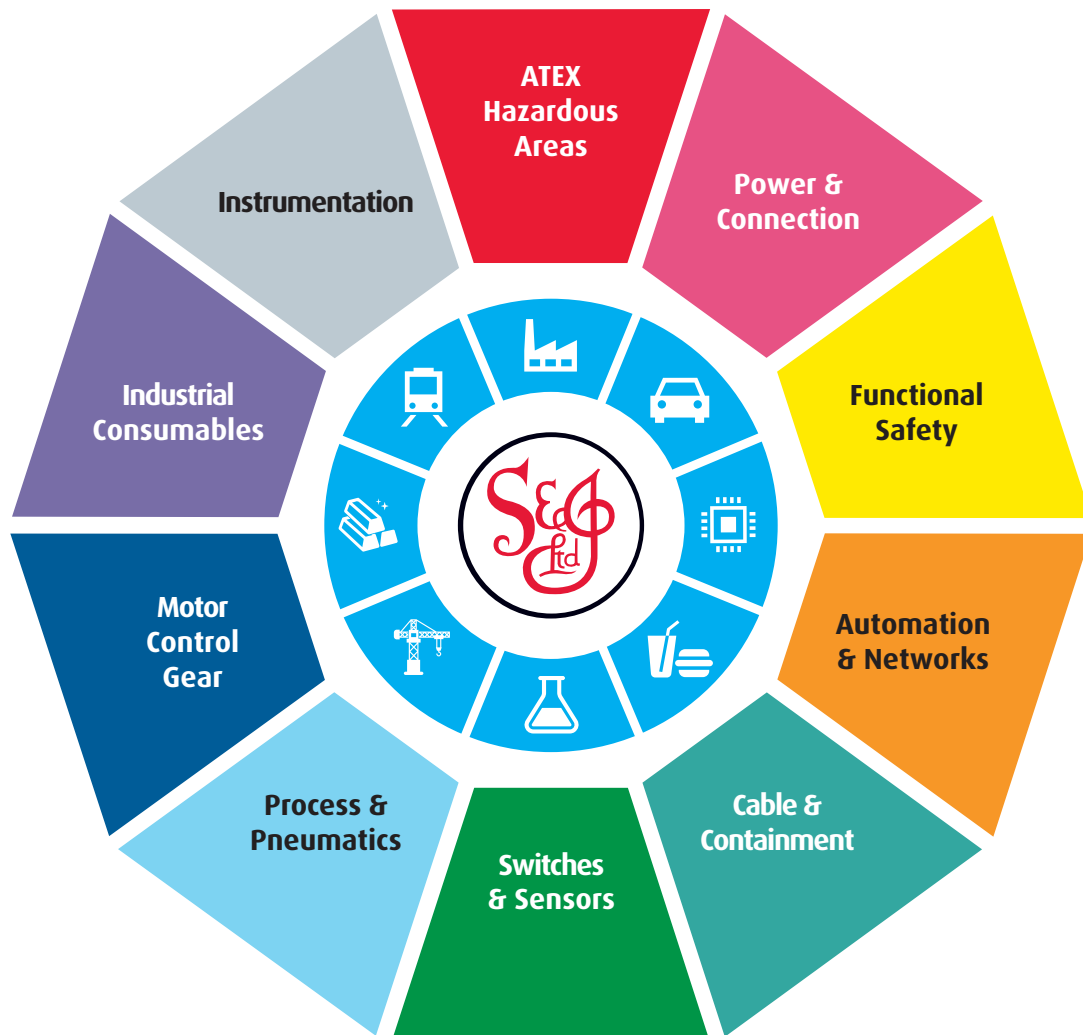

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk