


# .....Dialight



## Dialight® LED High Bay

Technical Specification Sheet - CE, ENEC

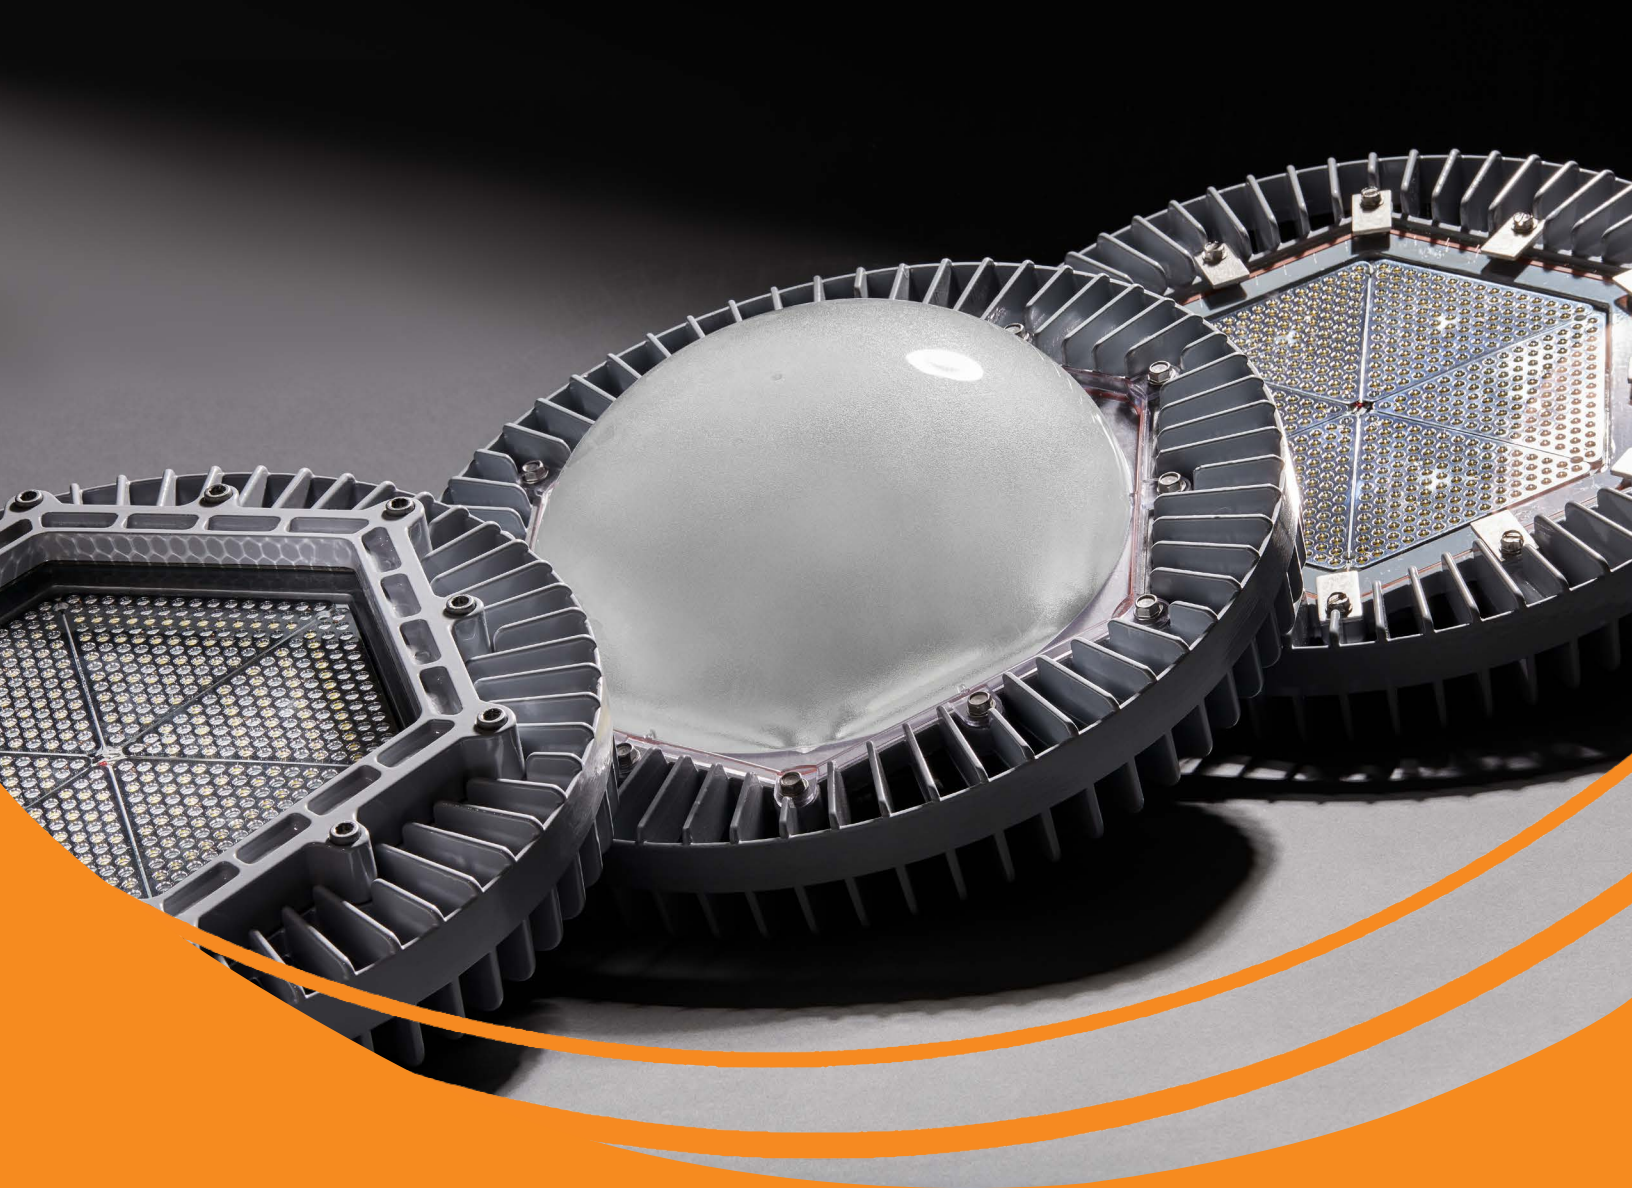

March 2018



## Vigilant® LED High Bay

### Technical Specifications



**Corded Model**

**Mechanical Information:**

**Fixture weight:**  
8.2 kg (18 lbs)

**Shipping weight:**  
10.9 kg (24 lbs)

**Mounting:**  
Stainless Steel Hook

**Power Cord:**  
3 meters, H07RN-F Heavy Duty

**Prefix:** HEE

**Certifications & Ratings:**

|   |                                       |
|---|---------------------------------------|
| EN 60598-1:2015                           | IP66 to EN 60529                      |
| EN 60598-2-1 (ed.1), IEC 60598-2-1 (ed.8) | IK10 to EN 50102 (Polycarbonate lens) |
| EN 60598-2-24:2013                        | IK06 to EN 50102 (Acrylic lens)       |
| EN 62471:2008, EN 62778:2014              | IK05 to EN 50102 (Glass lens)         |
| EN 62493:2015                             | D-Marking to EN 60598 2-24            |
| IEC60068                                  | ENEC                                  |
| Salt spray testing - severity 1           | L70 >150,000 hours @ 25°C ambient     |

**Variable Dimming as Standard:**

**Variable Dimming Control:** 0-10 VDC

**Dimming Range:** 10 VDC = 100% light output  
0 VDC = <5% light output

**Occupancy Sensor:**

**Mounting Height:** Up to 12M  
**Ingress Protection:** IP66

**Electrical Specifications:**

**Operating Voltage:** 100-277 VAC  
120-250 VDC

**Total system power consumption:** See table

**Operating Temp:** -40°C to +65°C

**Harmonics:** IEC 61000-3-2

**Noise requirement /EMC:** EN 61547: 2009  
Radiated and Conducted Emissions: EN 55015

**EMC Immunity:** EN 61547: 2009

**Transient protection:** Protection devices capable of handling up to 10kV. Tested for 10kV/2 ohm combination wave, as per IEEE C62.41, line-line and line ground

**THD:** < 20%

**Power Factor:** > 0.9

**Construction:**

**Housing:** Copper-free aluminium

**Finish:** Superior dual coat finish  
-Sealed polyester topcoat  
-Chemical-resistant epoxy primer

**Lens:** See table

**Gaskets:** Silicone free

**Screws:** Stainless steel 316

**Photometric Information:**

**CRI:** 80

**CCT:** 5000K (cool white)  
4000K (neutral white)

All values typical unless otherwise stated (tolerance +/- 10%)



**Wiring Box with Occupancy Sensor**

**Mechanical Information:**

**Fixture weight:**  
9.9 kg (22 lbs)

**Shipping weight:**  
12.3 kg (27 lbs)

**Mounting:**  
Various Kits (see page 17)

**Wiring Box Cable Entries:**  
M25 x 2

**Terminals:**  
4mm<sup>2</sup> x 5

**Prefix:** HWE



**Integrated Wiring Box**

**Mechanical Information:**

**Fixture weight:**  
9.1 kg (20 lbs)

**Shipping weight:**  
11.8 kg (26 lbs)

**Mounting:**  
Various Kits (see page 17)

**Wiring Box Cable Entries:**  
M25 x 3

**Terminals:**  
4mm<sup>2</sup> x 5

**Prefix:** HWE

|                       | Comparison |          |
|-----------------------|------------|----------|
|                       | Warranty   | L70      |
| Dialight LED High Bay | 10yr       | >150,000 |
| Metal Halide          | 1          | 15,000   |
| High Pressure Sodium  | 1          | 20,000   |



# Vigilant® LED High Bay

## Ordering Information

| Integrated Wiring Box - comes standard with bracket HBXW3 |                    |        |       |      |                          |       |     |                              |                   |
|---|--------------------|--------|-------|------|--------------------------|-------|-----|------------------------------|-------------------|
| Part Number   | Legacy Part Number | Lumens | Watts | lm/W | Voltage                  | CCT   | CRI | Lens                         | Beam Distribution |
| HWE7MC2EDANNGN  | HEEGMC4PNJNG       | 27,000 | 186   | 145  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2EDANNGN  | HEE2MC4PNJNG       | 26,000 | 186   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2EDANNGN  | HEELMC4PNJNG       | 25,000 | 186   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2EDANNGN  | HEEGEC4PNJNG       | 27,000 | 186   | 145  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2EDANNGN  | HEE2EC4PNJNG       | 26,000 | 186   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWELEC2EDANNGN  | HEELEC4PNJNG       | 25,000 | 186   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HWE7MC2CDANNGN  | HEEGMC4KNJNG       | 19,500 | 129   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2CDANNGN  | HEE2MC4KNJNG       | 18,750 | 129   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2CDANNGN  | HEELMC4KNJNG       | 18,000 | 129   | 130  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2CDANNGN  | HEEGEC4KNJNG       | 18,000 | 129   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2CDANNGN  | HEE2EC4KNJNG       | 17,250 | 129   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWELEC2CDANNGN  | HEELEC4KNJNG       | 16,750 | 129   | 130  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HWE7MC2BDANNGN  | HEEGMC4GNJNG       | 14,250 | 102   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2BDANNGN  | HEE2MC4GNJNG       | 13,750 | 102   | 135  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2BDANNGN  | HEELMC4GNJNG       | 13,500 | 102   | 132  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2BDANNGN  | HEEGEC4GNJNG       | 14,250 | 102   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2BDANNGN  | HEE2EC4GNJNG       | 13,750 | 102   | 135  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWELEC2BDANNGN  | HEELEC4GNJNG       | 13,500 | 102   | 132  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HWE7MC2ADANNGN  | HEEGMC4DNJNG       | 11,250 | 80    | 141  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2ADANNGN  | HEE2MC4DNJNG       | 10,750 | 80    | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2ADANNGN  | HEELMC4DNJNG       | 10,500 | 80    | 131  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2ADANNGN  | HEEGEC4DNJNG       | 11,250 | 80    | 141  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2ADANNGN  | HEE2EC4DNJNG       | 10,750 | 80    | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWELEC2ADANNGN  | HEELEC4DNJNG       | 10,500 | 80    | 131  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |

### Notes

Note 1: Models in chart above are 5000K CCT. For 4000K CCT change the 6th character from C to N & deduct 3% from the lumen table.

Note 2: Models with integrated wiring box are upgradeable to DALI & Wireless controls. Consult local Dialight sales office for availability.

Note 3: Flat clear acrylic lens available, consult local Dialight sales office for availability.



# Vigilant® LED High Bay

## Ordering Information



| Standard model with 3 Meter Cable & Hook Mount |                    |        |       |      |                          |       |     |                              |                   |
|--|--------------------|--------|-------|------|--------------------------|-------|-----|------------------------------|-------------------|
| Part Number                                    | Legacy Part Number | Lumens | Watts | lm/W | Voltage                  | CCT   | CRI | Lens                         | Beam Distribution |
| HEE7MC2EDHWNGN                                 | HEEGMC4PNHNG       | 27,000 | 186   | 145  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HEE4MC2EDHWNGN                                 | HEE2MC4PNHNG       | 26,000 | 186   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HEELMC2EDHWNGN                                 | HEELMC4PNHNG       | 25,000 | 186   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HEE7EC2EDHWNGN                                 | HEEGEC4PNHNG       | 27,000 | 186   | 145  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HEE4EC2EDHWNGN                                 | HEE2EC4PNHNG       | 26,000 | 186   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HEEEC2EDHWNGN                                  | HEEEC4PNHNG        | 25,000 | 186   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HEE7MC2CDHWNGN                                 | HEEGMC4KNHNG       | 18,000 | 129   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HEE4MC2CDHWNGN                                 | HEE2MC4KNHNG       | 17,250 | 129   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HEELMC2CDHWNGN                                 | HEELMC4KNHNG       | 16,750 | 129   | 130  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HEE7EC2CDHWNGN                                 | HEEGEC4KNHNG       | 18,000 | 129   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HEE4EC2CDHWNGN                                 | HEE2EC4KNHNG       | 17,250 | 129   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HEEEC2CDHWNGN                                  | HEEEC4KNHNG        | 16,750 | 129   | 130  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HEE7MC2BDHWNGN                                 | HEEGMC4GNHNG       | 14,250 | 102   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HEE4MC2BDHWNGN                                 | HEE2MC4GNHNG       | 13,750 | 102   | 135  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HEELMC2BDHWNGN                                 | HEELMC4GNHNG       | 13,500 | 102   | 132  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HEE7EC2BDHWNGN                                 | HEEGEC4GNHNG       | 14,250 | 102   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HEE4EC2BDHWNGN                                 | HEE2EC4GNHNG       | 13,750 | 102   | 135  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HEEEC2BDHWNGN                                  | HEEEC4GNHNG        | 13,500 | 102   | 132  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HEE7MC2ADHWNGN                                 | HEEGMC4DNHNG       | 11,250 | 80    | 141  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HEE4MC2ADHWNGN                                 | HEE2MC4DNHNG       | 10,750 | 80    | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HEELMC2ADHWNGN                                 | HEELMC4DNHNG       | 10,500 | 80    | 131  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HEE7EC2ADHWNGN                                 | HEEGEC4DNHNG       | 11,250 | 80    | 141  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HEE4EC2ADHWNGN                                 | HEE2EC4DNHNG       | 10,750 | 80    | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HEEEC2ADHWNGN                                  | HEEEC4DNHNG        | 10,500 | 80    | 131  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |

### Notes

Note 1: Models in chart above are 5000K CCT. For 4000K CCT change the 6th character from C to N & deduct 3% from the lumen table.

Note 2: Flat clear acrylic lens available, consult local Dialight sales office for availability.



# Vigilant® LED High Bay

## Ordering Information

| Occupancy Sensor Models - comes standard with bracket HBXW3 |                    |        |       |      |                          |       |     |                              |                   |
|---|--------------------|--------|-------|------|--------------------------|-------|-----|------------------------------|-------------------|
| Part Number   | Legacy Part Number | Lumens | Watts | lm/W | Voltage                  | CCT   | CRI | Lens                         | Beam Distribution |
| HWE7MC2EMANNGN  | HEEGMC4PKJNG       | 27,000 | 186   | 145  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2EMANNGN  | HEE2MC4PKJNG       | 26,000 | 186   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2EMANNGN  | HEELMC4PKJNG       | 25,000 | 186   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2EMANNGN  | HEEGEC4PKJNG       | 27,000 | 186   | 145  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2EMANNGN  | HEE2EC4PKJNG       | 26,000 | 186   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWEEC2EMANNGN   | HEEEC4PKJNG        | 25,000 | 186   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HWE7MC2CMANNGN  | HEEGMC4KKJNG       | 19,500 | 129   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2CMANNGN  | HEE2MC4KKJNG       | 18,750 | 129   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2CMANNGN  | HEELMC4KKJNG       | 18,000 | 129   | 130  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2CMANNGN  | HEEGEC4KKJNG       | 18,000 | 129   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2CMANNGN  | HEE2EC4KKJNG       | 17,250 | 129   | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWEEC2CMANNGN   | HEEEC4KKJNG        | 16,750 | 129   | 130  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HWE7MC2BMANNGN  | HEEGMC4GKJNG       | 14,250 | 102   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2BMANNGN  | HEE2MC4GKJNG       | 13,750 | 102   | 135  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2BMANNGN  | HEELMC4GKJNG       | 13,500 | 102   | 132  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2BMANNGN  | HEEGEC4GKJNG       | 14,250 | 102   | 140  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2BMANNGN  | HEE2EC4GKJNG       | 13,750 | 102   | 135  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWEEC2BMANNGN   | HEEEC4GKJNG        | 13,500 | 102   | 132  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |
| HWE7MC2AMANNGN  | HEEGMC4DKJNG       | 11,250 | 80    | 141  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Medium            |
| HWE4MC2AMANNGN  | HEE2MC4DKJNG       | 10,750 | 80    | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Medium            |
| HWELMC2AMANNGN  | HEELMC4DKJNG       | 10,500 | 80    | 131  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Medium            |
| HWE7EC2AMANNGN  | HEEGEC4DKJNG       | 11,250 | 80    | 141  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Glass                  | Oval              |
| HWE4EC2AMANNGN  | HEE2EC4DKJNG       | 10,750 | 80    | 134  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Clear Polycarbonate          | Oval              |
| HWEEC2AMANNGN   | HEEEC4DKJNG        | 10,500 | 80    | 131  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Oval              |

### Notes

Note 1: Models in chart above are 5000K CCT. For 4000K CCT change the 6th character from C to N & deduct 3% from the lumen table.

Note 2: Models with integrated wiring box are upgradeable to DALI & Wireless controls. Consult local Dialight sales office for availability.

Note 3: Flat clear acrylic lens available, consult local Dialight sales office for availability.



# Vigilant® LED Low Bay

## Technical Specifications



**Mechanical Information:**

- Fixture weight:**  
8.2 kg (18 lbs)
- Shipping weight:**  
10.9 kg (24 lbs)
- Mounting:**  
Stainless Steel Hook
- Power Cord:**  
3 meters, H07RN-F Heavy Duty
- Prefix:** LEE

### Corded Models



**Mechanical Information:**

- Fixture weight:**  
9.9 kg (22 lbs)
- Shipping weight:**  
12.3 kg (27 lbs)
- Mounting:**  
Hook
- Wiring Box Cable Entries:**  
M25 x 2
- Terminals:**  
4mm<sup>2</sup> x 5
- Prefix:** LWL

### Low Bay Wiring Box with Occupancy Sensor



**Mechanical Information:**

- Fixture weight:**  
9.1 kg (20 lbs)
- Shipping weight:**  
11.8 kg (26 lbs)
- Mounting:**  
Various Kits (see page 17)
- Wiring Box Cable Entries:**  
M25 x 3
- Terminals:**  
4mm<sup>2</sup> x 5
- Prefix:** LWL

### Integrated Wiring Box

| Comparison           |          |          |
|----------------------|----------|----------|
|                      | Warranty | L70      |
| Dialight LED Low Bay | 10yr     | >150,000 |
| Metal Halide         | 1        | 15,000   |
| High Pressure Sodium | 1        | 20,000   |

**Certifications & Ratings:**

- EN 60598:2015
- EN 60598-2-1 (ed.1), IEC 60598-2-1 (ed.8)
- EN 60598-2-24:2013
- EN 62471:2008, EN 62778:2014
- EN 62493:2010
- IEC60068
- Salt spray testing - severity 1
- IP66 to EN 60529
- IK10 to EN 50102 (Polycarbonate lens)
- IK06 to EN 50102 (Acrylic lens)
- IK05 to EN 50102 (Glass lens)
- D-Marking to EN 60598 2-2
- ENEC
- L70 >150,00 hours @ 25°C ambient

**Variable Dimming as Standard:**

- Variable Dimming Control:** 0-10 VDC
- Dimming Range:** 10 VDC = 100% light output  
0 VDC = <5% light output

**Electrical specifications:**

- Operating Voltage:** 100-277 VAC, 50/60 Hz  
120-250 VDC
- Total system power consumption:** See table
- Operating Temp:** -40°C to +65°C
- Harmonics:** IEC 61000-3-2
- Noise requirement /EMC:** EN 61547: 2009  
Radiated and Conducted Emissions: EN 55015
- EMC Immunity:** EN 61547: 2009
- Transient protection:** Protection devices capable of handling up to 10kV. Tested for 10kV/2 ohm combination wave, as per IEEE C62.41, line-line and line-ground
- THD:** < 20%
- Power Factor:** > 0.9

**Construction:**

- Housing:** Copper-free aluminium
- Finish:** Superior dual coat finish  
-Sealed polyester topcoat  
-Chemical-resistant epoxy primer
- Lens:** See table
- Gaskets:** Silicone free
- Screws:** Stainless steel 316

**Photometric Information:**

- CRI:** 80
- CCT:** 5000K (cool white)  
4000K (neutral white)

All values typical unless otherwise stated (tolerance +/- 10%)



# Vigilant® LED Low Bay

## Ordering Information



| Part Number  | Legacy Part Number | Lumens | Watts | lm/W | Voltage                  | CCT   | CRI | Lens                         | Beam Distribution |
|--|--------------------|--------|-------|------|--------------------------|-------|-----|------------------------------|-------------------|
| <b>Standard Models with 3m Cable &amp; Hook Mount</b>                                  |                    |        |       |      |                          |       |     |                              |                   |
| LEELUC2CDHWNGN   |                    | 18,000 | 154   | 117  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LEELUC2BDHWNGN   |                    | 14,000 | 114   | 123  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LEELUC29DHWNGN   |                    | 9,000  | 80    | 122  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LEELUC26DHWNGN   | LBW1C1DEUH         | 6,000  | 56    | 116  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LEELUC24DHWNGN   | LBW1C5AEUH         | 4,000  | 42    | 101  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| <b>Integrated Wiring Box - comes standard with bracket HBXW3</b>                       |                    |        |       |      |                          |       |     |                              |                   |
| LWELUC2CDANNGN   |                    | 18,000 | 154   | 117  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC2BDANNGN   |                    | 14,000 | 114   | 123  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC29DANNGN   |                    | 9,750  | 80    | 122  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC26DANNGN   |                    | 6,500  | 56    | 116  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC24DANNGN   |                    | 4,250  | 42    | 101  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| <b>Integrated Wiring Box with Occupancy Sensor - comes standard with bracket HBXW3</b> |                    |        |       |      |                          |       |     |                              |                   |
| LWELUC2CMANNGN   |                    | 18,000 | 154   | 117  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC2BMANNGN   |                    | 14,000 | 114   | 123  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC29MANNGN   |                    | 9,750  | 80    | 122  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC26MANNGN   |                    | 6,500  | 56    | 116  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |
| LWELUC24MANNGN   |                    | 4,250  | 42    | 101  | 100-277 VAC, 120-250 VDC | 5000K | 80  | Diffused Domed Polycarbonate | Ultra Wide        |

### Notes


Note 1: Models in chart above are 5000K CCT. For 4000K CCT change the 6th character from C to N & deduct 3% from the lumen table.

Note 2: Models with integrated wiring box are upgradeable to DALI & Wireless controls. Consult local Dialight sales office for availability.


# Dimensional Drawings

## High Bay Models


### Corded Model with Hook Mount

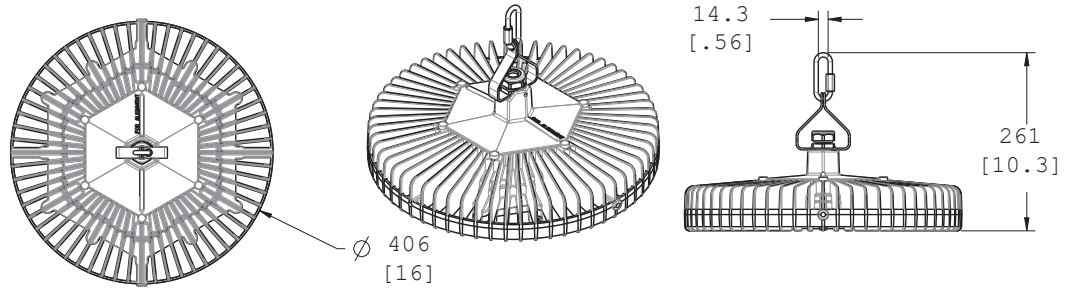

### Wiring Box with Occupancy Sensor

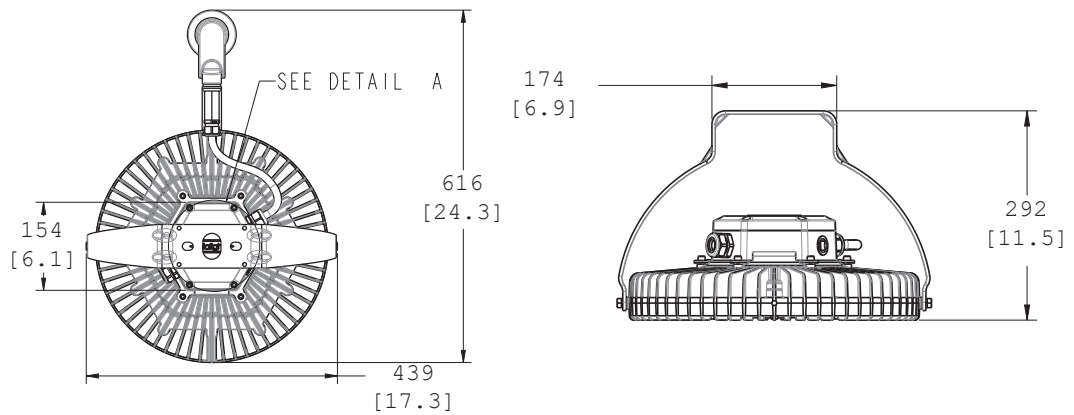


### Integrated Wiring Box

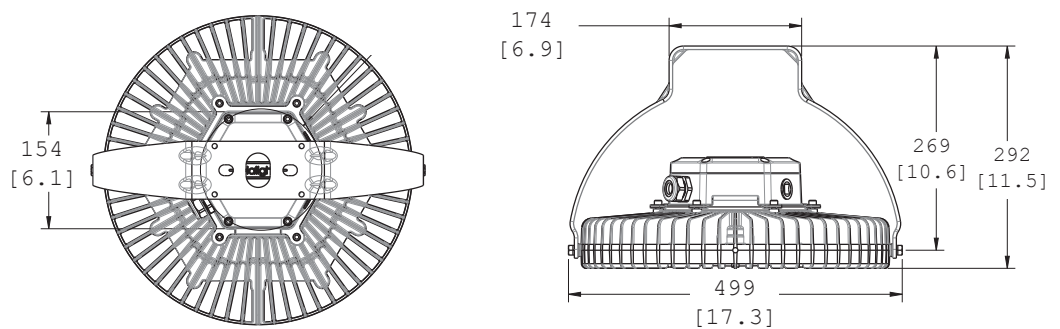


# Dimensional Drawings

## Low Bay Models


### Corded Models with Hook Mount

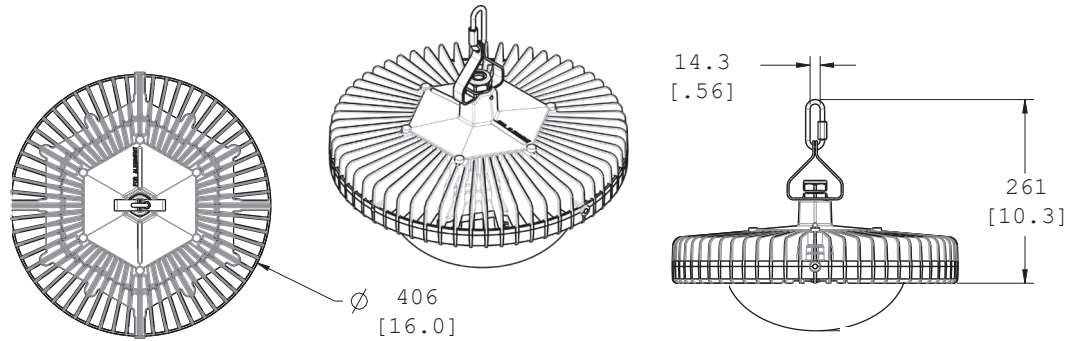

### Wiring Box with Occupancy Sensor

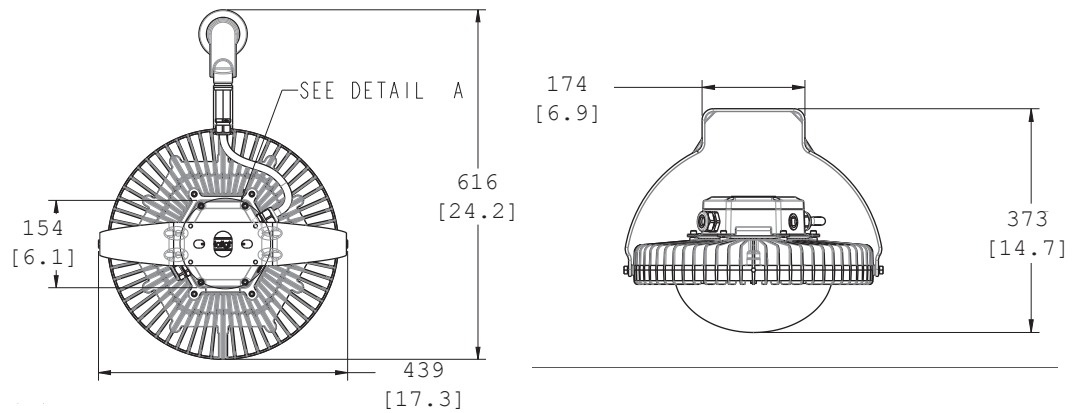


### Integrated Wiring Box

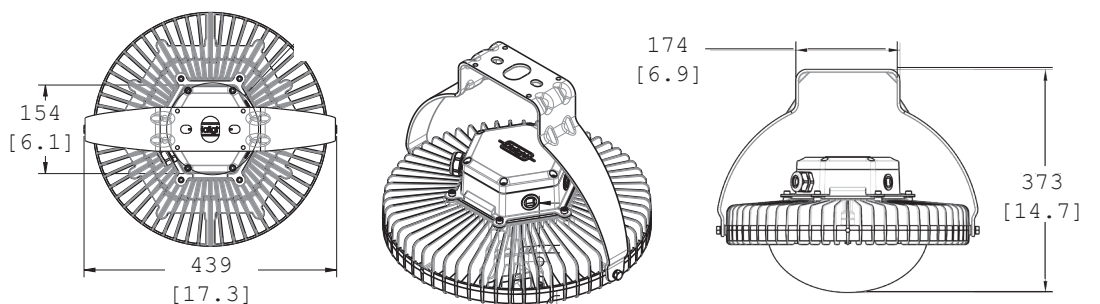

# Beam Distributions

## High Bay Models


### Medium

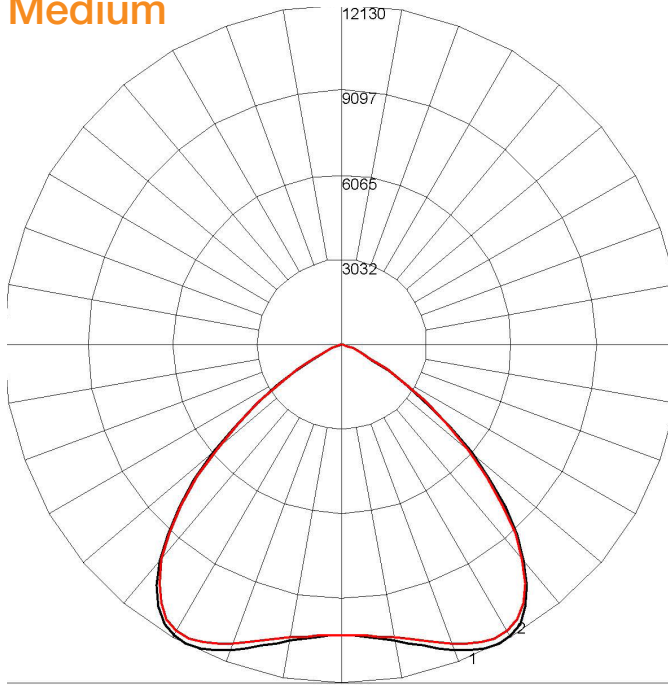

= 0°  
 = 90°

Maximum Candela = 12129.5 Located At Horizontal Angle = 0, Vertical Angle = 27.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)

### Oval

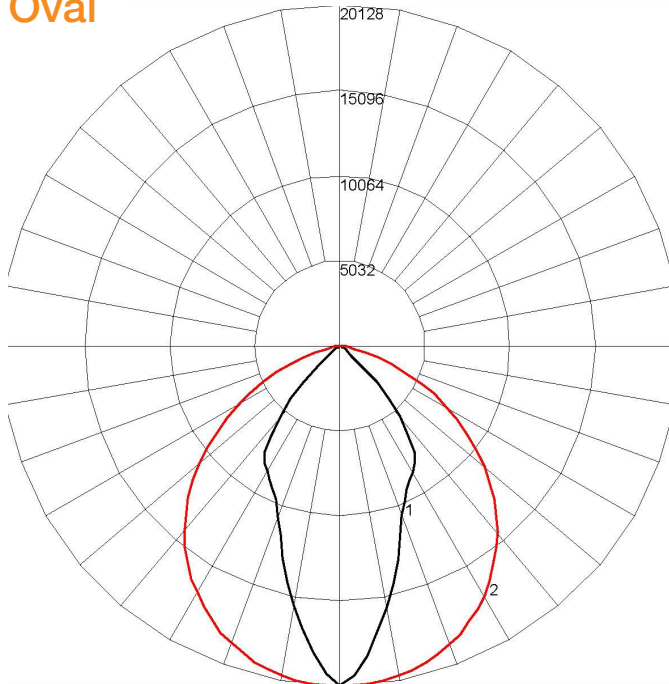


Maximum Candela = 20128.4 Located At Horizontal Angle = 85, Vertical Angle = 2.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)

# Beam Distributions

## Low Bay Models

### Ultra Wide

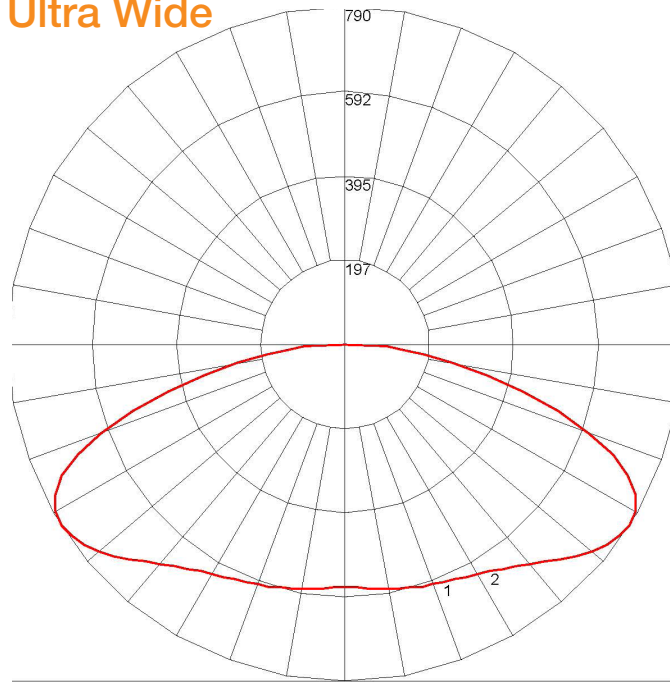

= 0°  
 = 90°

Maximum Candela = 789.7 Located At Horizontal Angle = 0, Vertical Angle = 57.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
 # 2 - Vertical Plane Through Horizontal Angles (90 - 270)

## In Rush Currents

### High Bay Models

| HE Models | Watt | In rush current @ input voltage |         |         | Time duration of in rush current @ input voltage |         |         |
|-----------|------|---------------------------------|---------|---------|--|---------|---------|
|           |      | 120 VAC                         | 230 VAC | 277 VAC | 120 VAC  | 230 VAC | 277 VAC |
| 26K       | 186  | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 19K       | 129  | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 14K       | 102  | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 11K       | 81   | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |

## In Rush Currents

### Low Bay Models

| LE Models | Watt | In rush current @ input voltage |         |         | Time duration of in rush current @ input voltage |         |         |
|-----------|------|---------------------------------|---------|---------|--|---------|---------|
|           |      | 120 VAC                         | 230 VAC | 277 VAC | 120 VAC  | 230 VAC | 277 VAC |
| 18K       | 154W | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 14K       | 114W | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 9K        | 80W  | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 6K        | 56W  | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |
| 4K        | 42W  | 7.7A                            | 14.8A   | 17.8A   | 2ms  | 2ms     | 2ms     |

## Lumen Maintenance Factor

|                 |    | Vigilant High Bay (Hours) |     |       |       |       |       |       |       |        |        |
|-----------------|----|---------------------------|-----|-------|-------|-------|-------|-------|-------|--------|--------|
| Ambient Celsius |    | Ambient                   | 0   | 15000 | 30000 | 45000 | 60000 | 75000 | 90000 | 100000 | 150000 |
| Ambient Celsius | 25 | 100%                      | 98% | 97%   | 96%   | 95%   | 94%   | 93%   | 92%   | 92%    | 89%    |
|                 | 30 | 99%                       | 96% | 95%   | 94%   | 93%   | 92%   | 91%   | 90%   | 90%    | 87%    |
|                 | 35 | 98%                       | 95% | 94%   | 93%   | 92%   | 91%   | 89%   | 89%   | 89%    | 85%    |
|                 | 40 | 97%                       | 94% | 93%   | 92%   | 90%   | 89%   | 89%   | 88%   | 87%    | 83%    |
|                 | 45 | 96%                       | 93% | 91%   | 90%   | 89%   | 87%   | 87%   | 86%   | 85%    | 80%    |
|                 | 50 | 95%                       | 92% | 90%   | 88%   | 87%   | 85%   | 85%   | 84%   | 83%    | 78%    |
|                 | 55 | 94%                       | 90% | 89%   | 87%   | 85%   | 83%   | 83%   | 82%   | 81%    | 75%    |
|                 | 60 | 93%                       | 89% | 87%   | 85%   | 83%   | 82%   | 82%   | 80%   | 79%    | 73%    |
|                 | 65 | 90%                       | 85% | 83%   | 80%   | 78%   | 76%   | 76%   | 74%   | 73%    | 67%    |


# Circuit Breaker

## Loading

| Vigilant        | MAX Lights per C10 | MAX Lights per B16 | MAX Lights per C16 |
|-----------------|--------------------|--------------------|--------------------|
| <b>High Bay</b> |                    |                    |                    |
| 26K             | 4                  | 7                  | 7                  |
| 18K             | 6                  | 9                  | 9                  |
| 14K             | 8                  | 13                 | 13                 |
| 11K             | 10                 | 17                 | 17                 |
| <b>Low Bay</b>  |                    |                    |                    |
| 18K             | 6                  | 10                 | 10                 |
| 14K             | 8                  | 13                 | 13                 |
| 9K              | 14                 | 22                 | 22                 |
| 6K              | 18                 | 31                 | 31                 |
| 4K              | 22                 | 36                 | 36                 |


# Dimming Characterization 0 - 10V

Light Output VS Dimming Voltage

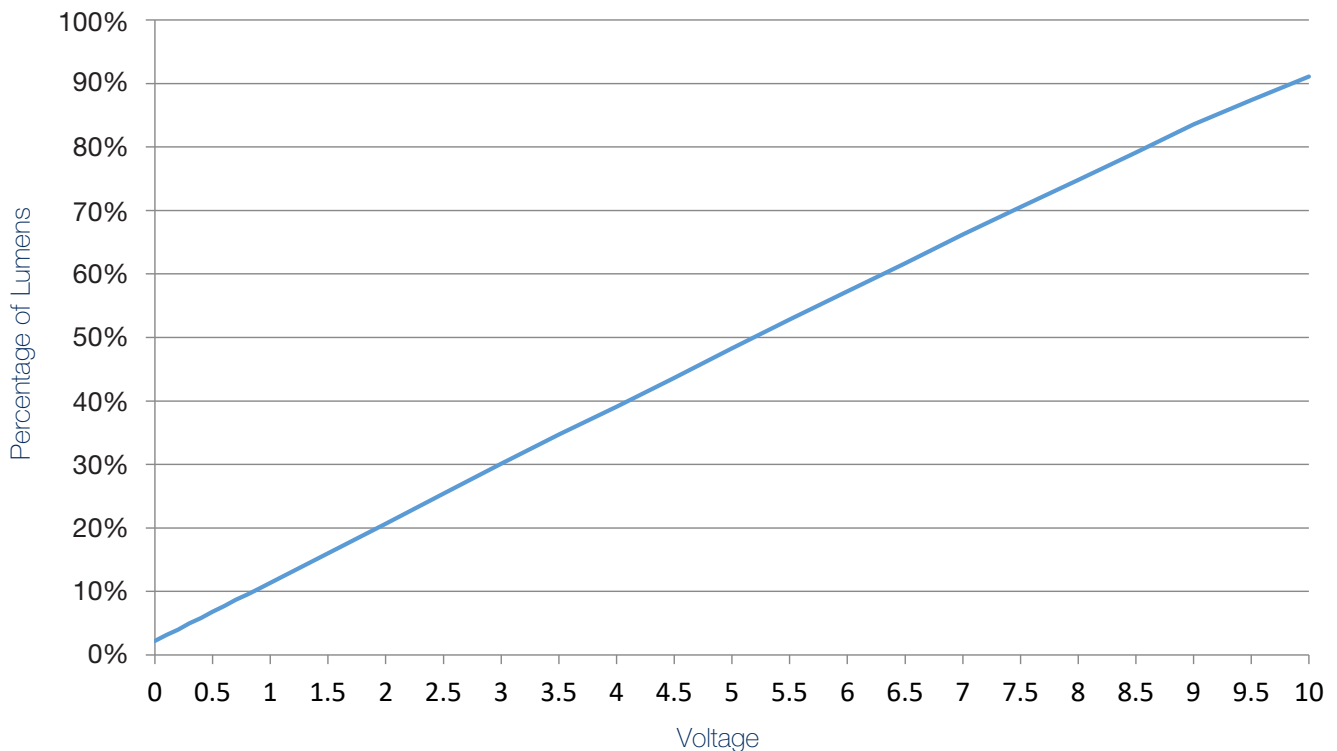

# Thermal Roll-Off

Lumen Degradation

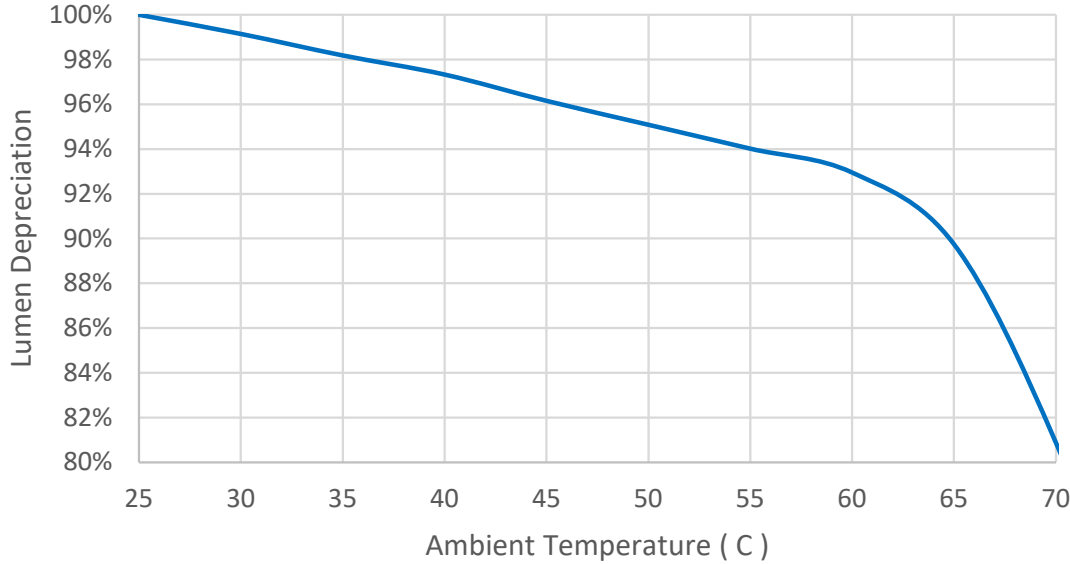

## Accessories


### High Bay Models



- HBXW3-SSL-316M**  
**HBXW3-SSL-304M**
- Stainless steel bracket



- HBXCAB48**
- 48" long stainless steel safety rope (for use with safety bracket)




- HBXSBDK**
- Sand blast kit (dome lens)
- HBXSBDL**
- Sacrificial dome lens



- HBXW3-SSL-304FTM**
- 304 stainless steel forward throw bracket
- HBXW3-SSL-316FTM**
- 316 stainless steel forward throw bracket



- HBXSB Safety Tabs**
- 316 stainless steel
  - Includes 4 tabs



- HBXSBK**
- Sand blast kit (flat lens)
- HBXSBL**
- Sacrificial flat lens




- HBXW3**
- Powder-coated aluminium swivel bracket




- HBXGS**
- Glare shield (internal use only, for use with flat lens)



- HBXFSIRREMOTE**
- Remote for occupancy sensor



- HBXW3EUHOOK**
- Swivel bracket with hanging hook



- HBXOCC100277E**
- Field installable occupancy sensor for models prefixed with HWE or HCE

# Accessories

## Low Bay Models & Dimension Drawings



- HBXW3-SSL-316M**  
**HBXW3-SSL-304M**
- Stainless steel bracket



- HBXCAB48**
- 1.21M long stainless steel safety rope (for use with safety bracket)



- HBXSB**
- 316 stainless steel
  - Includes 4 tabs




- HBXW3-SSL-304FTM**  
**HBXW3-SSL-316FTM**
- 304 stainless steel forward throw bracket
  - 316 stainless steel forward throw bracket




- HBXW3**
- Powder-coated aluminium swivel bracket



- HBXFSIRREMOTE**
- Remote for occupancy sensor






- HBXW3EUHOOK**
- Swivel bracket with hanging hook





- HBXOCC100277E**
- Field installable occupancy sensor for models prefixed with HWE or HCE

HBXW3 - Swivel Bracket and Cable Gland

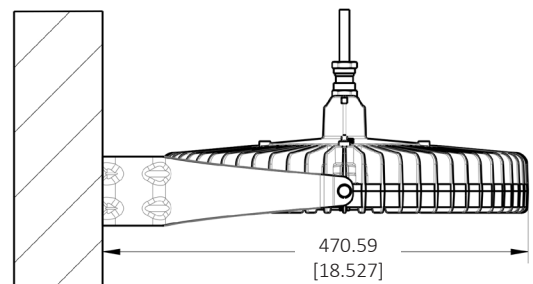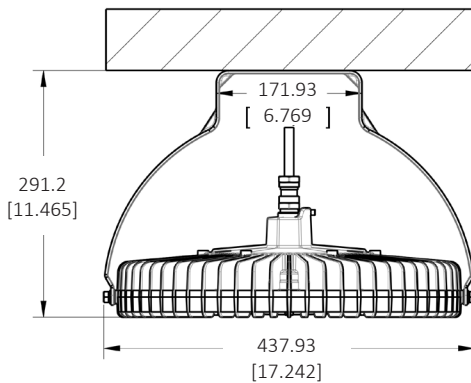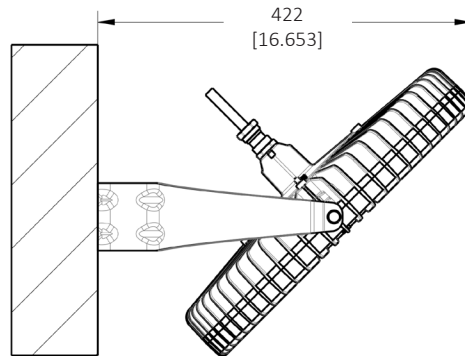


# Occupancy Sensor - Passive Infrared Sensing

## Coverage Top View @ 4m

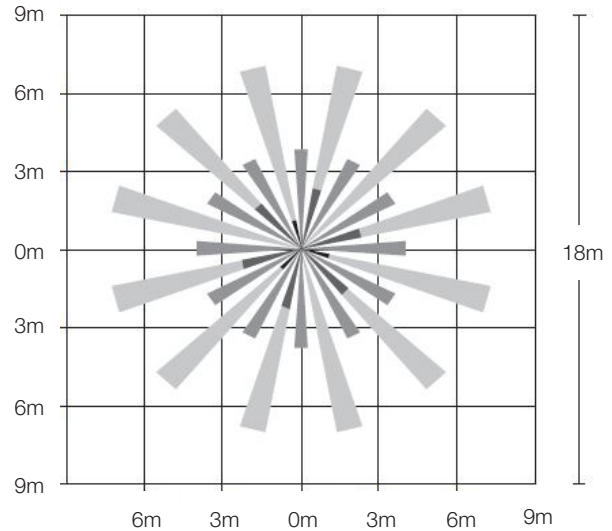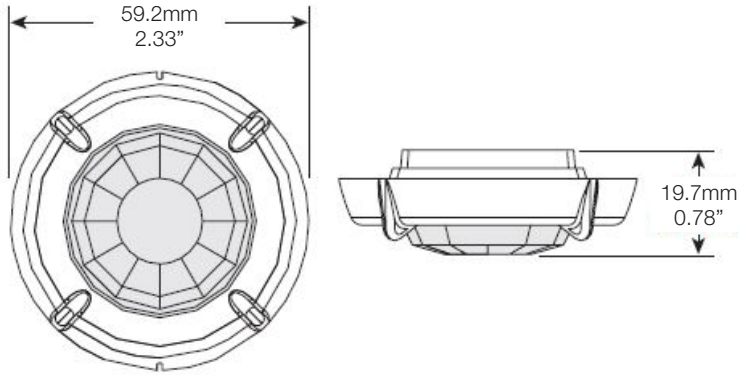



Coverage Side View

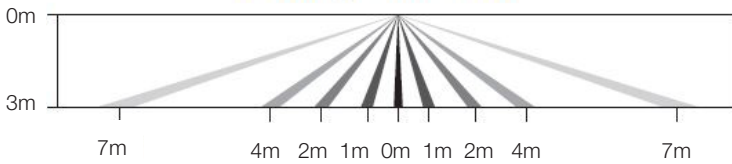


### 360° Coverage

Designed for mounting at heights between 3m and 4m. It provides a 15m diameter coverage area when mounted at a height of 3m, or a 22m diameter coverage at 4m.

## Coverage Top View @ 6m

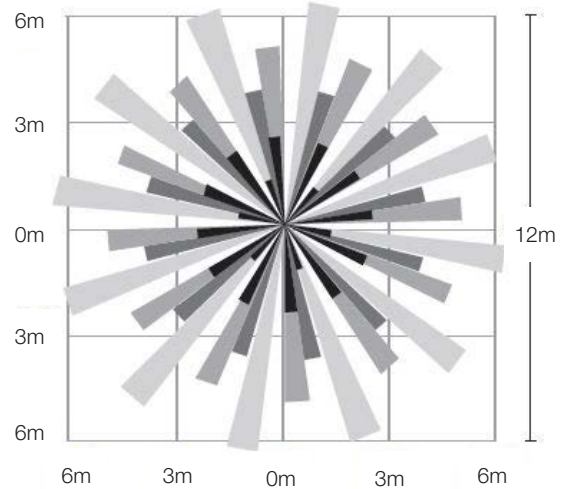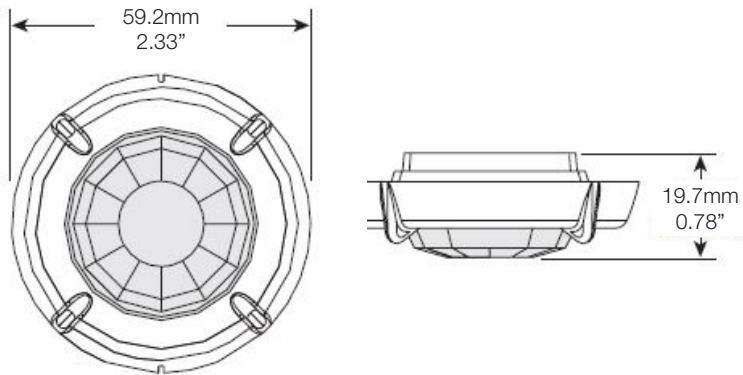

Coverage Side View



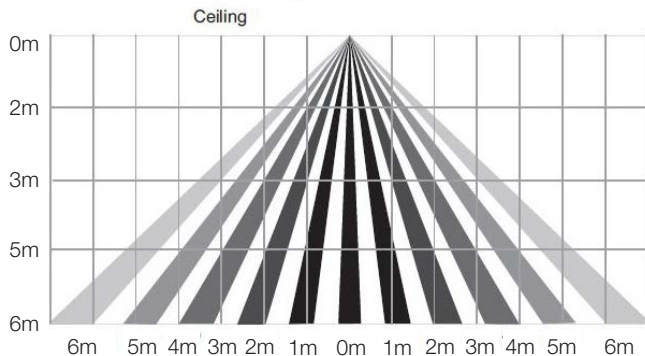


### 360° Coverage

The high density lens covers a 12m diameter area at a height of 6m.

# Occupancy Sensor - Passive Infrared Sensing

## Coverage Top View @ 12m

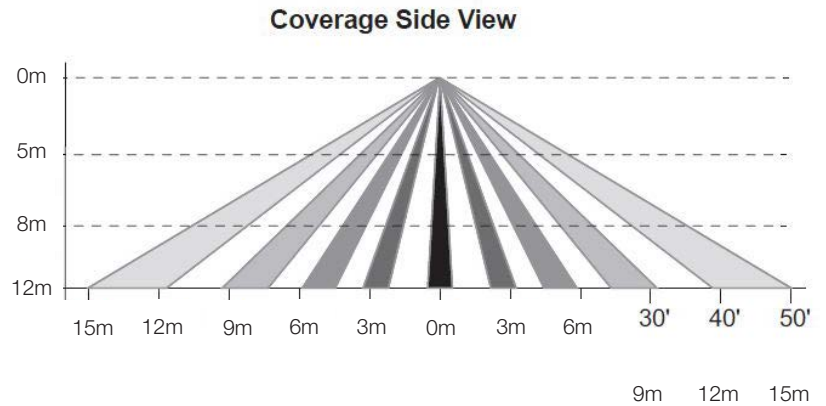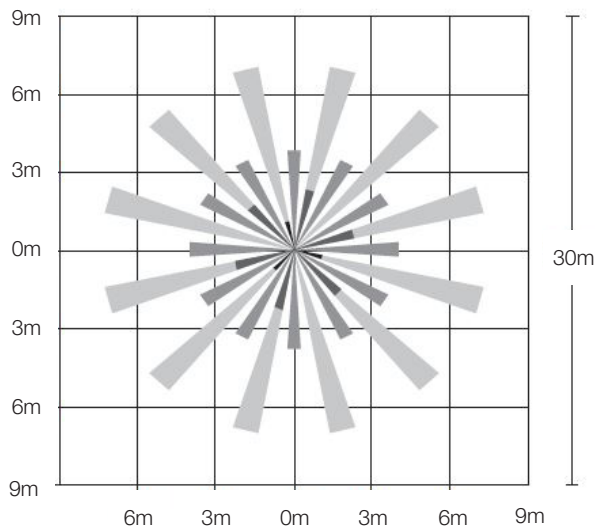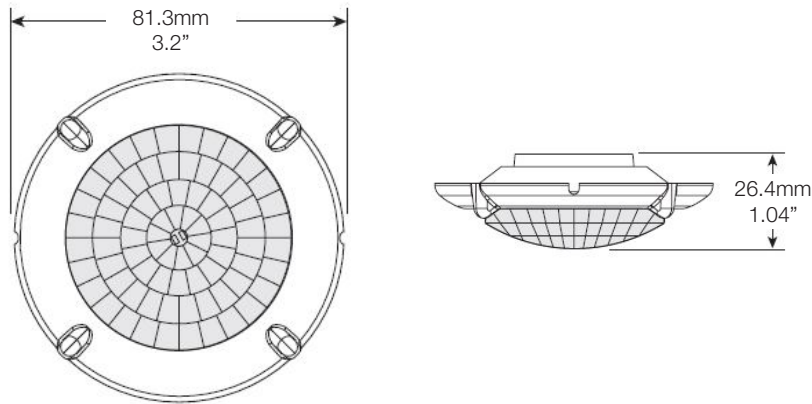


### 360° Coverage

The high density lens covers a 30m diameter area at a height of 12m.

## Ordering Information

Please reference page 5 for High Bay models with occupancy sensor (factory installed).

For add on kit, use part number **HBXOCC100277E**.



### HBXOCC100277E

- Field installable occupancy sensor for models prefixed with HWE or HCE

**North American HQ**

1501 Route 34 South  
Farmingdale, NJ 07727  
Tel: 732-919-3119  
Fax: 732-751-5778  
info@dialight.com

**EMEA Technical Centre**

Ejby Industrivej 91 B  
200 Glostrup  
Tel: +45 8877 4545 (Denmark)  
Tel: +44 1638 666541 (UK)  
Tel: +49 89 12089 5713 (Germany)  
Tel: +33 3 23 22 62 58 (France)  
sales-europe@dialight.com

**Houston**

16830 Barker Springs Rd  
Ste 407  
Houston, TX 77084  
Tel: 732-919-3119  
Fax: 281-492-1531  
info@dialight.com

**Middle East**

Level 42  
Emirates Towers (Office Tower)  
Sheikh Zayed Road  
Dubai, United Arab Emirates  
Fax: +971 (0) 4319 7686  
Tel: +971 (0) 4319 7686

**Australia**

38 O'Malley Street  
Osborne Park, WA 6017  
Tel: +61 (0) 8 9244 7600  
Fax: +61 (0) 8 9244 7601  
info@dialight.com.au

**Southeast Asia**

33 Ubi Avenue 3  
#07-72 Vertex (Tower A)  
Singapore 408868  
Tel: +65 6578 7157  
Fax: +65 6578 7150  
enquiry@dialight.com.sg

**Brazil**

Alameda Mercurio,  
225 – American Park Empresarial NR  
Indaiatuba – SP – 13347– 662  
Tel: +55 (19) 3113-4300  
Fax: +55 (19) 3113-4300  
brasil@dialight.com

All values and performance data contained herein are design or typical values when measured under laboratory conditions. Dialight products are intended for ultimate purchase by industrial users and for operation by persons trained and experienced in the use and maintenance of this equipment. While every precaution has been taken to ensure accuracy and completeness of the information in this document, this document does not form part of any contract with Dialight and Dialight does not assume any liability for damages resulting from the use of this information, including any information on third party websites linked to from this document. The information in this document is subject to change without notice. The products or software referenced in this document are subject to the applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing, Dialight does not warrant or represent that its products are fit for a particular purpose and accepts no responsibility for the installation or unauthorised use of its products.

Dialight reserves the right to make changes at any time in order to supply the best product possible.

The most current version of this document will always be available at: [www.dialight.com](http://www.dialight.com)



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

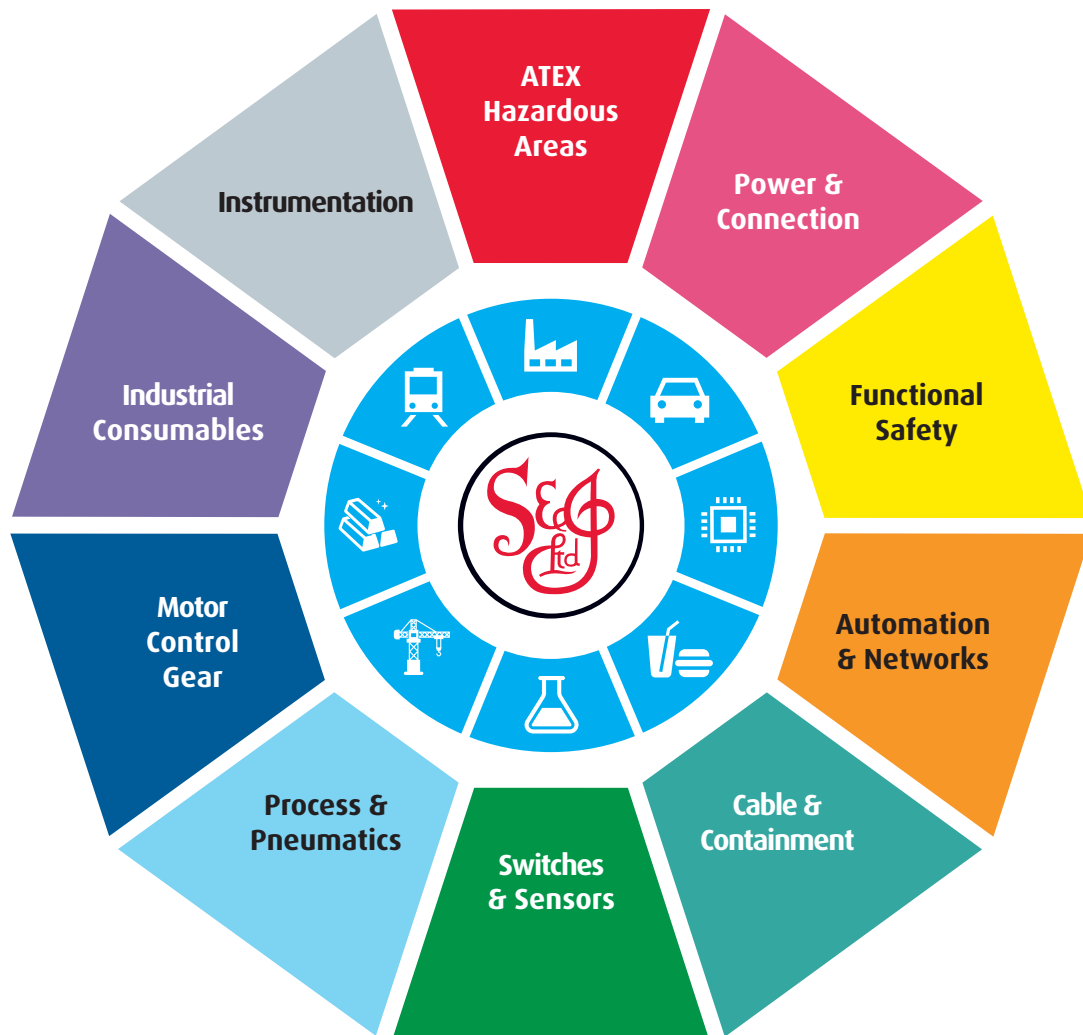

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**