

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Primary-switched power supply unit, QUINT POWER, Screw connection, DIN rail mounting, input: 1-phase, output: 24 V DC / 2.5 A

Commercial Data

Item number	2904614
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CMPI13
Product Key	CMPI13
GTIN	4055626255651
Weight per Piece (including packing)	360 g
Weight per Piece (excluding packing)	360 g
Customs tariff number	85044030
Country of origin	VN

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Technical Data

Input data

AC operation

Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	100 V AC ... 240 V AC -15 % ... +10 %
Electric strength, max.	300 V AC 30 s
Typical national grid voltage	120 V AC
	230 V AC
Voltage type of supply voltage	AC/DC
Inrush current	typ. 10 A (at 25 °C)
Inrush current integral (I^2t)	typ. 0.1 A ² s
Inrush current limitation	10 A
Frequency range (f_N)	50 Hz ... 60 Hz \pm 10 %
	16.7 Hz (acc. to EN 50163)
Mains buffering time	typ. 31 ms (120 V AC)
	typ. 31 ms (230 V AC)
Current consumption	0.85 A (100 V AC)
	0.7 A (120 V AC)
	0.39 A (230 V AC)
	0.37 A (240 V AC)
Protective circuit	Transient surge protection; Varistor
Typical response time	500 ms
Input fuse	4 A (slow-blow, internal)
Recommended breaker for input protection	6 A ... 16 A (Characteristic B, C, D, K or comparable)
Discharge current to PE	< 0.25 mA (264 V AC, 60 Hz)
	< 0.22 mA

DC operation

Input voltage range	110 V DC ... 250 V DC -20 % ... +40 %
Voltage type of supply voltage	AC/DC
Current consumption	0.75 A (110 V DC)
	0.33 A (250 V DC)

Output data

Efficiency	typ. 93 % (120 V AC)
	typ. 94 % (230 V AC)
Nominal output voltage	24 V DC
Setting range of the output voltage (U_{Set})	24 V DC ... 27 V DC (constant capacity)
Nominal output current (I_N)	2.5 A
Static Boost ($I_{Stat.Boost}$)	3.125 A (\leq 40 °C)
Dynamic Boost ($I_{Dyn.Boost}$)	4 A (\leq 60 °C (on \leq 5 s/off \geq 5 s))
Feedback voltage resistance	\leq 32 V DC

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Protection against overvoltage at the output (OVP)	$\leq 30 \text{ V DC} \pm 2 \%$
Control deviation	$< 0.5 \%$ (Static load change 10 % ... 90 %)
	$< 2 \%$ (Dynamic load change 10 % ... 90 %, (10 Hz))
	$< 0.25 \%$ (change in input voltage $\pm 10 \%$)
Residual ripple	$< 40 \text{ mV}_{PP}$ (with nominal values)
Short-circuit-proof	yes
No-load proof	yes
Output power	60 W
	75 W
	96 W
Maximum no-load power dissipation	$< 1 \text{ W}$ (120 V AC)
	$< 1 \text{ W}$ (230 V AC)
Power loss nominal load max.	$< 5 \text{ W}$ (120 V AC)
	$< 4 \text{ W}$ (230 V AC)
Crest factor	typ. 1.8 (120 V AC)
	typ. 1.84 (230 V AC)
Rise time	50 ms ($U_{Out} = 10 \% \dots 90 \%$)
Signal (configurable)	
Digital	0 V DC 24 V DC 30 mA
Default	24 V DC 30 mA 24 V DC for $U_{Out} > 0.9 \times U_{Set}$

Connection data

Input

Connection method	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	2.5 mm ²
Single conductor/terminal point, stranded, with ferrule, min.	0.25 mm ²
Single conductor/terminal point, stranded, with ferrule, max.	2.5 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	14
Stripping length	8 mm
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Output

Connection method	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	2.5 mm ²
Single conductor/terminal point, stranded, with ferrule, min.	0.25 mm ²

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Single conductor/terminal point, stranded, with ferrule, max.	2.5 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	14
Stripping length	8 mm
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Signal

Connection method	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	2.5 mm ²
Single conductor/terminal point, stranded, with ferrule, min.	0.25 mm ²
Single conductor/terminal point, stranded, with ferrule, max.	2.5 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	14
Stripping length	8 mm
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

LED signaling

Signal output

P_{Out}	$> P_{Thr}$ (LED lights up yellow, output power $> P_{Thr}$, depending on the rotary selector switch setting)
U_{Out}	$> 0.9 \times U_{Set}$ (LED lights up green)

Electrical properties

Number of phases	1.00
Insulation voltage input/output	4 kV AC (type test)
	3 kV AC (routine test)
Switching frequency	90 kHz ... 110 kHz (Auxiliary converter stage)
	50 kHz ... 195 kHz (Main converter stage)
	60 kHz ... 360 kHz (PFC stage)

Product properties

Product type	Power supply
MTBF (IEC 61709, SN 29500)	> 2000000 h (25 °C)
	> 1161000 h (40 °C)
	> 514000 h (60 °C)
Environmental protection directive	RoHS Directive 2011/65/EU
	WEEE
	Reach

Insulation characteristics

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Protection class	II
Degree of pollution	2

Life expectancy (electrolytic capacitors)

Current	2.5 A
Temperature	40 °C
Time	323000 h
Additional text	120 V AC

Life expectancy (electrolytic capacitors)

Current	2.5 A
Temperature	40 °C
Time	346000 h
Additional text	230 V AC

Life expectancy (electrolytic capacitors)

Current	2.5 A
Temperature	25 °C
Time	915000 h
Additional text	120 V AC

Life expectancy (electrolytic capacitors)

Current	2.5 A
Temperature	25 °C
Time	980000 h
Additional text	230 V AC

Dimensions

Width	40 mm
Height	99 mm
Depth	114 mm

Installation dimensions

Installation distance right/left (active)	15 mm / 15 mm ($P_{Out} \geq 50\%$)
Installation distance right/left (passive)	5 mm / 5 mm ($P_{Out} \geq 50\%$)
Installation distance right/left (active, passive)	0 mm / 0 mm ($P_{Out} \leq 50\%$)
Installation distance top/bottom (active)	30 mm / 30 mm ($P_{Out} \geq 50\%$)
Installation distance top/bottom (passive)	30 mm / 30 mm ($P_{Out} \geq 50\%$)
Installation distance top/bottom (active, passive)	30 mm / 30 mm ($P_{Out} \leq 50\%$)

Mounting

Mounting type	DIN rail mounting
With protective coating	No

Material specifications

Inflammability class in acc. with UL 94 (housing / terminal blocks)	V0
Housing material	Plastic

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Type of housing	Polycarbonate
Hood version	Polycarbonate

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (start-up type tested)	-40 °C
Maximum altitude	≤ 5000 m (> 2000 m, observe derating)
Climatic class	3K3 (in acc. with EN 60721)
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Shock	18 ms, 30g, in each space direction (according to IEC 60068-2-27)
Vibration (operation)	5 Hz ... 100 Hz resonance search 2.3g, 90 min., resonance frequency 2.3g, 90 min. (according to DNV GL Class C)

Standards and regulations

Rail applications	EN 50121-3-2
	EN 50121-4
	EN 50121-5
	IEC 62236-3-2
	IEC 62236-4
	IEC 62236-5
Standard – Limitation of mains harmonic currents	EN 61000-3-2
Standard – Safety extra-low voltage	IEC 61010-1 (SELV)
	IEC 61010-2-201 (PELV)
Standard - Safe isolation	IEC 61558-2-16
	IEC 61010-2-201
Standard - safety for equipment for measurement, control, and laboratory use	IEC 61010-1
	IEC 61010-2-201 (SELV)
Standard - Safety of transformers	EN 61558-2-16

Overvoltage category

EN 61010-1	II (≤ 5000 m)
EN 62477-1	III (≤ 2000 m)

Approval data

ATEX

Identification	UL 21 ATEX 2597 X
	□ II 3 G Ex ec nC IIC T4 Gc

ATEX

Identification	IECEx ULD 21.0023X
	Ex ec nC IIC T4 Gc

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

ATEX

Identification	UL21UKEX2208X
----------------	---------------

ATEX

Identification	UL Listed UL 61010-1
----------------	----------------------

ATEX

Identification	UL Listed UL 61010-2-201
----------------	--------------------------

ATEX

Identification	UL 1310 Class 2 Power Units
----------------	-----------------------------

ATEX

Identification	ANSI/UL 121201 Class I, Division 2, Groups A, B, C, D (Hazardous Location)
----------------	--

ATEX

Identification	CB scheme (IEC 61010-1, IEC 61010-2-201)
----------------	--

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
EMC requirements, power plant	IEC 61850-3
	EN 61000-6-5
Conducted noise emission	EN 55016
	EN 61000-6-3 (Class B)
Interference emission	Noise emission according to EN 61000-6-3 (residential and commercial) and EN 61000-6-4 (industrial)
Noise emission	Additional basic standard EN 61000-6-5 (immunity in power station), IEC/EN 61850-3 (energy supply)
Noise emission	EN 55016
	EN 61000-6-3 (Class B)
Noise immunity	Immunity according to EN 61000-6-1 (residential), EN 61000-6-2 (industrial), and EN 61000-6-5 (power station equipment zone), IEC/EN 61850-3 (energy supply)

Harmonic currents

Standards/regulations	EN 61000-3-2
	EN 61000-3-2 (Class A)
Frequency range	0 kHz ... 2 kHz

Flicker

Standards/regulations	EN 61000-3-3
Frequency range	0 kHz ... 2 kHz

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	8 kV (Test Level 4)
-------------------	---------------------

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Discharge in air	15 kV (Test Level 4)
Comments	Criterion A

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 1 GHz
Test field strength	20 V/m (Test Level X)
Frequency range	1 GHz ... 6 GHz
Test field strength	10 V/m (Test Level 3)
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	4 kV (Test Level 4 - asymmetrical)
Output	4 kV (Test Level X - asymmetrical)
Signal	4 kV (Test Level X - asymmetrical)
Comments	Criterion A

Surge voltage load (surge)

Standards/regulations	EN 61000-4-5
Input	2 kV (Test Level 4 - symmetrical)
	4 kV (Test Level 4 - asymmetrical)
Output	1 kV (Test Level 3 - symmetrical)
	2 kV (Test Level 3 - asymmetrical)
Comments	Criterion A

Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

Conducted interference

I/O/S	asymmetrical
Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V (Test Level 3)

Power frequency magnetic field

Standards/regulations	EN 61000-4-8
Frequency	16.67 Hz
	50 Hz
	60 Hz
Test field strength	100 A/m
Additional text	60 s
Comments	Criterion A
Frequency	50 Hz

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

	60 Hz
Frequency range	50 Hz ... 60 Hz
Test field strength	1 kA/m
Additional text	3 s
Frequency	0 Hz
Test field strength	300 A/m
Additional text	DC, 60 s

Voltage dips

Standards/regulations	EN 61000-4-11
Voltage	100 V AC
Frequency	60 Hz
Voltage dip	70 %
Number of periods	0.5 / 1 / 30 periods
Additional text	Test Level 2
Comments	Criterion A
Voltage dip	40 %
Number of periods	5 / 10 / 50 periods
Additional text	Test Level 2
Comments	Criterion B
Voltage dip	0 %
Number of periods	0.5 / 1 / 5 / 50 periods
Additional text	Test Level 2
Comments	Criterion B

Pulse-shape magnetic field

Standards/regulations	EN 61000-4-9
Test field strength	1000 A/m
Comments	Criterion A

Attenuated sinusoidal oscillations (ring wave)

Standards/regulations	EN 61000-4-12
Input	2 kV (symmetrical) 4 kV (asymmetrical)
Comments	Criterion A

Asymmetrical conducted disturbance variables

Standards/regulations	EN 61000-4-16
Test level 1	16.67 Hz 50 Hz 60 Hz 150 Hz 180 Hz (Test Level 3)
Voltage	30 V (10 s)
Test level 2	16.67 Hz 50 Hz 60 Hz (Test Level 2)
Voltage	300 V (1 s)
Comments	Criterion A

Attenuated oscillating wave

Standards/regulations	EN 61000-4-18
-----------------------	---------------

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Voltage	1 kV (symmetrical)
	2.5 kV (asymmetrical)
	1 kV (symmetrical)
Comments	Criterion A
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.
Criterion C	Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements.

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC




2904614


<https://www.phoenixcontact.com/gb/products/2904614>

Drawings

Diagram

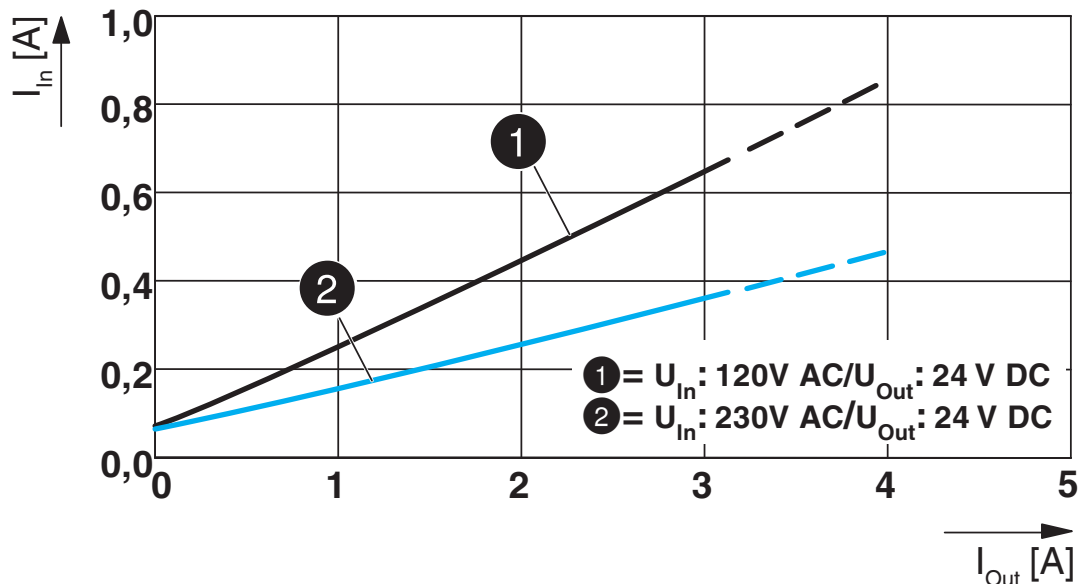

Block diagram

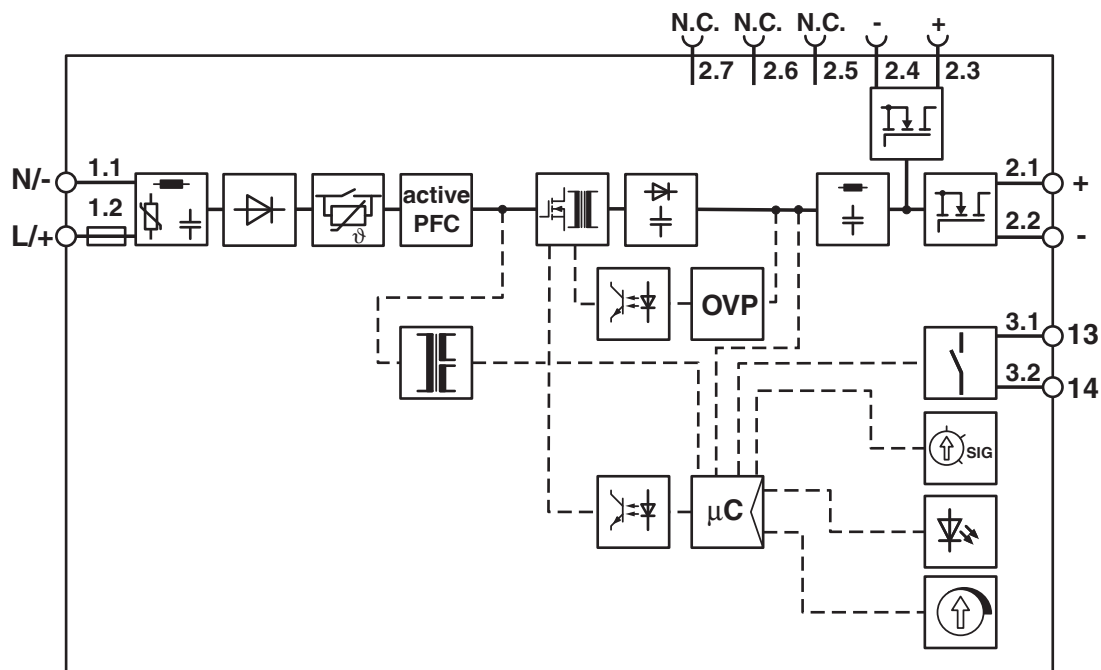


Power supply unit - QUINT4-SYS-PS/1AC/24DC/2. 5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Diagram

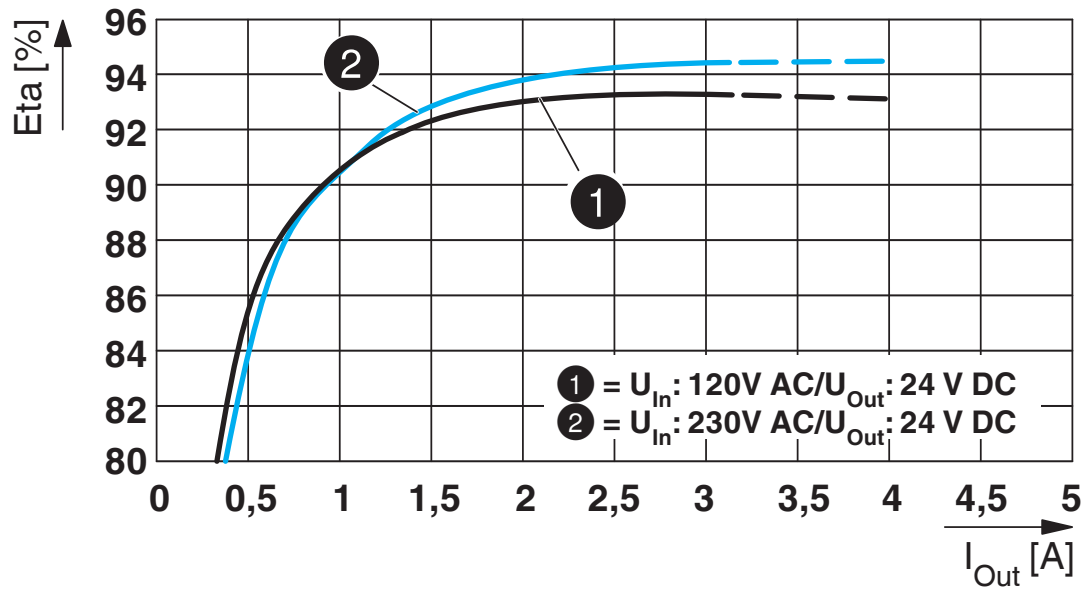

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2. 5/SC




2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Schematic diagram


Housing

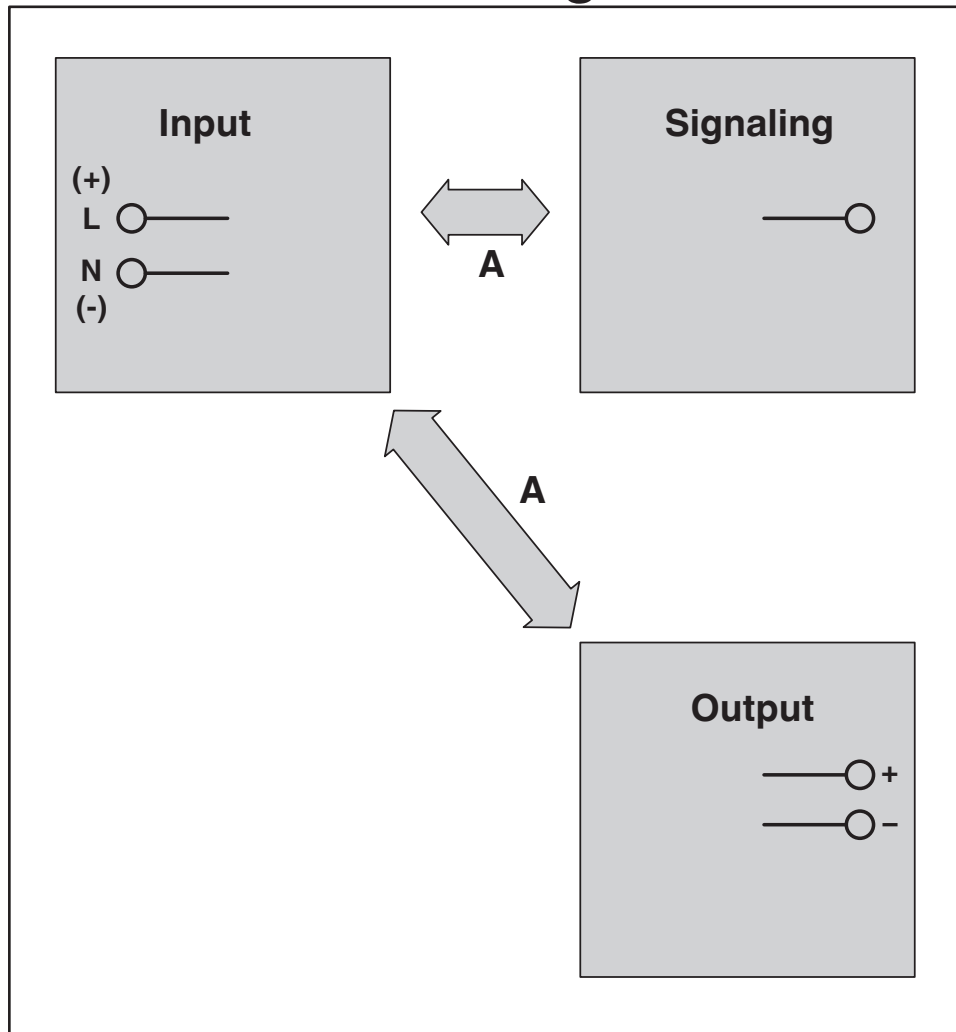

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2. 5/SC



2904614
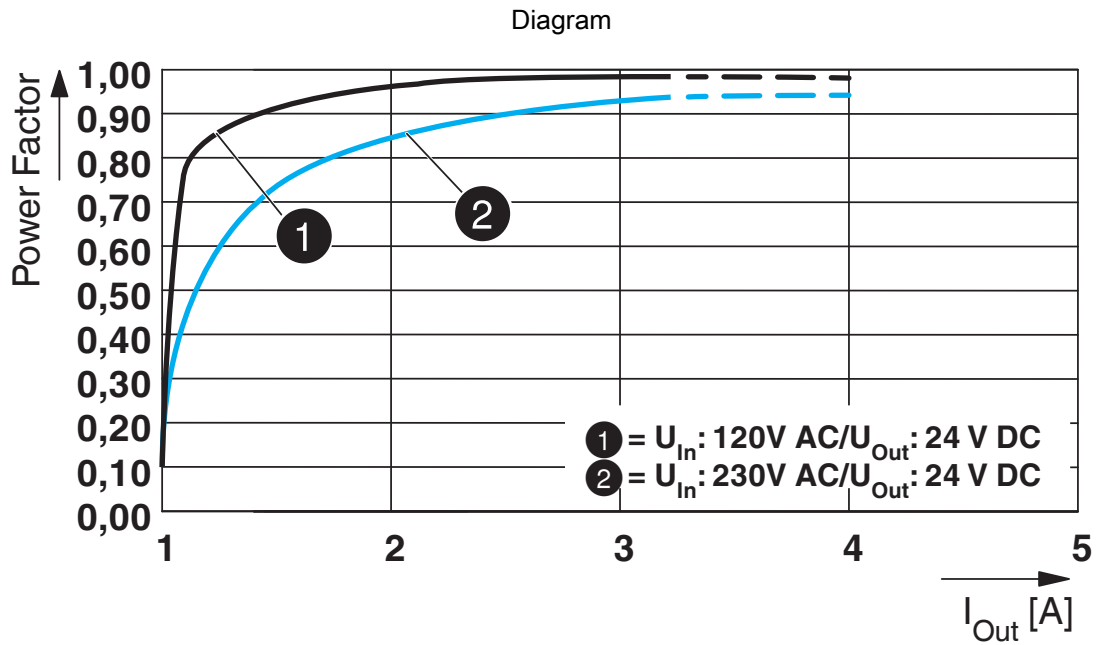
<https://www.phoenixcontact.com/gb/products/2904614>

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Approvals

**IECEE CB Scheme**

Approval ID: DK-116799-A1-UL

**cULus Listed**

Approval ID: FILE E 123528

DNV

Approval ID: TAA0000BV

**IECEx**

Approval ID: ULD 21.0023X

**ATEX**

Approval ID: UL 21 ATEX 2597X

**cULus Listed**

Approval ID: FILE E 199827

**UKCA-EX**

Approval ID: UL21UKEX2208X

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Classifications

ECLASS

ECLASS-9.0	27040701
ECLASS-10.0.1	27040701
ECLASS-11.0	27040701

ETIM

ETIM 8.0	EC002540
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

Power supply unit - QUINT4-SYS-PS/1AC/24DC/2.5/SC



2904614

<https://www.phoenixcontact.com/gb/products/2904614>

Environmental Product Compliance

REACH SVHC

Lead 7439-92-1

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

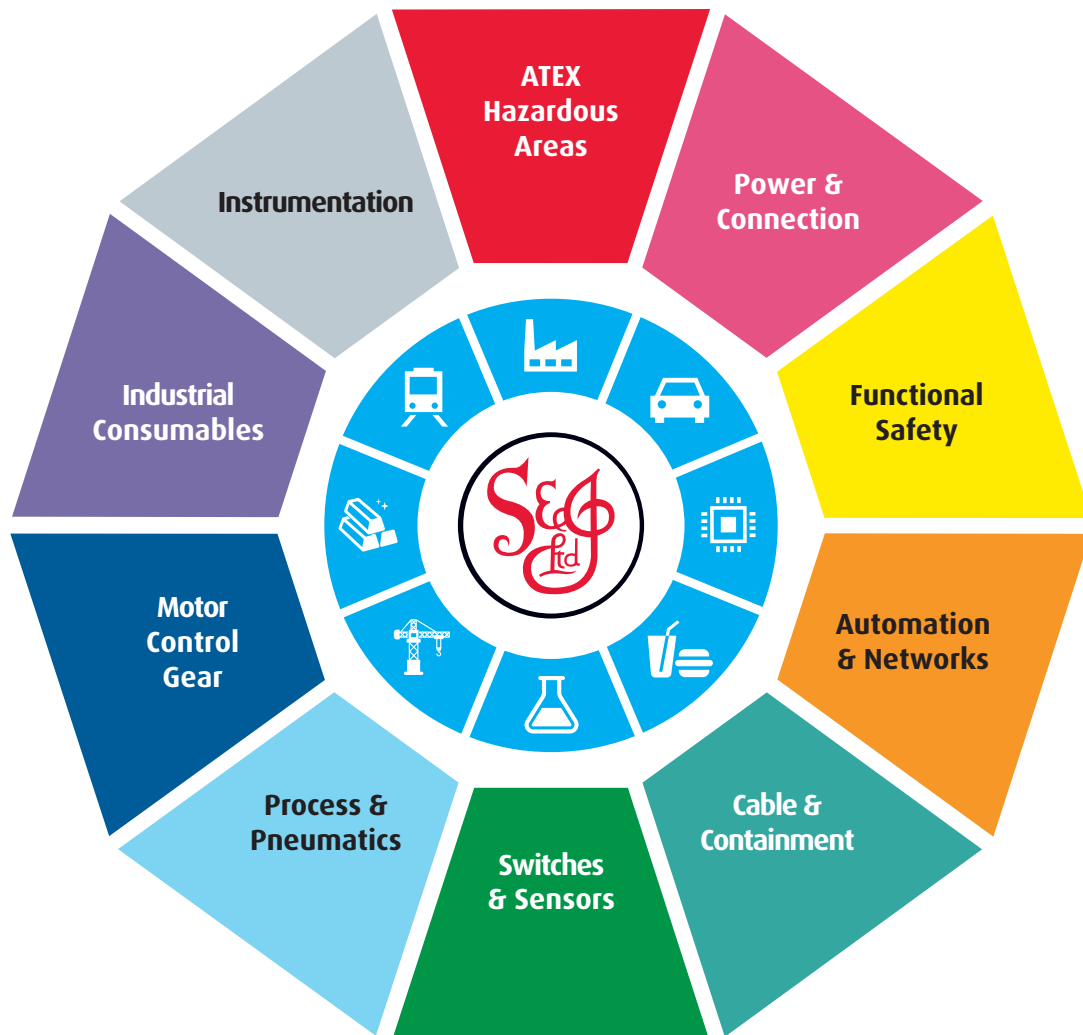

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk