

Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



HEAVYCON QUICKON sleeve housing A3, for single locking latch, 3-pos., with PE connection, socket, QUICKON connection, straight cable outlet

Commercial Data

Item number	1641510
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF7AJX
Product Key	BF7AJX
Catalog Page	Page 505 (C-2-2019)
GTIN	4017918889920
Weight per Piece (including packing)	31.33 g
Weight per Piece (excluding packing)	31 g
Customs tariff number	85366990
Country of origin	PL

Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Technical Data

Product properties

Type	D7
Product type	Contact insert with a fixed no. of positions
Number of positions	3
Connection profile	3+PE
Application	Standard
No. of cable outlets	1
Type	Socket
Housing type	Complete housing
Locking type	for single locking latch
Series	HC-A
Shielded	no
Cable outlet	straight
Pg screw connection	with

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection technology	QUICKON connection
-----------------------	--------------------

Conductor connection

Connection cross section AWG	18 ... 16
------------------------------	-----------

Dimensions

Dimensional drawing	
Width	34 mm
Height	66 mm
Length	26.5 mm

Electrical properties

Rated voltage (III/3)	230 V (Conductor-PE)
Rated surge voltage (II/2)	4 kV

Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Rated surge voltage (III/2)	4 kV
Rated surge voltage (III/3)	4 kV
Rated surge voltage	4 kV
Rated current	10 A
rated voltage (II/2)	1000 V
rated voltage (III/2)	630 V
Rated voltage (III/3)	230/400 V
	230 V (Conductor-PE)
	400 V (Conductor-Conductor)

Mechanical properties

Mechanical data

Locking type	Pin
--------------	-----

Material specifications

Flammability rating according to UL 94	V0
Insulating material	PA
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PA / PC
Housing material	PA

Connector

Insertion/withdrawal cycles	>= 500
-----------------------------	--------

Cable / line

Cable structure

External cable diameter	6 mm ... 12 mm
Wire insulation material	PVC / PE
Wire diameter including insulation	1.8 mm ... 3 mm

Mounting

Mounting type	This product is only intended for use outdoors.
Assembly instructions	This product is only intended for use outdoors.
	If the conductor is reconnected, it must be cut off above the last contact point. QUICKON components may only be operated when under no load.

Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-25 °C ... 80 °C
Temperature when conductor connected	-5 °C ... 50 °C (specifications of the cable manufacturer must also be observed)
Ambient temperature (storage/transport)	-25 °C ... 80 °C


Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Drawings

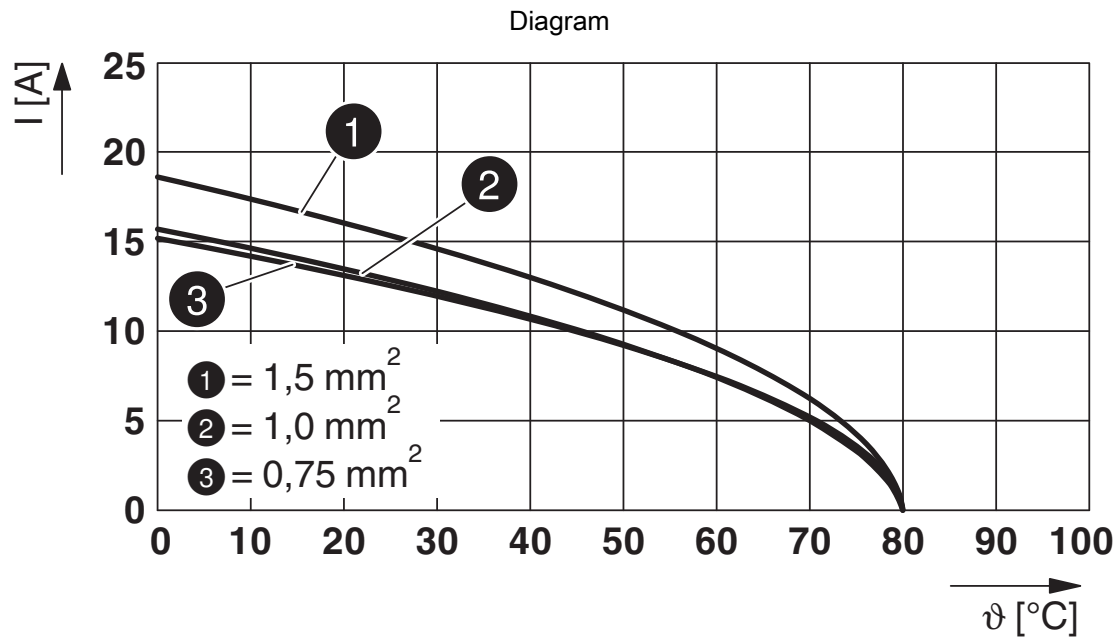

Derating diagram


Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Dimensional drawing

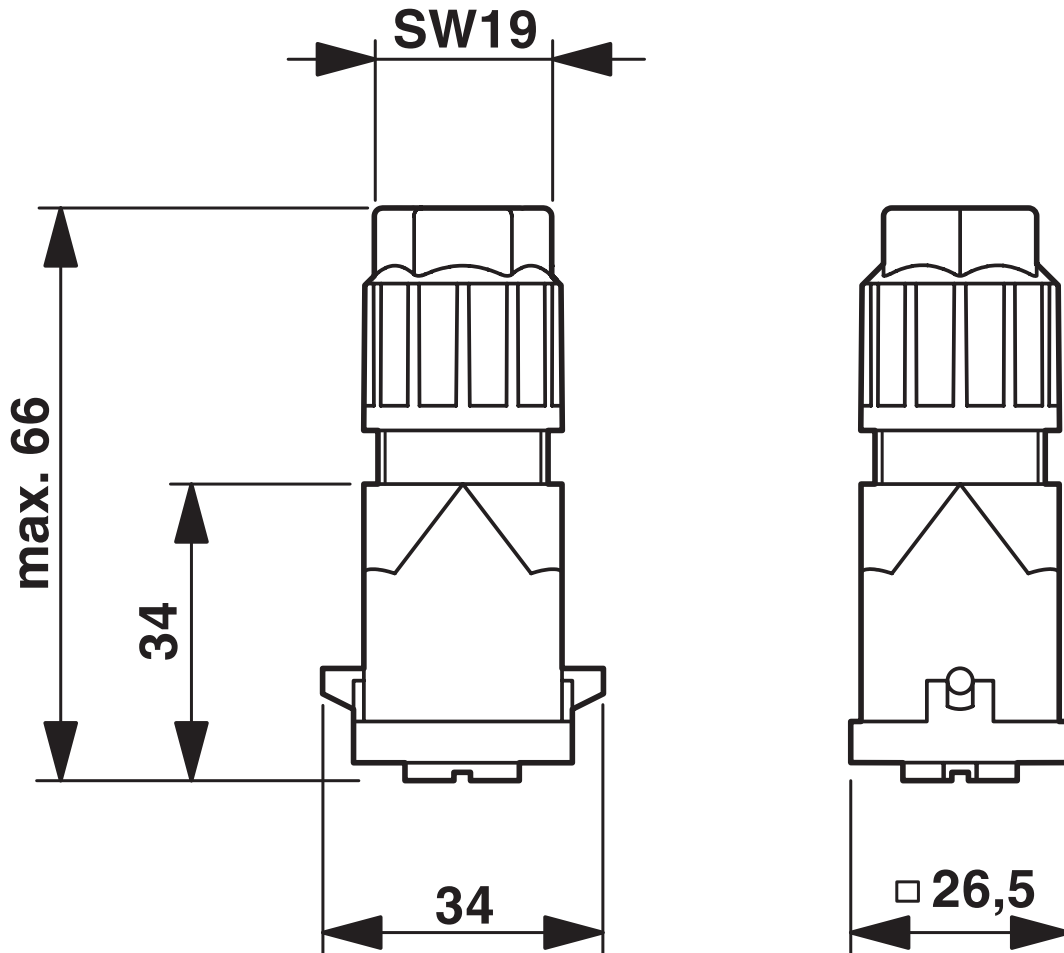

Dimensional drawing

Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Approvals

DNV

Approval ID: TAE000037S

**cUL Recognized**

Approval ID: FILE E 118976

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	10 A	18 - 16	-

**UL Recognized**

Approval ID: FILE E 118976

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	10 A	18 - 16	-

**EAC**

Approval ID: RU C-DE.AI30.B.01102

cULus Recognized

Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Classifications

ECLASS

ECLASS-9.0	27440101
ECLASS-10.0.1	27440101
ECLASS-11.0	27440101
ECLASS-12.0	27440113

ETIM

ETIM 8.0	EC002636
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Connector - HC-A3-BUQ1,5-TFL-G-PA



1641510

<https://www.phoenixcontact.com/gb/products/1641510>

Environmental Product Compliance

China RoHS

Environmentally friendly use period: unlimited = EFUP-e

No hazardous substances above threshold values

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

info@phoenixcontact.co.uk

