




MADE IN BRITAIN



476

Adaptors and Reducers

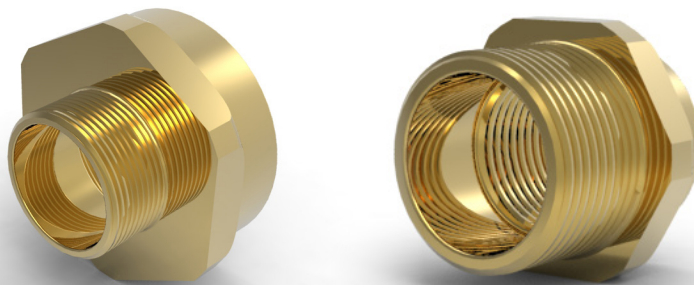

Metallic Adaptor and Reducer Range; designed to increase or reduce entry thread sizes when mounted to an enclosure. Suitable for use in Flameproof and Increased Safety protection concepts along with mining applications

Technical Data

Ingress Protection	IP66*
Operating Temperature	-60°C to +200°C**
Construction Materials	Manufactured in Brass (Standard), Nickel Plated Brass or 316L Stainless Steel
Threadform	M16 to M130** 3/8" NPT to 6" NPT
*In order to maintain IP rating at the joints a suitable sealing method must be used.	
**With No IP Seal fitted	
**For M16-M75: Metric Thread Length 15mm as standard; Metric Thread Pitch 1.5mm as standard For M80-M130: Metric Thread Length 20mm as standard; Metric Thread Pitch 2mm as standard	

Approvals

Applications	Suitable for Use in Zone 1, Zone 21, Zone 2, Zone 22 and mining applications
Protection Class	Ex II 2GD Ex db eb IIC Gb; Ex tb IIIC Db Ex I M2 Ex db eb I Mb
Construction & Test Standards	IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7 and IEC/EN 60079-31
ATEX Certificate No	Baseefa 11ATEX0067X
UKEx Certificate No	BAS21UKEX0057X
IECEx Certificate Number	IECEx BAS11.0037X
Marine Approvals	ABS: 17-LD1653734-PDA BV: 43523/B0
Additional Certifications	CCC: 2020312313000308 EN EAC: No EA3C RU C-GB.HA91.B.00265/21 EQM: 20-11-27224/Q20-11-000979/NB0007 Inmetro: IEx 15.0193X SONCAP: LCOGB049552-0500

NEC/CEC

NEC Protection Class	CI ABCD CII EFG CIII: CI Zn1 AEx d e IIC Gb; Zn 21 AEx tb IIIC Db
CEC Protection Class	Ex db eb IIC Gb; Zn 21 Ex tb IIIC Db
c CSA us Certificate	1731876
Construction & Test Standards	CSA C22.2 No. 25-1966, 30-M1986, 45-M1981, 94-M91, 18.3.-12 CSA/UL 60079-0, CSA/UL 60079-1, CSA/UL 60079-7, CSA/UL 60079-31, UL514B

Ordering Information

Product	Male Thread Size	Female Thread Size	Material	Finish
476	M40	M32	Brass	NP

476 Allowable Thread Combinations																			
KEY: A = Adaptor R = Reducer	Female Thread																	Metric	
	M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	M110	M115	M120	M130	5"	6"	NPT	
Male Thread	M16	3/8"	A	A	A														
	M20	1/2"	R	A	A	A													
	M25	3/4"	R	R	A	A	A												
	M32	1"	R	R	R	A	A	A											
	M40	1 1/4"	R	R	R	R	A	A	A										
	M50	1 1/2"	R	R	R	R	R	A	A	A									
	M63	2"	R	R	R	R	R	R	A	A	A								
	M75	2 1/2"	R	R	R	R	R	R	R	A	A	A							
	M80		R	R	R	R	R	R	R	R	A	A	A						
	M90	3"	R	R	R	R	R	R	R	R	R	A	A	A					
	M100	3 1/2"	R	R	R	R	R	R	R	R	R	R	A	A	A				
	M110		R	R	R	R	R	R	R	R	R	R	R	A	A	A			
	M115	4"	R	R	R	R	R	R	R	R	R	R	R	R	A	A	A		
	M120		R	R	R	R	R	R	R	R	R	R	R	R	R	A	A		
	M130		R	R	R	R	R	R	R	R	R	R	R	R	R	R	A		
		5"	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	A	
		6"	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	A
Metric	NPT																		



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk