

# Brake chopper, 24 V



## Brake chopper for 24 V motorized rollers

tolerated overvoltage up to 35 V



(figure similar)

Figure	Type	Flat design, montage in cable duct possible <sup>(1)</sup>	Internal fuse	Profile cable connection	Connection <sup>(2)</sup>	Round cable <sup>(3)</sup>	Special function	Protection category	Article no.
	Brake chopper	yes, 19 mm deep	thermal fuse (overheating protection through clocking)	1 x AUX	–	–	Brake chopper for 24 V motorized rollers	IP67	<b>BWU4915</b>

**(1) Flat design, installation in cable duct possible**

Modules with a flat housing design and with cables which exit the sides make these ideal for installation in cable ducts, cable channels, cable troughs, cable rails or cable trays. Please note the respective housing depth for your particular installation.

**(2) Connection:** further connection options are available on request.


**(3) Cable:** other cable lengths are available on request.

Article No.	BWU4915
<b>Connection</b>	
Profile cable connection	1 x AUX profile cable and piercing technology
Connection	–
Round cable	–
<b>Brake Chopper</b>	
Max. Power	122,5 W at 35 V peak power (load resistor 10 Ω) The exact power depends on the voltage <sup>(1)</sup>
Nominal switch-on threshold	27 V <sup>(2)</sup>
Operating voltage	24 V <sub>DC</sub> (10 ... 26,4 V <sub>DC</sub> ) PELV
Max. tolerated overvoltage due to retroaction (AUX)	35 V
Operating current	20 mA <sup>(1)</sup>
Internal fuse	thermal fuse (overheating protection through clocking) <sup>(3)</sup>
<b>Visualization</b>	
LED AUX (green)	on: AUX voltage on profile cable O.K.
LED CHOPPER (yellow)	on: brake chopper active
<b>Environment</b>	
Applied standards	EN 60529 EN 61000-6-2 EN 61000-6-3
Operating altitude	max. 2000 m
Ambient temperature	-30 °C ... +55 °C <sup>(4)</sup>
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for screw mounting, suitable for cable ducts (depth ≥19 mm)
Pollution Degree	2
Protection category	IP67
Maximum tolerable shock and vibration stress	≤15g, T≤11 ms 10 ... 55 Hz, 0,5 mm Amplitude
Insulation voltage	≥500 V
Weight	58 g
Dimensions (W / H / D) in mm	60 / 45 / 19

# Brake chopper, 24 V





(1) The maximum convertible braking energy can be increased by connecting further BWU4915s in parallel.

	<b>Note</b>
	The nominal voltage in regular continuous operation must be below the switch-on threshold.

(3) Duty cycle approx. 2 %, period duration approx. 0.5 s

(4) Down to -25 °C with flexibly mounted cable, -30 °C only with fixed mounted cable.

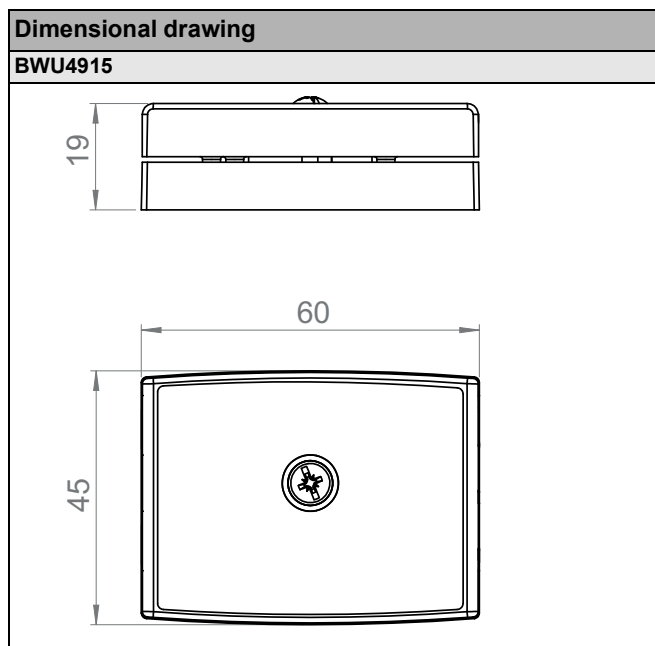

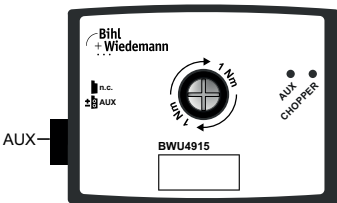Connections		
Article No.	connection	
<b>BWU4915</b>	<b>AUX</b>	

**Accessories:**

- Sealing profile IP67 (IDC plug), 60 mm (article no. BW3282)
- ASi profile cable (black) for additional auxiliary power, wire section 1,5 mm<sup>2</sup> (art. no. BW1980, BW2757)
- ASi profile cable (black) for additional auxiliary power, wire section 2,5 mm<sup>2</sup> (art. no. BW3169)



# SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

# [www.scatts.co.uk](http://www.scatts.co.uk)