




Product designation	Pushbutton actuator, spring return		
Product type designation	LPSB10		
General characteristics			
Colour	Black		
Type of positions	Flush		
Material	Aluminium and zinc alloy		
IEC degree of protection	IP66, IP67 and IP69K		
Mechanical features			
Operating force	kg-lb	<0.5Kg / 1.1lb	
Mechanical life - spring return actuators	cycles	5000000	
Fixing	Without mounting adapter		
Mounting adapter	LPXAU120M		
UL technical data			
UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K		
Ambient conditions			
Temperature	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85
Dimensions			
			
Certifications and compliance			
Compliance	CSA C22.2 n° 14		
	IEC/EN/BS 60947-1		
	IEC/EN/BS 60947-5-1		
	UL508		
Certificates	cULus		
ETIM classification			
ETIM 8.0	EC000221 - Front element for push button		



LPSB102
PUSHBUTTON ACTUATOR, SPRING RETURN Ø22MM PLATINUM SERIES METAL, FLUSH,
BLACK



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

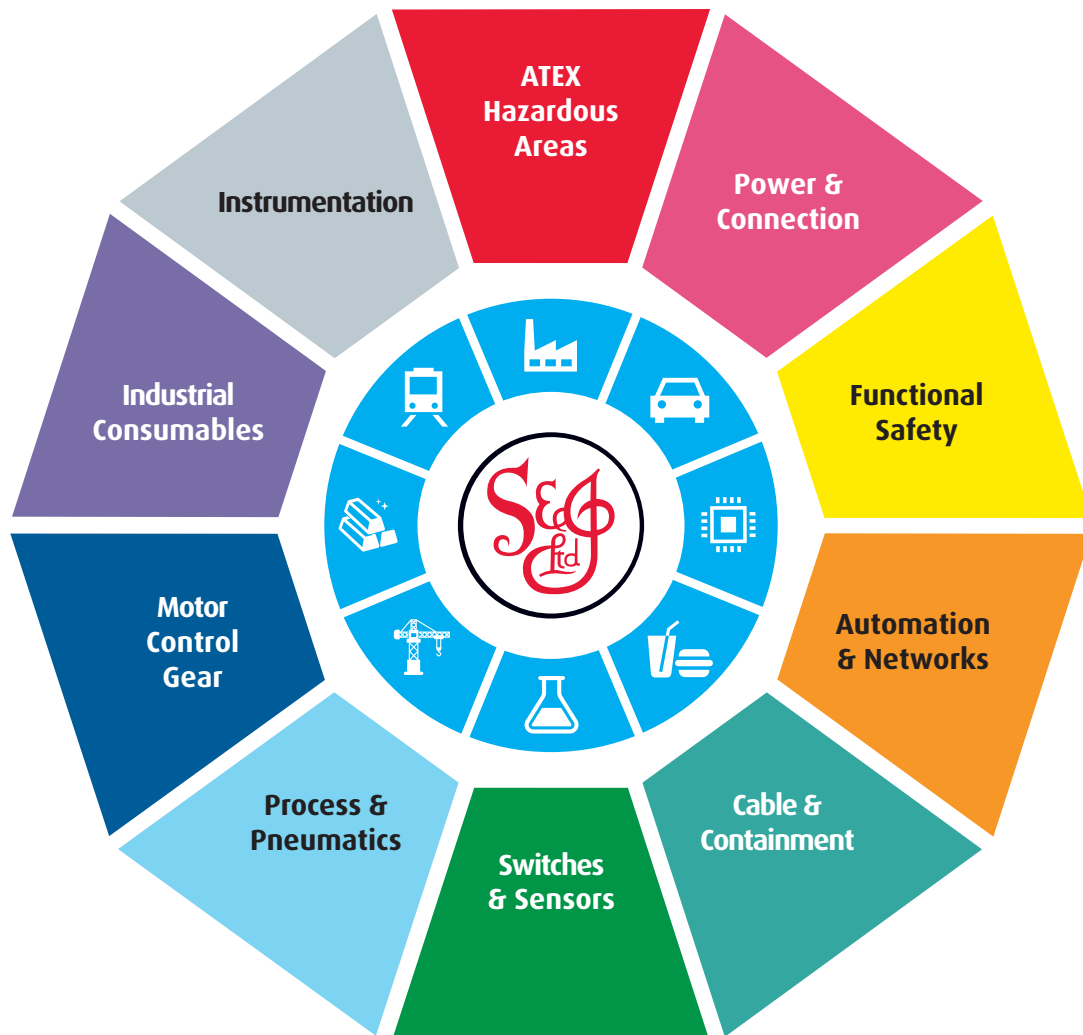

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk