



# eX710M - Tech Note

## 10" TFT, PCAP Touchscreen, 3x Ethernet Ports, JMobile runtime

- 10.1" TFT color display, resolution 1280x800 pixel
- Projected capacitive touchscreen. True glass design.
- Multitouch operation
- 64 bit quad core CPU
- Operating Temperature -20°C to +60°C
- IECEX, ATEX, DNV-GL, cULus, cULus: Class 1 Div 2



## Highlights

eX700M Series feature a powerful 64 bit quad core CPU that ensures JMobile applications are running in their optimal environment for the highest performance.

The power of eX700M Series is the best way to exploit the new graphical and security features in JMobile 4.5, in addition to the outstanding communication features such as OPC UA Client/Server and MQTT.




The glass projected capacitive touchscreen and the brilliant 7 inch widescreen display guarantee great optical performance; with the support of multitouch gesture programming they can create the most natural human interfaces.

eX700M Series is the ideal choice for the most demanding IIoT edge applications in factory, marine and building automation where powerful and performing HMI is needed for installation as close as possible to human operators.

# eX710M - Technical Data



| System Resources             |  |
|------------------------------|--|
| Display - Colors             | 10.1" TFT 16:9 LED - 16M   |
| Resolution                   | 1280x800 WXGA  |
| Brightness                   | 500 cd/m2  |
| Dimming                      | Yes  |
| Touchscreen                  | True Glass Projected Capacitive, Multitouch  |
| CPU                          | 64-bit RISC quad core - 1.6 GHz  |
| Operating System             | Linux  |
| Flash                        | 8 GB   |
| RAM                          | 2 GB   |
| FRAM                         | 64 KB  |
| RTClock, RTCBack-up, Buzzer  | Yes  |
| Interface                    |  |
| Ethernet port                | 3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)   |
| USB port                     | 2 (Host V2.0, max. 500 mA)   |
| Serial port                  | 1 (RS-232, RS-485, RS-422, software configurable). Max 3 serial ports using plug-in modules.                     |
| SD card                      | Yes  |
| Expansion                    | 2 slot for plug in modules   |
| Ratings                      |  |
| Power supply                 | 24 Vdc (10 to 32 Vdc)  |
| Current Consumption          | 1.0 A at 24 Vdc (max.)   |
| Input Protection             | Electronic   |
| Battery                      | Rechargeable Lithium battery, not user-replaceable   |
| Environment Conditions       |  |
| Operating Temperature        | -20° to +60 °C (vertical installation). Plug-in and USB devices may limit max temperature to +50 °C              |
| Storage Temperature          | -20°C to +70°C   |
| Operating / Storage Humidity | 5-85% RH, non condensing   |
| Protection Class             | IP66 (front), IP20 (rear) - Type: 12, 4X   |
| Dimensions and Weights       |  |
| Faceplate LxH                | 282x197 mm (11.10x7.80")   |
| Cutout AxB                   | 271x186 mm (10.67x7.32")   |
| Depth D+T                    | 56+8 mm (2.20+0.31")   |
| Weight                       | 2.5 Kg   |
| Approvals                    |  |
| CE                           | Electromagnetic Compatibility Directive 2014/30/EU (EMC)   |
| ATEX                         | Zone 2/22: II 3 G Ex ec IIC T5...T4 Gc, II 3 D Ex tc IIIC T95°C Dc<br>-20°C ≤ Tamb ≤ +60°C or 0°C ≤ Tamb ≤ +50°C |
| IECEX                        | Zone 2/22: Ex ec IIC T5...T4 Gc, Ex tc IIIC T95°C Dc<br>-20°C ≤ Tamb ≤ +60°C or 0°C ≤ Tamb ≤ +50°C               |
| UL                           | cULus: UL61010-1 / UL61010-2-201   |
| UL                           | cULus: Class 1 Div 2   |
| DNV                          | Yes  |
| RCM                          | Yes  |

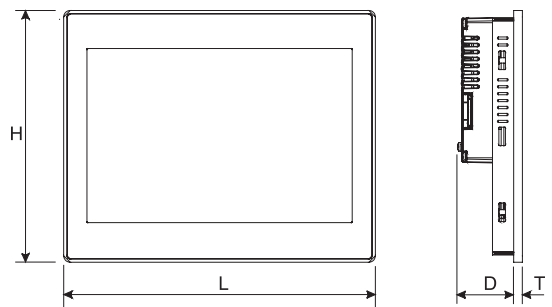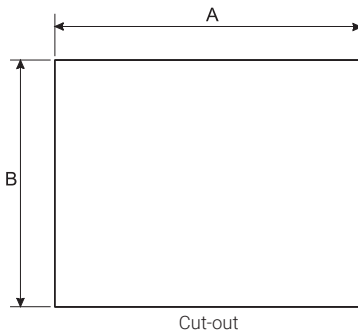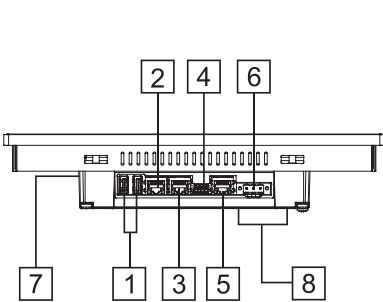

- 1 USB ports 1 and 2
- 2 Ethernet port 2 (10/100 Mb)
- 3 Ethernet port 1 (10/100 Mb)
- 4 Serial port
- 5 Ethernet port 0 (10/100/1000 Mb)
- 6 Power supply
- 7 SD Card slot
- 8 2 Expansion slots for plugin modules

## Ordering Information

| Model  | Part Number | Description  |
|--------|-------------|--|
| eX710M | +EX710MU5P1 | HMI 10" TFT 1280x800, PCAP Touch, 3x Ethernet, JMobile runtime |



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**