



Pushing Performance  
Since 1945

## Han 6ES Press HMC-M

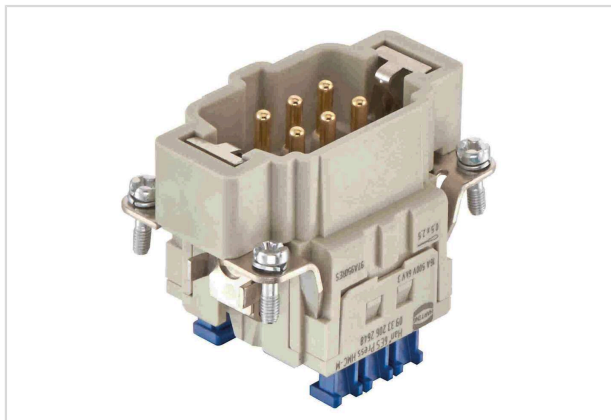


Image is for illustration purposes only. Please refer to product description.

|                    |   |
|--------------------|---|
| Part number        | 09 33 206 2648  |
| Specification      | Han 6ES Press HMC-M   |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09332062648">https://b2b.harting.com/09332062648</a> |

### Identification

|          |                               |
|----------|-------------------------------|
| Category | Inserts                       |
| Series   | Han <sup>®</sup> ES Press HMC |

### Version

|                    |   |
|--------------------|---|
| Termination method | Cage-clamp termination                                  |
| Gender             | Male  |
| Size               | 6 B   |
| Number of contacts | 6   |
| PE contact         | Yes   |
| Details            | for hoods/housings high construction only<br>Blue slide |

### Technical characteristics

|                         |                              |
|-------------------------|------------------------------|
| Conductor cross-section | 0.14 ... 2.5 mm <sup>2</sup> |
| Conductor cross-section | AWG 26 ... AWG 14            |
| Rated current           | 16 A                         |
| Rated voltage           | 500 V                        |
| Rated impulse voltage   | 6 kV                         |
| Pollution degree        | 3                            |
| Insulation resistance   | >10 <sup>10</sup> Ω          |
| Contact resistance      | ≤3 mΩ                        |
| Stripping length        | 9 ... 11 mm                  |
| Limiting temperature    | -40 ... +125 °C              |



Pushing Performance  
Since 1945

## Technical characteristics

|   |         |
|---|---------|
| Mating cycles with other HMC components | ≥10,000 |
|---|---------|

## Material properties

|   |   |
|---|---|
| Material (insert)                         | Polycarbonate (PC)  |
| Colour (insert)                           | RAL 7032 (pebble grey)  |
| Material (contacts)                       | Copper alloy  |
| Surface (contacts)                        | HMC gold plated   |
| Colour (accessories)                      | Blue  |
| Material flammability class acc. to UL 94 | V-0   |
| RoHS                                      | compliant with exemption  |
| RoHS exemptions                           | 6(c): Copper alloy containing up to 4 % lead by weight            |
| ELV status                                | compliant with exemption  |
| China RoHS                                | 50  |
| REACH Annex XVII substances               | Not contained   |
| REACH ANNEX XIV substances                | Not contained   |
| REACH SVHC substances                     | Yes   |
| REACH SVHC substances                     | Potassium 1,1,2,2,3,3,4,4,4-nonafluorobutane-1-sulphonate<br>Lead |
| ECHA SCIP number                          | 5dbb3851-b94e-4e88-97a1-571845975242                              |
| California Proposition 65 substances      | Yes   |
| California Proposition 65 substances      | Lead<br>Nickel  |

## Specifications and approvals

|                |   |
|----------------|---|
| Specifications | IEC 60664-1<br>IEC 61984  |
| Approvals      | DNV GL  |
| UL / CSA       | UL 1977 ECBT2.E235076<br>UL 2237 PVVA2.E318390<br>CSA-C22.2 No. 182.3 PVVA8.E318390 |

## Commercial data

|                                |          |
|--------------------------------|----------|
| Packaging size                 | 1        |
| Net weight                     | 55.4 g   |
| Country of origin              | Germany  |
| European customs tariff number | 85366990 |



**Pushing Performance**  
Since 1945

## Commercial data

|        |   |
|--------|---|
| GTIN   | 5713140186095                                     |
| eCl@ss | 27440205 Contact insert for industrial connectors |



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

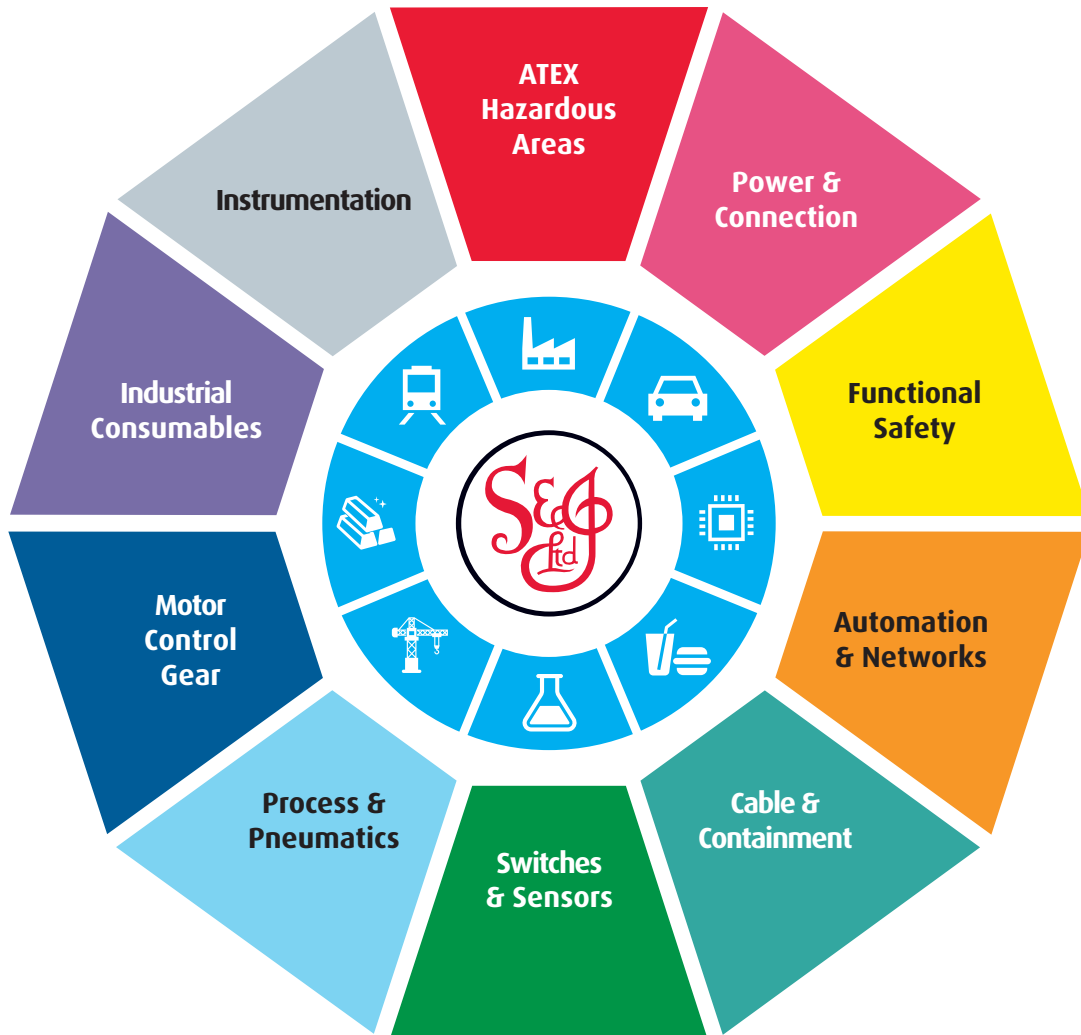

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**