

**2 ENTRIES****3 ENTRIES****4 ENTRIES****5 ENTRIES**

## MULTI-ENTRY SEALS

Ref.	Suitable for		n° entries	Ø Dia entry (mm)	Quantity Box/Bag
	<b>MAXIblock®</b>	<b>MAXIbrass®</b> <b>MAXIinox</b>			
36A3M1623	M16 + Pg11	M16 + Pg11	2	3	1.500/100
36A3M1624	M16 + Pg11	M16 + Pg11	2	4	1.000/100
36A3M16322	M16 + Pg11	M16 + Pg11	3	2,2	1.500/100
36A3M2025	M20 + Pg13,5	M20 + Pg13,5 + Pg16	2	5	500/100
36A3M2034	M20 + Pg13,5	M20 + Pg13,5 + Pg16	3	4	500/100
36A3M20356	M20 + Pg13,5	M20 + Pg13,5 + Pg16	3	5,6	500/100
36A3M2526	M25	M25 + Pg21	2	6	300/50
36A3M2536	M25	M25 + Pg21	3	6	300/50
36A3M2537	M25	M25 + Pg21	3	7	300/50
36A3M2545	M25	M25 + Pg21	4	5	300/50
36A3M2546	M25	M25 + Pg21	4	6	300/50
36A3M2554	M25	M25 + Pg21	5	4	300/50
36A3M3228	M32	M32	2	8	150/50
36A3M3239	M32	M32	3	9	150/50
36A3M32465	M32	M32	4	6,5	150/50
36A3M3248	M32	M32	4	8	150/50
36A3M4078	M40	M40	7	8	100/100
36A3M40106	M40	M40	10	6	100/100
36A3M5088	M50 + Pg 36	M50 + Pg 36	8	8	50/50
36C201629	Pg16	-	2	3+9	400/50

### Technical features:

MATERIAL  
HARDNESS  
DENSITY  
BREAKING RESISTANCE  
BREAKING ELONGATION  
TEARING  
OPERATING TEMPERATURE

COMPRESSION SET (24 hours at 100°C sch.25%) ASTM D 395 B

### Reference Norm:

ASTM D 2240  
ASTM D 1817  
ASTM D 412  
ASTM D 412  
ASTM D 624

NEOPRENE® (CR) rubber  
70 SHORE A  
1,358 gr/cm<sup>3</sup>  
15 N/mm<sup>2</sup> (Mpa)  
300%  
25 N/mm  
-40°C ÷ +120°C (continuous)  
+130°C (short periods)  
19%

### Chemical and physical resistance of the material:

FUEL and PETROL - critical  
GREASES and VEGETABLE OILS - sufficient  
LIQUID PARAFFIN - sufficient  
TURPENTINE - critical  
DILUTED ACIDS - not critical  
CHLORINE - not critical  
NORMALLY CHLORINATED WATER - not critical  
SEA WATER - not critical  
DILUTED ALKALI - not critical  
AGING - not critical  
OZONE 70 hours with elongation of 10% at 38°C ozone 50 pphm

### **Cembre SpA**

Via Serenissima, 9 - 25135 Brescia (Italy)  
Tel.: +39 030 36921 - Fax: +39 030 3365766  
Web: www.cembre.com - Email: info@cembre.com

Prepared by: Marketing dept.

Date: 18/06/2009



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

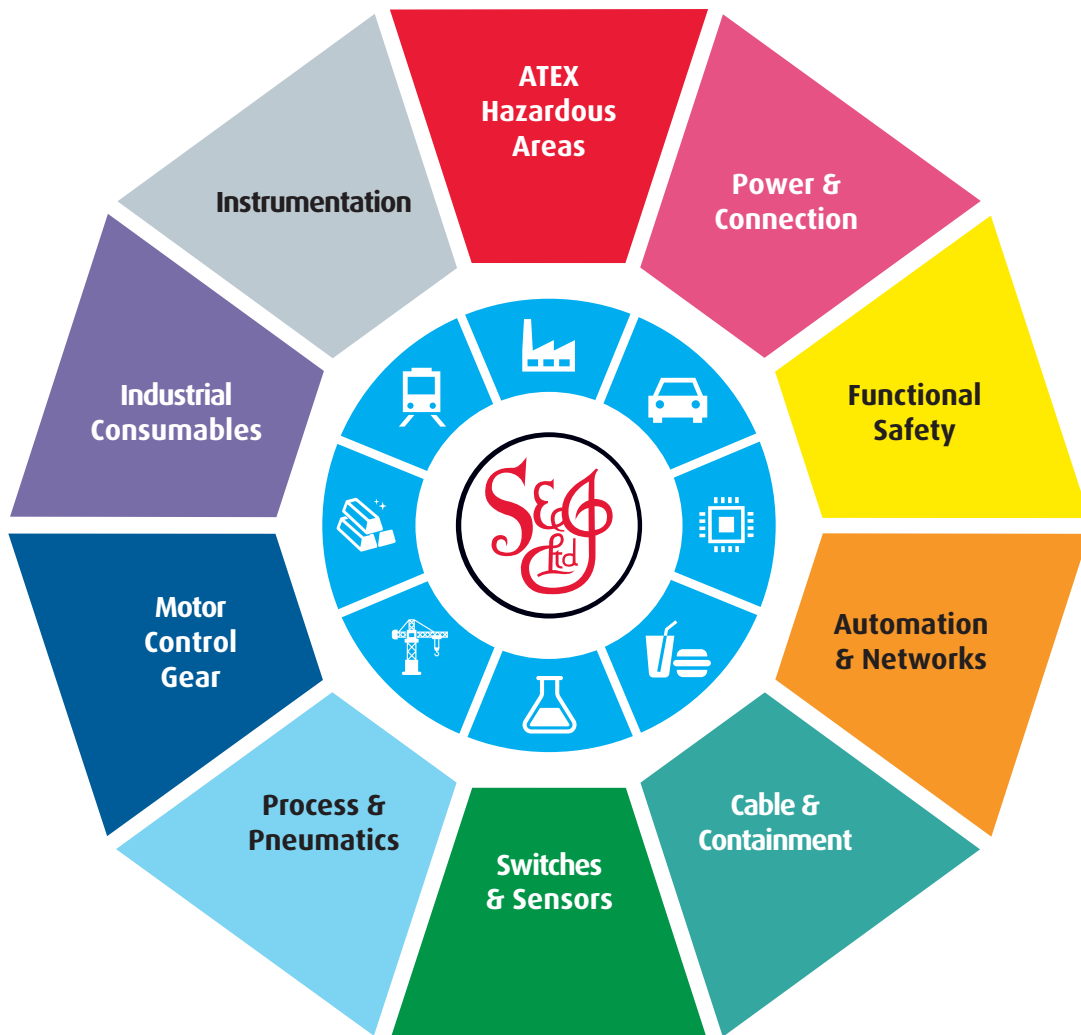

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**