

COPPER TUBE CRIMPING LUG TYPE AM for copper conductors

**Description:**

- A-M series lugs are manufactured from electrolytic copper tube Cu-OF CW008A conform to UNI EN 13600:2013. The dimensions of the tube are designed to obtain the most efficient electrical conductivity and mechanical strength to resist vibration and pull out.
- Cembre lugs are annealed to guarantee optimum ductility which is an absolute necessity for connectors which will have to withstand the severe deformation arising when compressed and any bending of the palm during installation.
- In applications subject to vibration, terminals still have to perform a reliable connection, annealing plays a vital role in avoiding cracking or breaks between the barrel and palm.
- The presence of an inspection hole facilitates full insertion of the conductor, whilst the barrel length has been designed to allow easy and accurate positioning of the dies during the crimping operation.
- Lugs are electrolytically tin plated with a minimum thickness of 3µm to avoid oxidation. A-M series lugs form an important part of Cembre crimping systems for power carrying conductors.

Each connector is marked as follows:

- Cembre trade mark and reference number.
- Nature and size of conductor (mm²).
- Ø stud (mm).

Markings:

- According to UL 486A standard (file E125401)

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766


Web: www.cembre.com - Email: info@cembre.com

Prepared by: Marketing dept.

Date: 27/09/2018

COPPERTUBE CRIMPING LUG TYPE AM

for copper conductors

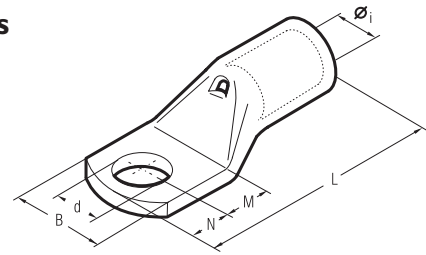

Sections and Dimensions:

Cond. Size sqmm	Ø Stud mm	Ref.	Dimensions mm					
			Øi	B	M	N	L	d
0,25÷1,5	3	A 03-M 3*	1,8	6,0	4,5	3,5	16,0	3,2
	3,5	A 03-M 3,5*	1,8	6,5	4,5	3,5	16,0	3,7
	4	A 03-M 4*	1,8	6,5	5,0	4,0	17,0	4,3
	5	A 03-M 5*	1,8	7,5	5,5	4,5	18,0	5,3
	6	A 03-M 6*	1,8	9,0	6,0	5,0	19,0	6,4
1,5÷2,5	3	A 06-M 3*	2,4	6,0	4,5	3,5	17,0	3,2
	3,5	A 06-M 3,5*	2,4	6,5	4,5	3,5	17,0	3,7
	4	A 06-M 4*	2,4	7,5	5,0	4,0	18,0	4,3
	5	A 06-M 5*	2,4	8,5	5,5	4,5	19,0	5,3
	6	A 06-M 6*	2,4	9,0	6,0	5,0	20,0	6,4
4÷6	8	A 06-M 8*	2,4	12,0	9,0	8,0	26,0	8,4
	3	A 1-M 3	3,6	7,5	4,5	3,5	20,5	3,2
	3,5	A 1-M 3,5	3,6	7,5	4,5	3,5	20,5	3,7
	4	A 1-M 4	3,6	8,0	5,0	4,0	21,5	4,3
	5	A 1-M 5	3,6	9,0	6,5	6,0	25,0	5,3
10	6	A 1-M 6	3,6	11,0	7,0	6,0	25,5	6,4
	8	A 1-M 8	3,6	14,0	9,0	8,0	29,5	8,4
	10	A 1-M 10	3,6	16,5	11,0	10,0	33,5	10,5
	4	A 2-M 4	4,6	10,0	5,0	4,0	22,5	4,3
	5	A 2-M 5	4,6	10,0	6,5	6,0	26,0	5,3
16	6	A 2-M 6	4,6	11,0	7,0	6,0	26,5	6,4
	8	A 2-M 8	4,6	15,0	9,0	8,0	30,5	8,4
	10	A 2-M 10	4,6	18,0	11,0	10,0	34,5	10,5
	12	A 2-M 12	4,6	19,0	14,0	12,0	39,5	13,2
	4	A 3-M 4	5,8	11,5	5,0	4,0	25,5	4,3
25	5	A 3-M 5	5,8	11,5	6,5	6,0	29,0	5,3
	6	A 3-M 6	5,8	11,5	7,0	6,0	29,5	6,4
	8	A 3-M 8	5,8	15,0	9,0	8,0	33,5	8,4
	10	A 3-M 10	5,8	18,0	11,0	10,0	37,5	10,5
	12	A 3-M 12	5,8	20,0	14,0	12,0	42,5	13,2
35	4	A 5-M 4	7,0	14,0	5,0	4,0	28,0	4,3
	5	A 5-M 5	7,0	14,0	6,5	6,0	31,5	5,3
	6	A 5-M 6	7,0	14,0	7,0	6,0	32,0	6,4
	8	A 5-M 8	7,0	15,0	9,0	8,0	36,0	8,4
	10	A 5-M 10	7,0	18,0	11,0	10,0	40,0	10,5
50	12	A 5-M 12	7,0	21,0	14,0	12,0	45,0	13,2
	5	A 7-M 5	8,9	17,0	6,5	6,0	34,0	5,3
	6	A 7-M 6	8,9	17,0	7,0	6,0	34,5	6,4
	8	A 7-M 8	8,9	17,0	9,0	8,0	38,5	8,4
	10	A 7-M 10	8,9	19,0	11,0	10,0	42,5	10,5
70	12	A 7-M 12	8,9	21,0	14,0	12,0	47,5	13,2
	6	A 10-M 6	10,0	19,0	8,0	7,0	38,5	6,4
	8	A 10-M 8	10,0	19,0	9,0	8,0	40,5	8,4
	10	A 10-M 10	10,0	20,0	11,5	9,5	44,5	10,5
	12	A 10-M 12	10,0	21,0	12,0	12,0	47,5	13,2
100	14	A 10-M 14	10,0	25,0	16,0	14,0	55,5	15,0
	16	A 10-M 16	10,0	26,0	18,0	16,0	59,5	17,0
	6	A 14-M 6	11,3	21,0	8,0	7,0	44,0	6,4
	8	A 14-M 8	11,3	21,0	9,0	8,0	46,0	8,4
	10	A 14-M 10	11,3	21,0	11,0	10,0	50,0	10,5
160	12	A 14-M 12	11,3	22,0	14,0	12,0	55,0	13,2
	14	A 14-M 14	11,3	25,0	16,0	14,0	59,0	15,0
	16	A 14-M 16	11,3	26,0	18,0	16,0	63,0	17,0

Cond. Size sqmm	Ø Stud mm	Ref.	Dimensions mm						
			Øi	B	M	N	L	d	
low stranded	flexible*	6	A 19-M 6	13,5	25,0	8,0	7,0	50,5	6,4
		8	A 19-M 8	13,5	25,0	9,0	8,0	52,5	8,4
		10	A 19-M 10	13,5	25,0	11,0	10,0	56,5	10,5
		12	A 19-M 12	13,5	25,0	14,0	12,0	61,5	13,2
		14	A 19-M 14	13,5	25,0	16,0	14,0	65,5	15,0
		16	A 19-M 16	13,5	27,0	18,0	16,0	69,5	17,0
		20	A 19-M 20	13,5	29,5	22,0	20,0	77,5	21,0
120	95	8	A 24-M 8	15,2	28,5	9,0	8,0	54,0	8,4
		10	A 24-M 10	15,2	28,5	11,0	10,0	58,0	10,5
		12	A 24-M 12	15,2	28,5	14,0	12,0	63,0	13,2
		14	A 24-M 14	15,2	28,5	16,0	14,0	67,0	15,0
		16	A 24-M 16	15,2	28,5	18,0	16,0	71,0	17,0
150	120	20	A 24-M 20	15,2	30,0	22,0	20,0	79,0	21,0
		8	A 30-M 8	16,7	31,5	13,0	11,0	69,0	8,4
		10	A 30-M 10	16,7	31,5	13,0	11,0	69,0	10,5
		12	A 30-M 12	16,7	31,5	16,0	14,0	75,0	13,2
		14	A 30-M 14	16,7	31,5	18,0	16,0	79,0	15,0
185	150	16	A 30-M 16	16,7	31,5	19,0	17,0	81,0	17,0
		20	A 30-M 20	16,7	31,5	22,0	20,0	87,0	21,0
		8	A 37-M 8	19,2	35,5	13,0	11,0	76,0	8,4
		10	A 37-M 10	19,2	35,5	13,0	11,0	76,0	10,5
		12	A 37-M 12	19,2	35,5	16,0	14,0	82,0	13,2
240	185	14	A 37-M 14	19,2	35,5	18,0	16,0	86,0	15,0
		16	A 37-M 16	19,2	35,5	19,0	17,0	88,0	17,0
		20	A 37-M 20	19,2	35,5	22,0	20,0	94,0	21,0
		8	A 48-M 8	21,1	39,0	13,0	11,0	77,5	8,4
		10	A 48-M 10	21,1	39,0	13,0	11,0	77,5	10,5
300	240	12	A 48-M 12	21,1	39,0	14,0	12,0	79,5	13,2
		14	A 48-M 14	21,1	39,0	18,0	16,0	92,0	15,0
		16	A 48-M 16	21,1	39,0	19,0	17,0	94,0	17,0
		20	A 48-M 20	21,1	39,0	22,0	20,0	100,0	21,0
		10	A 60-M 10	23,7	44,0	20,0	11,0	96,0	10,5
400	300	12	A 60-M 12	23,7	44,0	20,0	14,0	99,0	13,2
		14	A 60-M 14	23,7	44,0	22,0	16,0	103,0	15,0
		16	A 60-M 16	23,7	44,0	22,0	19,0	106,0	17,0
		20	A 60-M 20	23,7	44,0	24,0	23,0	112,0	21,0
		12	A 80-M 12	27,0	51,0	22,0	19,0	113,0	13,2
500	400	14	A 80-M 14	27,0	51,0	22,0	19,0	113,0	15,0
		16	A 80-M 16	27,0	51,0	22,0	19,0	113,0	17,0
		20	A 80-M 20	27,0	51,0	24,0	23,0	119,0	21,0
		16	A 100-M 16	30,3	56,5	22,0	19,0	117,0	17,0
		20	A 100-M 20	30,3	56,5	24,0	23,0	123,0	21,0
630	500	16	A 120-M 16*	33,4	61,6	22,0	19,0	128,0	17,0
		20	A 120-M 20*	33,4	61,6	24,0	23,0	134,0	21,0
800	630	16	A 160-M 16*	38,0	72,0	24,0	19,0	141,0	17,0
		20	A 160-M 20*	38,0	72,0	24,0	23,0	145,0	21,0
1000	800	16	A 200-M 16*	44,0	80,0	24,0	19,0	158,0	17,0
		20	A 200-M 20*	44,0	80,0	24,0	23,0	162,0	21,0

*Actual conductor section may require a larger lug eg for 120 mm² size use A30-... lug.

*Not UL approved

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)

Tel.: +39 030 36921 - Fax: +39 030 3365766

Web: www.cembre.com - Email: info@cembre.com

Prepared by: Marketing dept.

Date: 27/09/2018



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

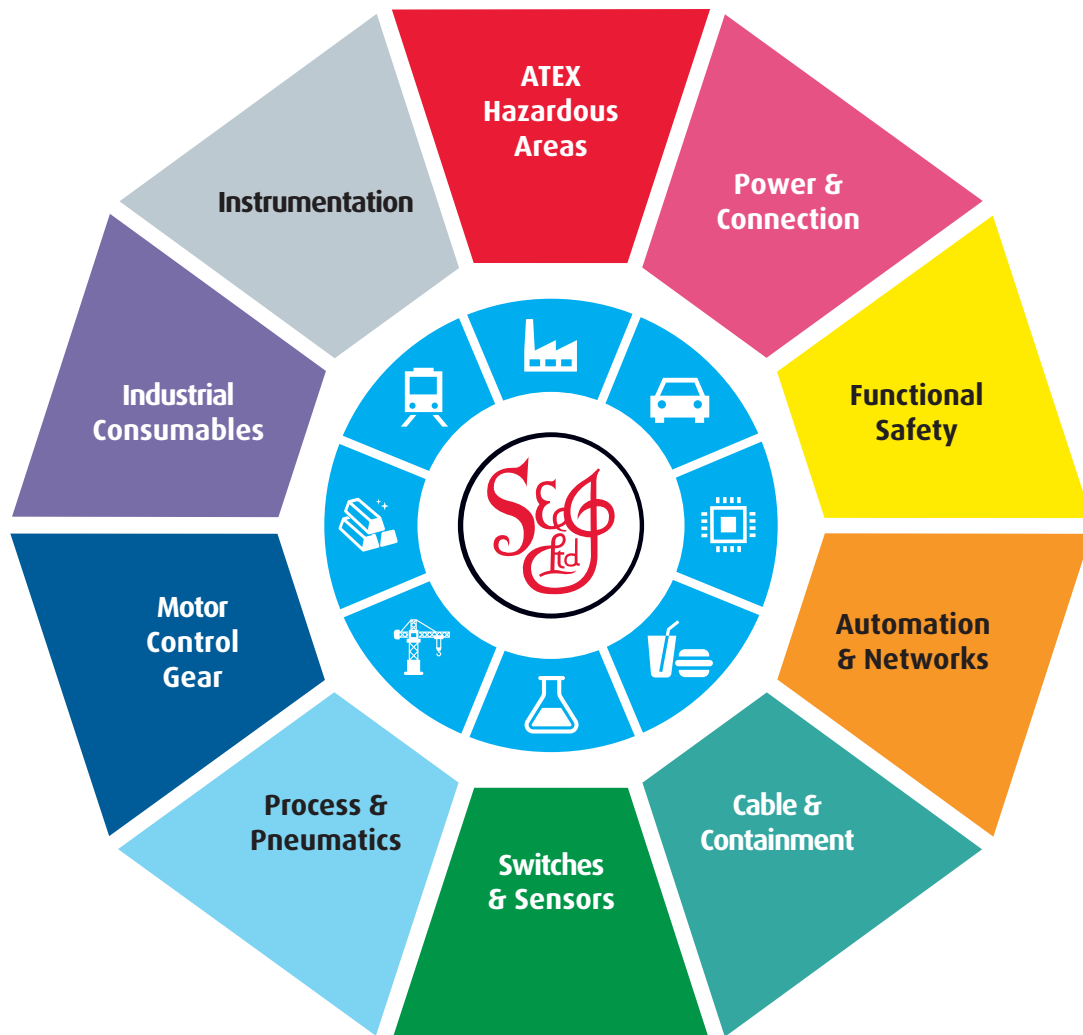

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk