

# FBS 2-3,5 BU - Plug-in bridge



3213086

<https://www.phoenixcontact.com/gb/products/3213086>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Plug-in bridge, pitch: 3.5 mm, number of positions: 2, color: blue



## Your advantages

- The 2- to 50-pos. jumpers can bridge up to 50 terminal blocks in the two bridge shafts of the CLIPLINE complete system in one step

## Commercial Data

Item number	3213086
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE2Z2X
Product Key	BE2Z2X
Catalog Page	Page 403 (C-1-2019)
GTIN	4046356594394
Weight per Piece (including packing)	0.715 g
Weight per Piece (excluding packing)	0.7 g
Customs tariff number	85366990
Country of origin	DE

# FBS 2-3,5 BU - Plug-in bridge



3213086

<https://www.phoenixcontact.com/gb/products/3213086>

## Technical Data

### Product properties

Product type	Jumper
Number of positions	2
Pitch	3.5 mm

### Electrical properties

Maximum load current	17.5 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
----------------------	---

### Connection data

Maximum load current	17.5 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
----------------------	---

### Dimensions

Pitch	3.5 mm
-------	--------

### Material specifications

Color	blue
Material	Copper
Flammability rating according to UL 94	V0
Insulating material	PA

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

### Mounting

Mounting type	Plug-in mounting
---------------	------------------

# FBS 2-3,5 BU - Plug-in bridge




3213086

<https://www.phoenixcontact.com/gb/products/3213086>

## Drawings

Schematic diagram

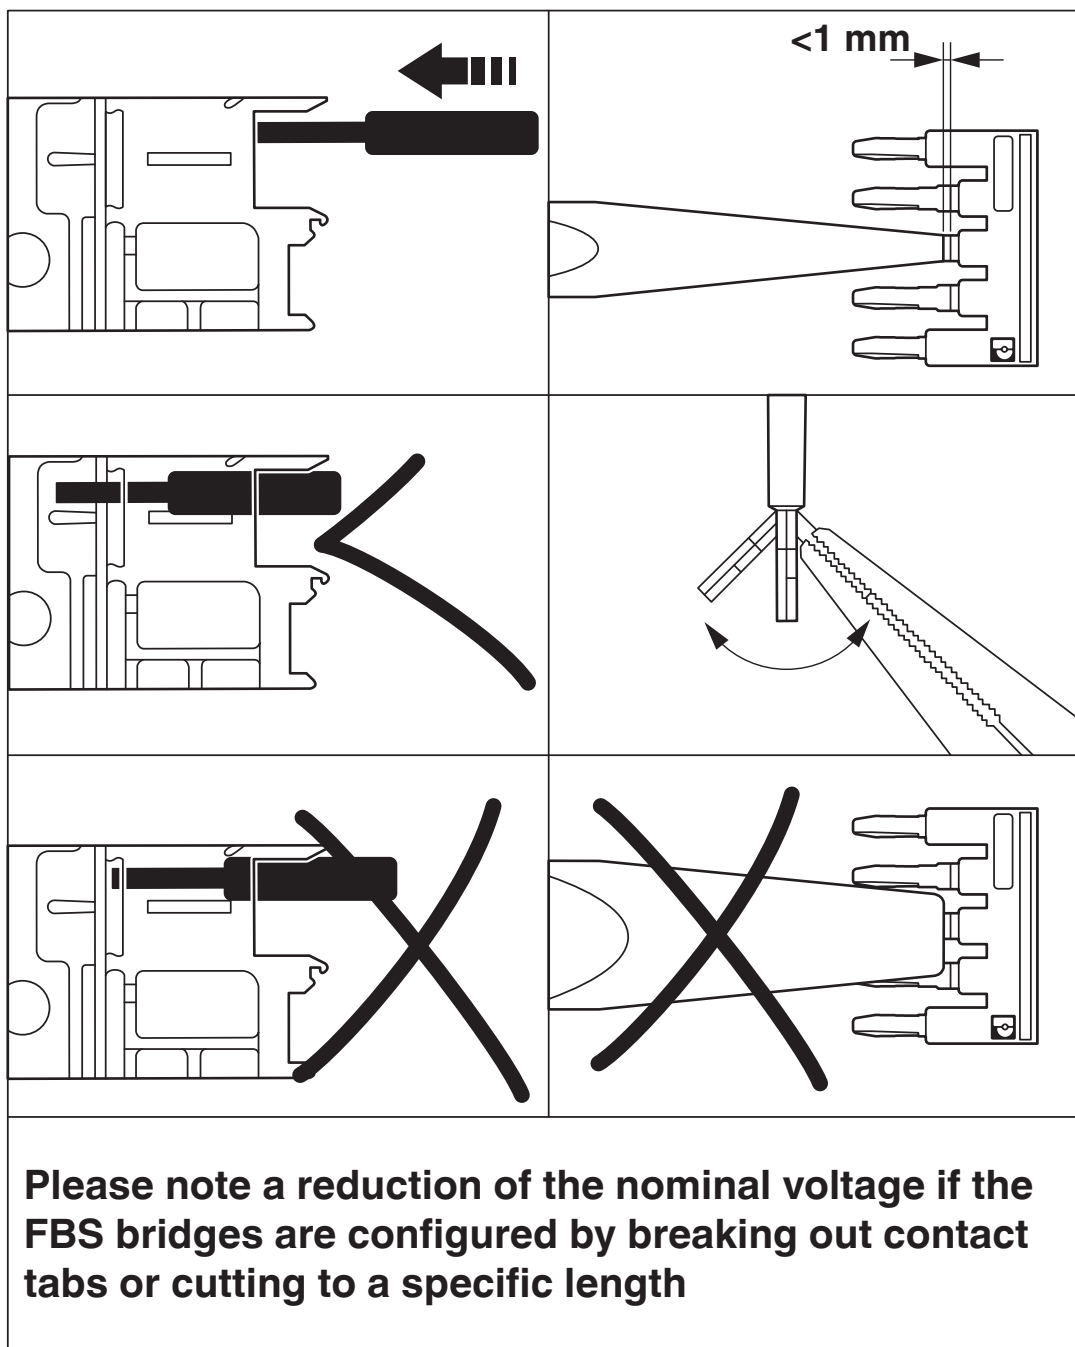

# FBS 2-3,5 BU - Plug-in bridge



3213086

<https://www.phoenixcontact.com/gb/products/3213086>

## Classifications

### ECLASS

ECLASS-11.0	27141140
ECLASS-12.0	27141140
ECLASS-13.0	27250303

### ETIM

ETIM 8.0	EC000489
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# FBS 2-3,5 BU - Plug-in bridge

3213086

<https://www.phoenixcontact.com/gb/products/3213086>

## Environmental Product Compliance

China RoHS

Environmentally friendly use period: unlimited = EFUP-e

No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)



**SCATTERGOOD  
& JOHNSON LTD**  
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

**[www.scatts.co.uk](http://www.scatts.co.uk)**