

holder for cylindrical fuses, with LED (31133)



The picture may show a similar product.

Description

Part No.: 31133

AMBUS® Panel

holder for cylindrical fuses, with LED

10 x 38 / 3P

32 A / 110 - 690 V

System

DIN rail

Advantages of the product

large clamping range

holder for label

Product group 17

Subgroup 06

pack size 4
 EAN 4021267311339

catalog page 2020 : 6.6

ECLASS 6.1 27142190
 ECLASS 7.1 27142190
 ETIM 4.0 EC002705
 ETIM 5.0 EC002705

Approvals

Standards

IEC 60947-1:2007 + A1:2010 + A2:2014
 IEC 60947-3:2008 + A1:2012 + A2:2015
 UL 4248-1

Approvals

IEC (CB) , CSA , UL , CCC , EAC



for UL feeder circuits >250V

type number: AES10x38
 EAC Type: AES

UL file: E230163, UL category (for USA): IZLT <http://www.ul.com>
 UL file: E230163, UL category (for Canada): IZLT7 <http://www.ul.com>
 CSA file: 110285, CSA class: 6225-01 <http://directories.csa-international.org>
 CCC certificate: 2012010302581751

Technical data

for fuse links size: 10x38
 fuse links acc. to standard: IEC / HD 60269-2
 permitted power dissipation of the fuse-link: 3 W

Details IEC**Standards**

IEC 60947-1:2007 + A1:2010 + A2:2014

IEC 60947-3:2008 + A1:2012 + A2:2015

Electrical data IEC

Rated current (IEC): 32 A
 rated voltage (IEC) AC: 690 V
 min. operating voltage AC: 110 V
 max. permitted voltage (IEC) AC: 725 V

rated isolation voltage U_i AC: 690 Vrated surge voltage U_{imp} : 6 kV

Utilisation category AC (IEC 60947-3): AC-22B (400V)

cond. short-circuit current with fuses (AC): 100 kA / 400 V (32A)
 100 kA / 500 V (25A)

approved with fuse links of operation class: gG

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.6 W.

(The power dissipation at full load would be 0.9 W.)

further utilisation category AC (IEC 60947-3): AC-20B (1000 V) at pollution degree 2

A fuse-combination unit acc. to IEC 60947-3 can only be operated at a higher voltage than its rated voltage, if it is used as a fuse-disconnector without breaking capacity, up to its max. rated insulation voltage and labelled as such.

for fuse links as per IEC / EN 60269-2 with permitted rated power dissipations

up to max. 3W for gG/gL

up to max. 1.2W for aM

Details UL**Standards**

UL 4248-1

for UL feeder circuits >250V
suitable for field-installed conductors

Electrical data UL

rated current (UL): 30 A
rated voltage (UL) AC: 600 V
min. operating voltage AC: 110 V
rated frequency (UL): 50 / 60 Hz
rated voltage (UL) DC: 600 V
for wires UL: Cu 75°C

SCCR: 100 kA

Mechanical data

W x H x D: 54 x 81 x 58
weight: 17.0 kg/100
poles: 3-pole

degree of protection: IP20
front degree of protection: IP20

Terminal points

cage clamp connection

screw drive:	PZ2
wire stripping:	11 mm
min. cross-section:	0.75 mm ²
max. cross-section:	25 mm ²
Md min.:	2.0 Nm
Md max.:	2.5 Nm
Not suitable for aluminium cables !	

min. cross-section UL:	AWG 18
max. cross-section UL:	AWG 4
torque (UL):	18 - 22 lb-in
for wires UL:	Cu 75°C

for applications acc. to IEC / EN :

1 wire:

Cu 0,75 - 25 mm²

2 wires (of same cross-section):

Cu 0,75 - 10 mm²

flexible cables, directly or with wire-end ferrule

(flexible cables of max. cross-section may not fit when using wire-end ferrule)

Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

for applications acc. to UL / CSA :

only Cu cables acc. to UL 486E

1 wire:

AWG 18 - AWG 8, Class B, Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

AWG 6 - AWG 4, Class C, Md 2,5 - 3,0 Nm / 22 - 26 lb.in.

2 wires (of identical cross-section):


AWG 18 - AWG 8, Class B, Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

AWG 6, Class C, Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

Reference

The indicator light signals that the fuse has tripped, but only when the closed fuse-holder is under voltage.

Accessories



31102

comb-type busbar, 3-pole, bridge type, pitch 18 mm
80 A, 1 m long
16 mm²




31103

connection terminal, side connection
6 - 25 mm²
for: 31101, 31102



31157

connection terminal, front connection
6 - 25 mm²
for: 31101, 31102



31549

comb-type busbar, 3-pole, bridge type, pitch 18 mm
100 A, 1 m long
25 mm²



31550

connection terminal, front connection
6 - 35 mm²
for: 31549, 31561



SCATTERGOOD & JOHNSON LTD

ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS


At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.

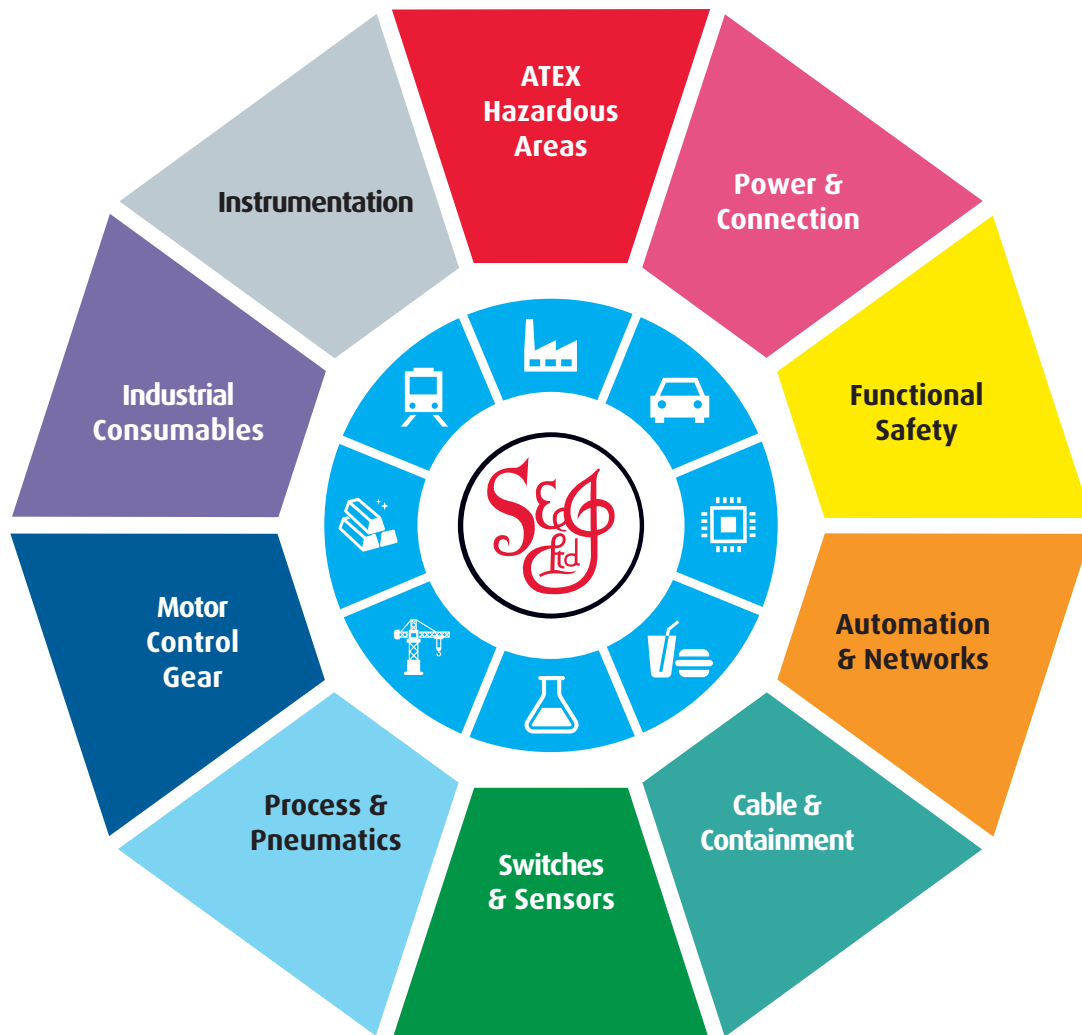

Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk