

UK 10,3-HESI 1000V - Fuse holder



3211236

<https://www.phoenixcontact.com/gb/products/3211236>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse holder, fuse type: Glass / ceramics / ..., fuse type: gPV 10.3 x 38 mm in accordance with 60269-6, nom. voltage: 1000 V DC, nominal current: 30 A, connection method: Screw connection, Rated cross section: 16 mm², cross section: 1.5 mm²- 25 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- Fuse holder for fusing PV strings 1000 V DC
- Easy to bridge
- For 10 x 38 gPV fuse-links in accordance with IEC 60269-6

UK 10,3-HESI 1000V - Fuse holder



3211236

<https://www.phoenixcontact.com/gb/products/3211236>

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics / ...
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	4 W
Fuse	gPV 10.3 x 38 mm in accordance with 60269-6

Connection data

Number of connections per level	2
Nominal cross section	25 mm ²
Rated cross section AWG	3

Level 1 above 1 below 1

Screw thread	M5
Tightening torque	2 ... 2.5 Nm
Stripping length	11 mm
Internal cylindrical gage	A7
Connection in acc. with standard	IEC 60269-1 / -2
Conductor cross section rigid	1.5 mm ² ... 25 mm ²
Cross section AWG	14 ... 4 (converted acc. to IEC)
Conductor cross section flexible	0.75 mm ² ... 25 mm ²
Conductor cross section, flexible [AWG]	18 ... 4 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	1.5 mm ² ... 16 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 16 mm ²
Cross-section with insertion bridge, rigid	10 mm ²
Cross-section with insertion bridge, flexible	10 mm ²
2 conductors with same cross section, solid	1.5 mm ² ... 4 mm ²
2 conductors with same cross section, flexible	0.75 mm ² ... 10 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	1.5 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	1.5 mm ² ... 10 mm ²
Nominal current	30 A (the current and voltage are determined by the fuse)
Maximum load current	30 A (the current and voltage are determined by the fuse)
Nominal voltage	1000 V DC (the current and voltage are determined by the fuse)

UK 10,3-HESI 1000V - Fuse holder



3211236

<https://www.phoenixcontact.com/gb/products/3211236>

Nominal cross section	16 mm ²
-----------------------	--------------------

Dimensions

Width	18 mm
Height	81 mm
Depth on NS 35/7,5	65.5 mm
Depth on NS 35/15	73 mm

Material specifications

Color	black
Flammability rating according to UL 94	V2
Insulating material group	IIIa
Relative insulation material temperature index (Elec., UL 746 B)	125 °C

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 85 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 55 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60269-1 / -2
----------------------------------	------------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


UK 10,3-HESI 1000V - Fuse holder

3211236

<https://www.phoenixcontact.com/gb/products/3211236>

Drawings

Circuit diagram

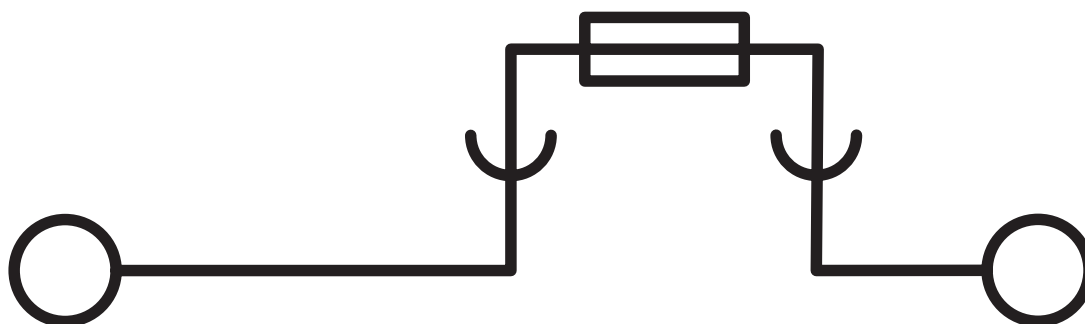

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk