


PTU 35/4X6/6X2,5-FE - Potential collective terminal



3214082

<https://www.phoenixcontact.com/gb/products/3214082>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Potential collective terminal, nom. voltage: 1000 V, nominal current: 105 A, number of connections: 11, connection method: Screw connection, 1st level connection left, cross section: 1.5 mm² - 50 mm², Push-in connection, First level connection, interior, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, color: black/yellow

Your advantages

- The terminal block base is ideal for use in building installation and machine building applications
- In addition to the testing facility in the double function shaft, all terminal blocks provide an additional test connection
- The compact design and front connection enable wiring in a confined space
- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors

PTU 35/4X6/6X2,5-FE - Potential collective terminal



3214082

<https://www.phoenixcontact.com/gb/products/3214082>

Technical data

Notes

| | |
|---------|---|
| General | In the end application, the applicable safety regulations for overload and short-circuit protection on the connected conductors must be considered. |
|---------|---|

Product properties

| | |
|-----------------------|-----------------------|
| Product type | Potential distributor |
| Number of connections | 11 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 2 |

Electrical properties

| | |
|---|--------|
| Maximum power dissipation for nominal condition | 4.06 W |
|---|--------|

Connection data

| | |
|---------------------------------|-----|
| Service Entrance | yes |
| Number of connections per level | 11 |

1st level connection left

| | |
|---|---|
| Screw thread | M6 |
| Tightening torque | 3.2 ... 3.7 Nm |
| Stripping length | 18 mm |
| Internal cylindrical gage | B9 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 1.5 mm ² ... 50 mm ² |
| Cross section AWG | 14 ... 2 (converted acc. to IEC) |
| Conductor cross section flexible | 1.5 mm ² ... 50 mm ² |
| Conductor cross section, flexible [AWG] | 14 ... 2 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1.5 mm ² ... 35 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 1.5 mm ² ... 35 mm ² |
| 2 conductors with same cross section, solid | 1.5 mm ² ... 16 mm ² |
| 2 conductors with the same cross-section AWG rigid | 16 ... 6 (converted acc. to IEC) |
| 2 conductors with same cross section, flexible | 1.5 mm ² ... 10 mm ² |
| 2 conductors with the same cross-section AWG flexible | 16 ... 8 (converted acc. to IEC) |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 1.5 mm ² ... 10 mm ² |
| Nominal current | 105 A |
| Maximum load current | 105 A (The maximum load current must not be exceeded by the total current of all connected conductors.) |
| Nominal voltage | 1000 V |

PTU 35/4X6/6X2,5-FE - Potential collective terminal



3214082

<https://www.phoenixcontact.com/gb/products/3214082>

First level connection, interior

| | |
|---|---|
| Stripping length | 12 mm |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.5 mm ² ... 10 mm ² |
| Cross section AWG | 20 ... 8 (converted acc. to IEC) |
| Conductor cross section flexible | 0.5 mm ² ... 6 mm ² |
| Conductor cross section, flexible [AWG] | 20 ... 10 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |
| Nominal current | 41 A |
| Maximum load current | 41 A |
| Nominal voltage | 1000 V |
| Nominal cross section | 6 mm ² |

1st level connection right

| | |
|---|--|
| Stripping length | 8 mm ... 10 mm |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.14 mm ² ... 4 mm ² |
| Cross section AWG | 26 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 14 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1.5 mm ² |
| Nominal current | 24 A |
| Maximum load current | 24 A |
| Nominal voltage | 1000 V |
| Nominal cross section | 2.5 mm ² |

First level connection, interior Connection cross sections directly pluggable

| | |
|---|--|
| Conductor cross section rigid | 1 mm ² ... 10 mm ² |
| Conductor cross section, rigid [AWG] | 18 ... 8 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 1 mm ² ... 6 mm ² |

1st level connection right Connection cross sections directly pluggable

| | |
|---|--|
| Conductor cross section rigid | 0.34 mm ² ... 4 mm ² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.34 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.34 mm ² ... 2.5 mm ² |

Dimensions

| | |
|-------|---------|
| Width | 16.3 mm |
|-------|---------|

PTU 35/4X6/6X2,5-FE - Potential collective terminal



3214082

<https://www.phoenixcontact.com/gb/products/3214082>

| | |
|--------------------|----------|
| Height | 110.4 mm |
| Depth on NS 35/7,5 | 48.8 mm |
| Depth on NS 35/15 | 56.3 mm |

Material specifications

| | |
|---|--------------|
| Color | black/yellow |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Electrical tests

Surge voltage test

| | |
|---|-------------|
| Test voltage setpoint | 9.8 kV |
| Result | Test passed |
| Short-time withstand current 35 mm ² | 3 kA |
| Short-time withstand current 50 mm ² | 4.8 kA |
| Result | Test passed |

Power-frequency withstand voltage

| | |
|-----------------------|-------------|
| Test voltage setpoint | 2.2 kV |
| Result | Test passed |

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Mechanical tests

Mechanical strength

| | |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

Attachment on the carrier

| | |
|-------------------------|-------|
| DIN rail/fixing support | NS 35 |
|-------------------------|-------|

PTU 35/4X6/6X2,5-FE - Potential collective terminal



3214082

<https://www.phoenixcontact.com/gb/products/3214082>

| | |
|---------------------|-------------|
| Test force setpoint | 10 N |
| Result | Test passed |

Test for conductor damage and slackening

| | |
|--------------------------------|------------------------------|
| Rotation speed | 10 rpm |
| Revolutions | 135 |
| Conductor cross section/weight | 1.5 mm ² / 0.4 kg |
| | 35 mm ² / 6.8 kg |
| | 50 mm ² / 9.5 kg |
| Result | Test passed |

Test for conductor damage and slackening

| | |
|--------------------------------|------------------------------|
| Rotation speed | 10 rpm |
| Revolutions | 135 |
| Conductor cross section/weight | 0.5 mm ² / 0.3 kg |
| | 6 mm ² / 1.4 kg |
| | 10 mm ² / 2 kg |
| Result | Test passed |

Test for conductor damage and slackening

| | |
|--------------------------------|-------------------------------|
| Rotation speed | 10 rpm |
| Revolutions | 135 |
| Conductor cross section/weight | 0.14 mm ² / 0.2 kg |
| | 2.5 mm ² / 0.7 kg |
| | 4 mm ² / 0.9 kg |
| Result | Test passed |

Environmental and real-life conditions

Aging

| | |
|--------------------|-------------|
| Temperature cycles | 192 |
| Result | Test passed |

Needle-flame test

| | |
|------------------|-------------|
| Time of exposure | 30 s |
| Result | Test passed |

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Spectrum | Service life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | 6.12 (m/s ²)/Hz |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

PTU 35/4X6/6X2,5-FE - Potential collective terminal



3214082

<https://www.phoenixcontact.com/gb/products/3214082>

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 30g |
| Shock duration | 18 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|--|---|
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
| | IEC 60947-7-1 |
| | IEC 60947-7-1 |

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

PTU 35/4X6/6X2,5-FE - Potential collective terminal




3214082

<https://www.phoenixcontact.com/gb/products/3214082>

Drawings

Circuit diagram

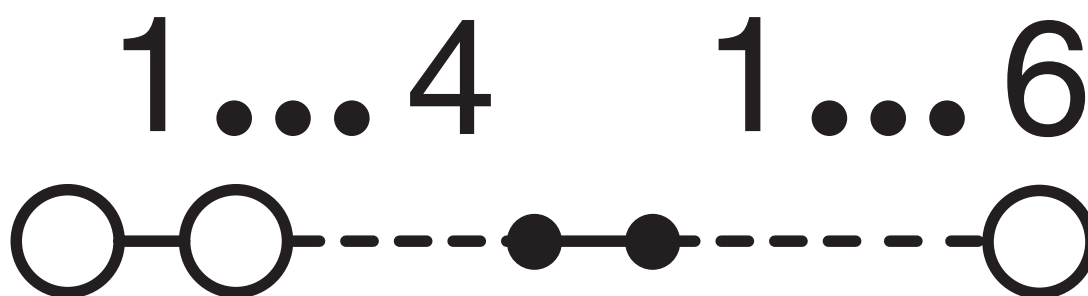

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk



**SCATTERGOOD
& JOHNSON LTD**
ELECTRICAL ENGINEERING & FLUID CONTROL DISTRIBUTORS

Est.1899

At Scattergood & Johnson Ltd, we pride ourselves on being a technical distributor to specialist industries.

Working with a range of quality product manufacturers across a number of specialist markets, we are not your average 'box shifter' - we are your technical and supply chain partner.

We fully support every product we sell - for free! Our internal team and external sales engineers can answer any product or application question, no matter the complexity.

Backing up this technical ability is a range of 50,000+ products available from stock for nationwide next day delivery (same day if required!), or you can collect what you need from any of our trade counters around the UK.

Select your specialist interest below to learn more about how we can help.



Online, In Branch and On the Road - Scattergood & Johnson Ltd, there when you need us.

www.scatts.co.uk