


RSMCK

PICO (M8) Field Attachable Connector, Male Straight, Screw Termination, 3 and 4 pole, Cable Range 3.5 - 5mm, brass coupling nut, for Wire Size from 26AWG up to 20 AWG, IP 67 / NEMA 6P Rated.

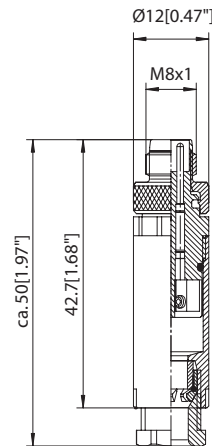

Technical Data

Material

Insert	PUR
Contact	Brass, gold over nickel plated
Body	PA, Black
Coupling Nut	Brass over nickel

Electrical

Current Rating	4A
Voltage Rating	3 pole: 60V 4 pole: 30V

Mechanical


Temperature	-40°C to + 85°C (-40°F to +185°F)
Protection	IP 67, NEMA 6P
Termination	Terminal Screws
Max. Wire Size	0.14 - 0.5mm ² max (26 AWG up to 20 AWG)
Cable OD:	3.5mm to 5mm (0.138" to 0.197")

Features & Benefits


IP67/NEMA 6P rated. Easy assembly with screw terminals. Wire gauges from 0.14mm² to 0.50mm² (26 AWG to 20 AWG). Gold over nickel plated brass contacts. Cable exit allowing cable OD from 3.5 mm to 5mm (.138" to .197").

Face Views / Pin Color Code

3P Female



4P Female



Part Number

Poles

Gender

RSMCK 3	3	Male
RSMCK 4	4	