




| | | |
|---|---|-----|
| Product designation | Three-phase connection busbars 45mm/1.77" spacing | |
| Product type designation | 11SMX | |
| Description | Three-phase connection busbars 45mm/1.77" spacing | |
| Accessories for | SM1P..., SM1R... | |
| Auxiliary contact characteristics | | |
| Rated insulation voltage U_i IEC/EN | V | 690 |
| Rated impulse withstand voltage U_{imp} | kV | 4 |
| Operational characteristics | | |
| IEC maximum current (I_{max}) | A | 63 |
| Mechanical features | | |
| Weight | g | 71 |
| Dimensions [mm (in)] | | |

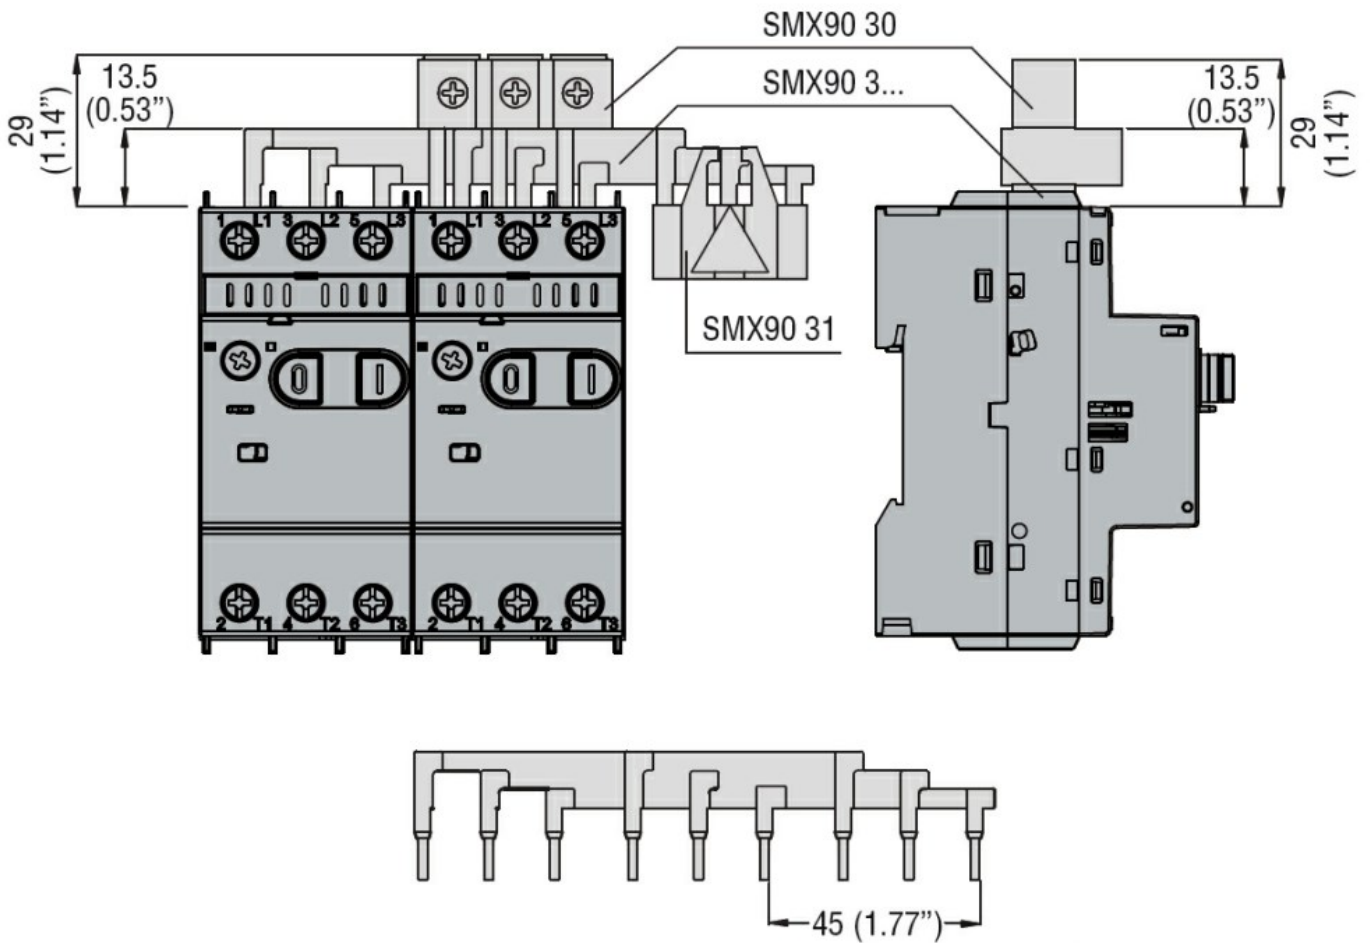

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification