




Product designation			Three-phase connection busbars 45mm/1.77" spacing
Product type designation			11SMX
Description			Three-phase connection busbars 45mm/1.77" spacing
Accessories for			SM1P..., SM1R...
Auxiliary contact characteristics			
Rated insulation voltage U_i IEC/EN	V	690	
Rated impulse withstand voltage U_{imp}	kV	4	
Operational characteristics			
IEC maximum current (I_{max})	A	63	
Mechanical features			
Weight	g	92	
Dimensions [mm (in)]			

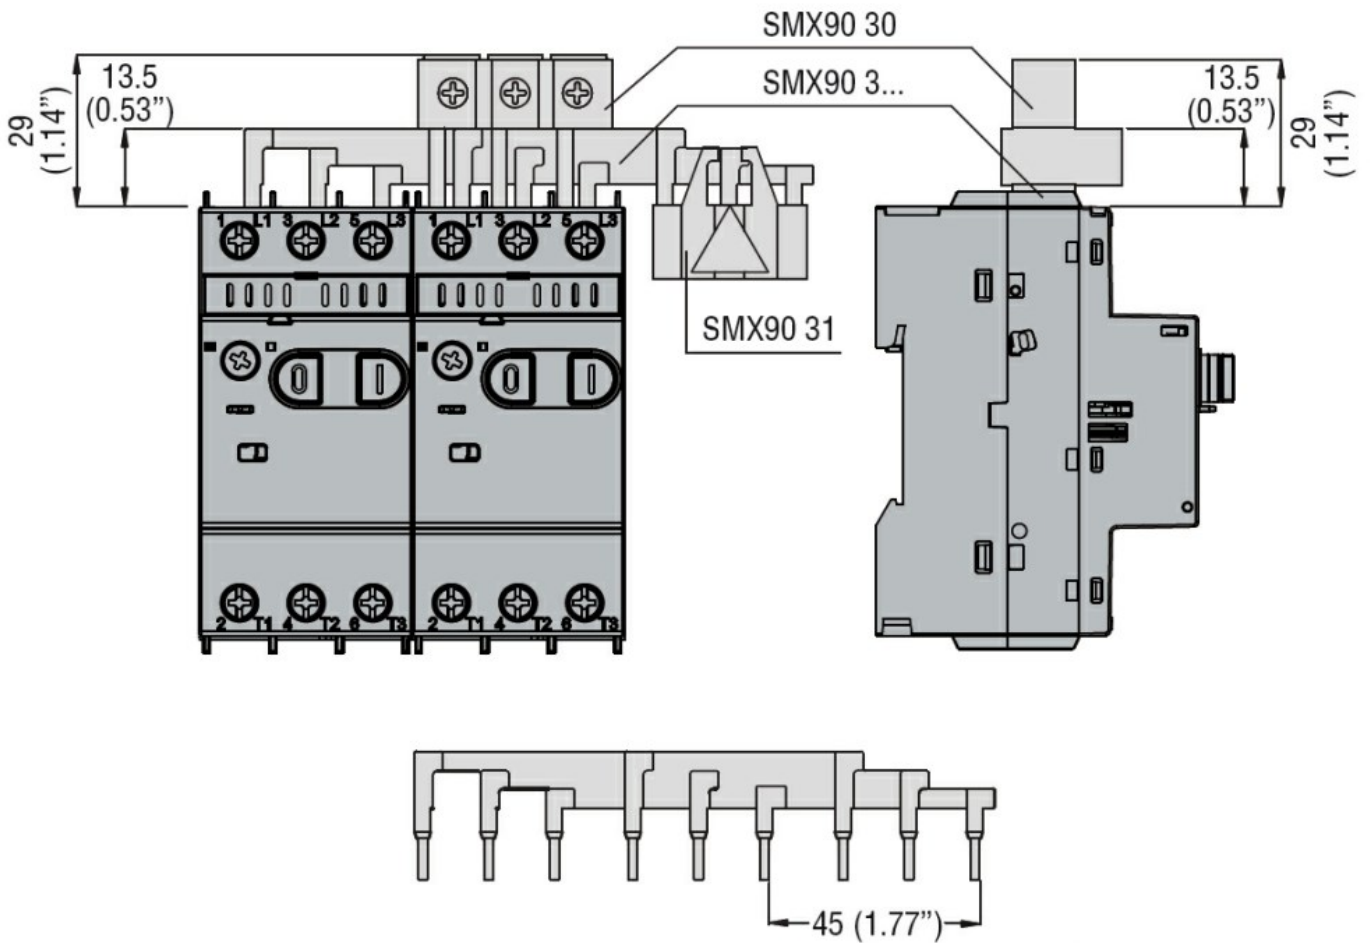

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification