



Product designation

Three-phase  
connection  
busbars  
54mm/2.13"  
spacing

Product type designation

11SMX

Description

Three-phase  
connection  
busbars  
54mm/2.13"  
spacing

Accessories for

SM1P..., SM1R...

**Auxiliary contact characteristics**

Rated insulation voltage  $U_i$  IEC/EN V 690

Rated impulse withstand voltage  $U_{imp}$  kV 4


**Operational characteristics**

IEC maximum current ( $I_{max}$ ) A 63

**Mechanical features**

Weight g 81

**Dimensions [mm (in)]**

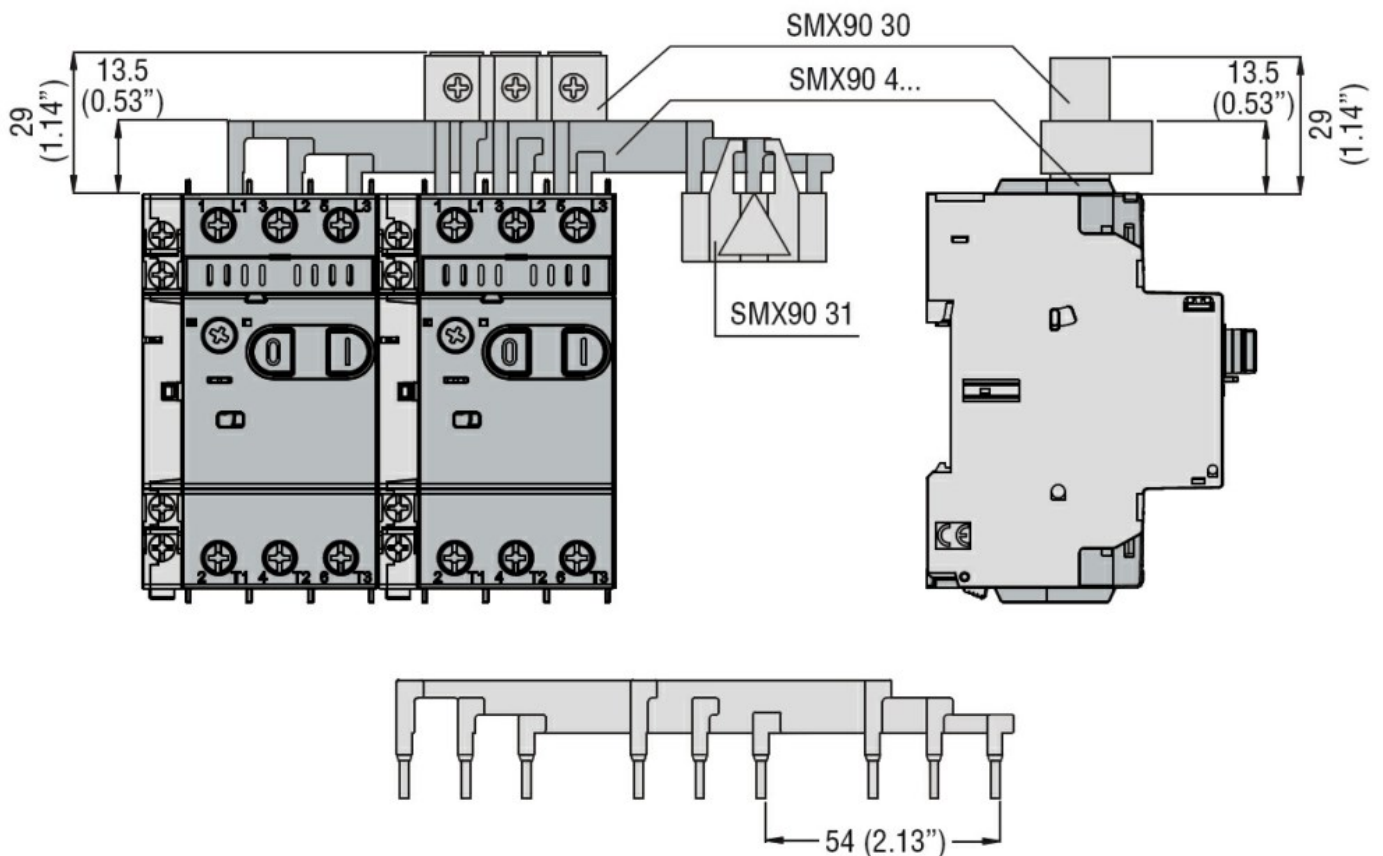

**Certifications and compliance**

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

□