




Mechanical features


Fixing

Front lateral
mounting

Dimensions [mm (in)]

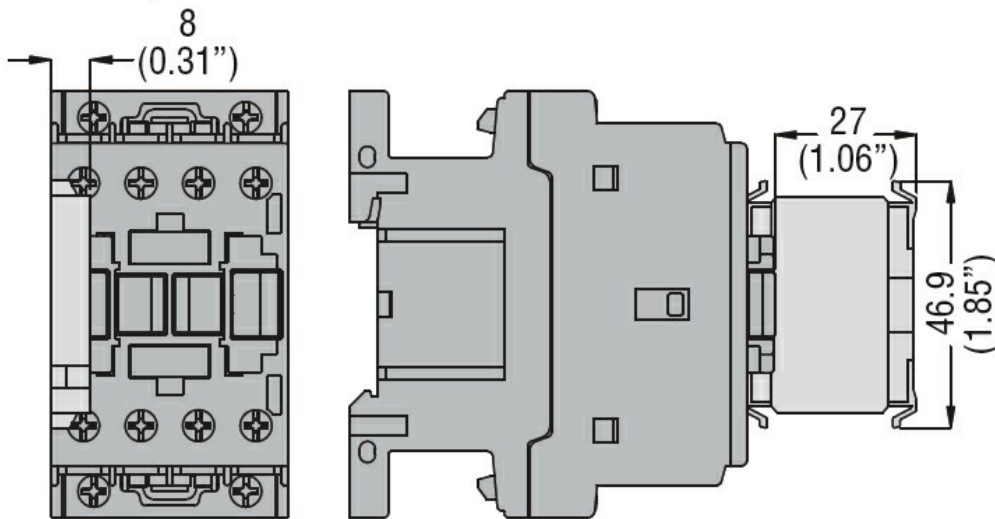

Wiring diagrams

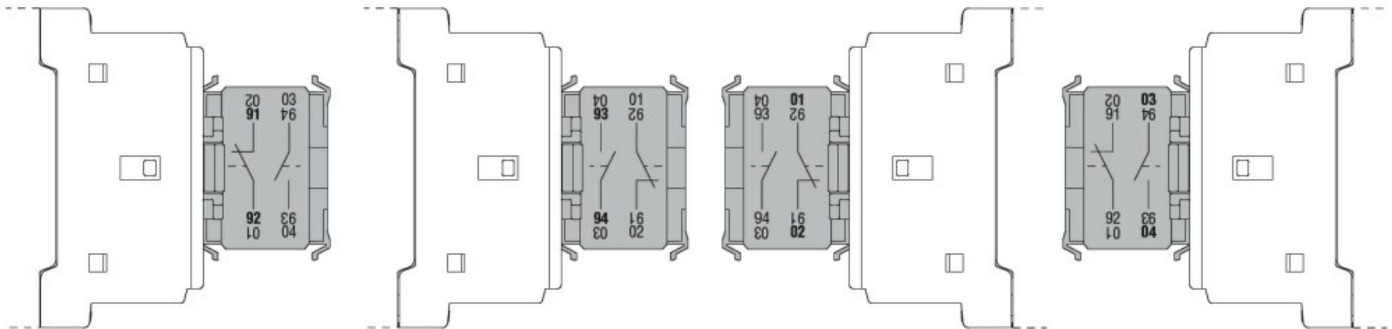

The termination of the G218 auxiliary contact has more than one numbering due to the fact that the block can assume various mounting positions. See the numbering in boldface for a correct interpretation.

Certifications and compliance

Compliance

- CSA C22.2 n° 60947-1
- CSA C22.2 n° 60947-5-1
- IEC/EN 60947-1
- IEC/EN 60947-5-1
- UL 60947-1
- UL 60947-5-1

Certificates

- CCC
- CSA
- cURus
- EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block