



Product designation	Auxiliary contact		
Product type designation	BFX10		

Contact characteristics

Number of poles	Nr.	2	
Rated insulation voltage Ui IEC/EN	V	690	
Rated impulse withstand voltage Uimp	kV	6	
IEC Conventional free air thermal current Ith	A	10	
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	Ibin	7
	max	Ibin	9
Max number of wires simultaneously connectable	Nr.	2	

Conductor section			
AWG/Kcmil			
	max		14
Flexible w/o lug conductor section	min	mm ²	0.75
	max	mm ²	2.5
Flexible c/w lug conductor section	min	mm ²	0.75
	max	mm ²	2.5
Flexible with insulated spade lug conductor section	min	mm ²	0.75
	max	mm ²	2.5

Mechanical features

Operating position			
	normal		On vertical plane
	allowable		Any
Fixing			Front centre mounting
Weight		g	48
Terminals screw			Screw
Conductor section			
AWG/kcmil conductor section			
	max		14
IEC	max	mm ²	1 or 2 x 2.5

Auxiliary contact characteristics

Primary contact characteristics			
Type of contact			1NO+1NC
Thermal current I _{th}	A		10
IEC/EN 60947-5-1 designation			A600 - Q600
Operating current AC15			
	230V	A	3
	400V	A	1.9

	500V	A	1.4
Operating current DC13	24V	A	3
	48V	A	1.5
	60V	A	1.2
	110V	A	0.6
	125V	A	0.55
	220V	A	0.27
	600V	A	0.1

Electrical characteristics

Conductivity	5V 10 mA
UL/CSA and IEC/EN 60947-5-1 designation	A600 Q600
Operating current AC15	


	120V	A	6
	240V	A	3
	480V	A	1.5
	600V	A	1.2

Operating current DC13	12V	A	10
	250V	A	0.27
	440V	A	0.15
	500V	A	0.13


Ambient conditions

Temperature			
Operating temperature			
	min	°C	-50
	max	°C	+70
Storage temperature			
	min	°C	-60
	max	°C	+80
Max altitude	m		3000

Dimensions [mm (in)]

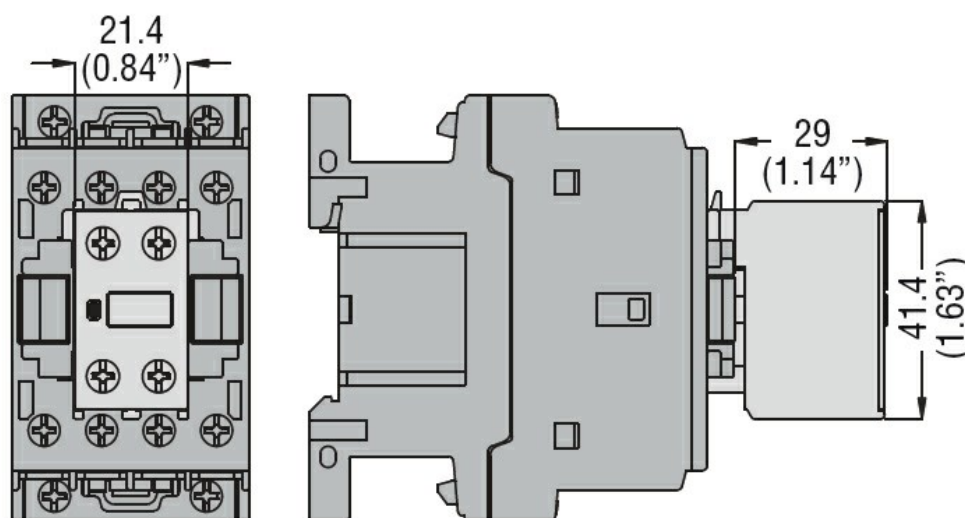

Wiring diagrams

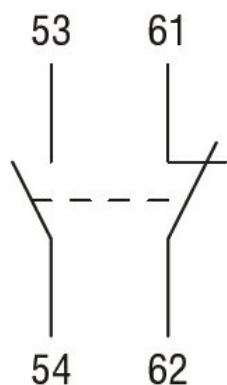

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block