



Contact elements  
- with mountin  
adapter  
LPXE

## Product designation

## Product type designation

### Operations

|                 |        |         |
|-----------------|--------|---------|
| Electrical life | cycles | 1000000 |
|-----------------|--------|---------|

### Mechanical features

|                 |       |              |
|-----------------|-------|--------------|
| Operating force | kg-lb | ≤0.5Kg/1.1lb |
|-----------------|-------|--------------|

|                                     |    |   |
|-------------------------------------|----|---|
| Tightening torque for terminals max | Nm | 1 |
|-------------------------------------|----|---|

|                 |       |
|-----------------|-------|
| Terminals screw | Screw |
|-----------------|-------|

## Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

|                  |          |
|------------------|----------|
| Mounting adapter | LPXAU120 |
|------------------|----------|

|        |   |    |
|--------|---|----|
| Weight | g | 29 |
|--------|---|----|

### Ambient conditions

## Temperature

Operating temperature

min °C -25


max °C +70

Storage temperature

min °C -40

max °C +85

### Wiring diagrams

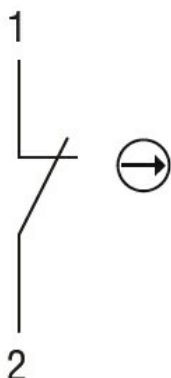

### Certifications and compliance

## Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

## Certificates

CCC

cULus

EAC

RINA

UL

ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology