




Product designation			Rigid SM1 breaker-contactor connections
Product type designation			SM1X
Description			Rigid SM1R breaker - BF09..25A contactor connections.
Accessories for			SM1R...
Operational characteristics			
IEC maximum current (I _{max})		A	25
Mechanical features			
Operating position		normal	Other
Weight		g	35
Dimensions [mm (in)]			

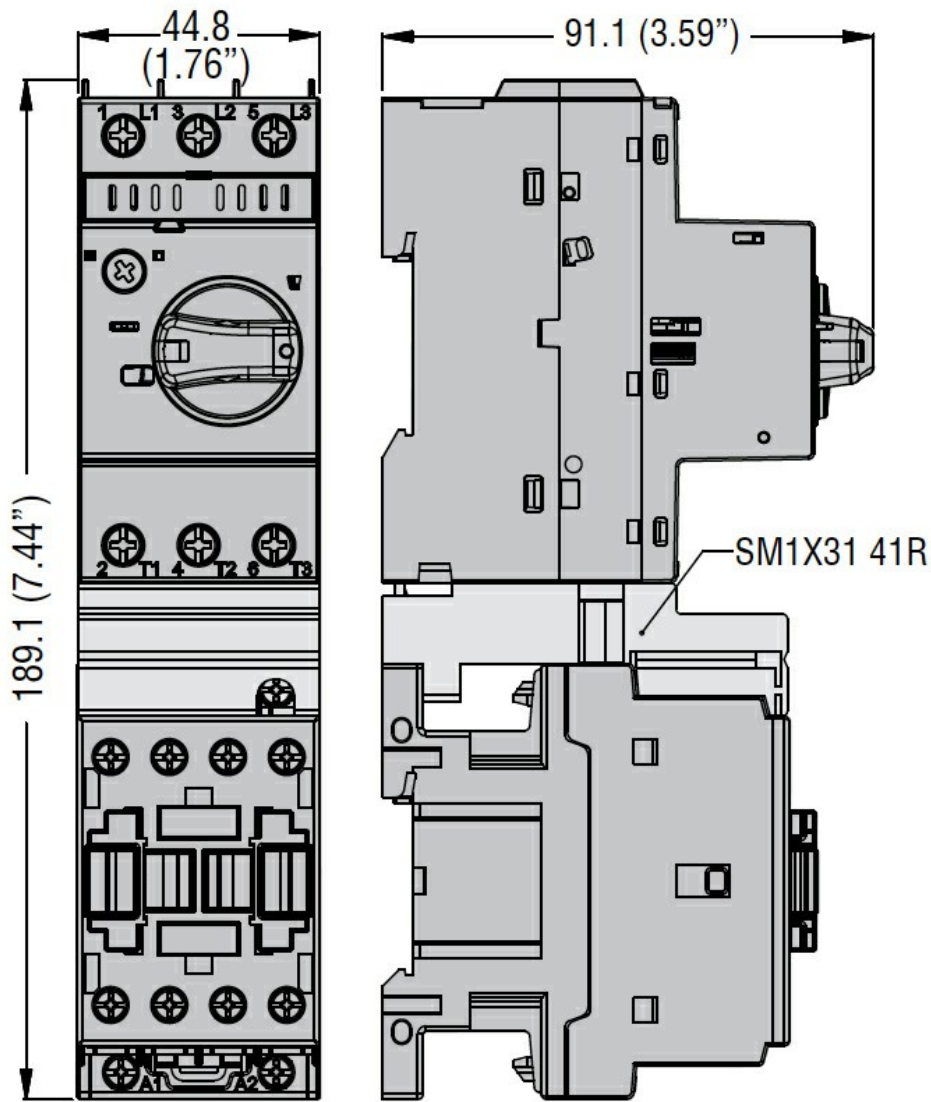

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification