




Product designation			Rigid SM1 breaker-contactor connections
Product type designation			SM1X
Description			Rigid SM1P breaker - BF26..38A contactor connections.
Accessories for			SM1P...
Operational characteristics			
IEC maximum current (I _{max})		A	38
Mechanical features			
Operating position		normal	Other
Weight		g	45
Dimensions [mm (in)]			

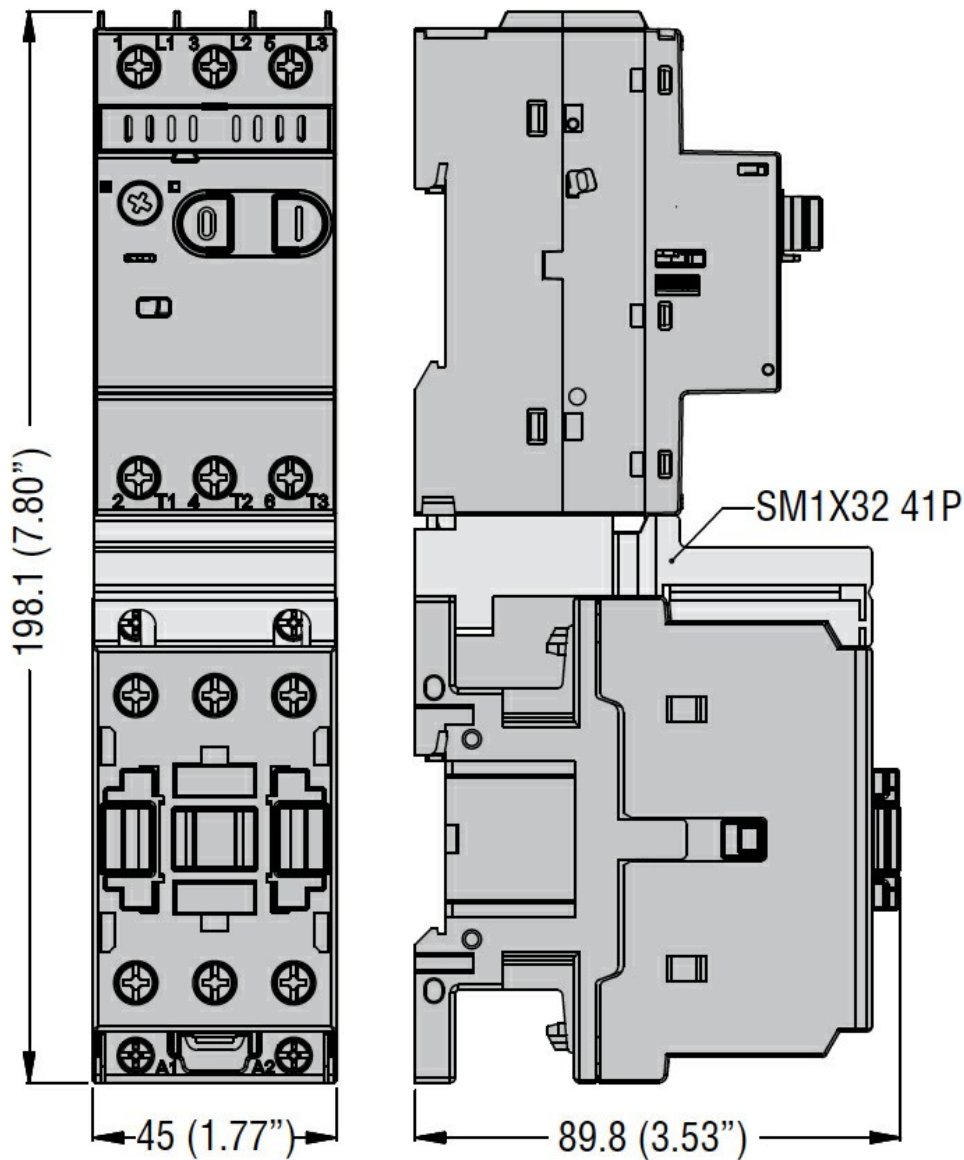

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification