



Monoblock buzzer
- Continuous or
pulse tone
LPCZS

Product designation

Product type designation

General characteristics

Type of positions	Buzzer
Material	Polyamide
IEC degree of protection	IP66, IP67; IP96K on front and IP20 on rear

Electrical characteristics

Rated impulse withstand voltage Uimp	kV	4
Rated frequency	Hz	50-60
Supply voltage (AC)	V	18...30
Supply voltage (DC)	V	18...30

Mechanical features

Tightening torque for terminals max	Nm	0.5
Screwdriver	Flat-head:	0.6x3.5mm/0.02x0.
Conductor section		

AWG/kcmil conductor section

min	24
max	14

IEC

min	mm ²	0.5
max	mm ²	2.5

Weight	g	20
--------	---	----

UL technical data

UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	--------------------------------------

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70


Storage temperature

min	°C	-40
max	°C	+85

Dimensions [mm (in)]

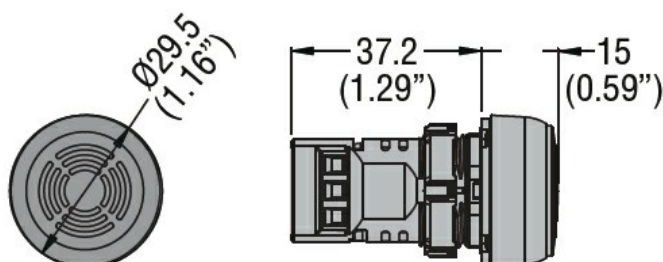

Wiring diagrams

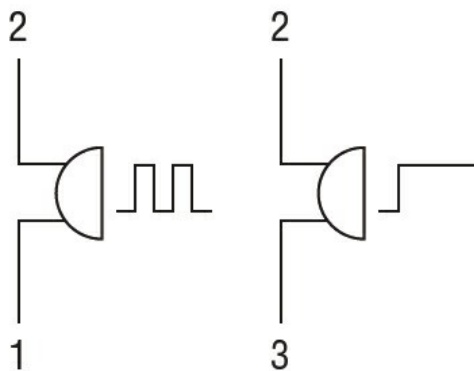

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certificates	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0	EC000130 - Signal horn
----------	---------------------------