


Product designation	Rigid SM1 breaker-contactor connections		
Product type designation	SM1X		
Description	Rigid SM1R breaker - BF09..25D and BF09...25L contactor connections.		
Accessories for	SM1R...		
<b>Operational characteristics</b>			
IEC maximum current (I <sub>max</sub> )	A	25	
<b>Mechanical features</b>			
Operating position	normal		Other
Weight		g	44
<b>Dimensions [mm (in)]</b>			

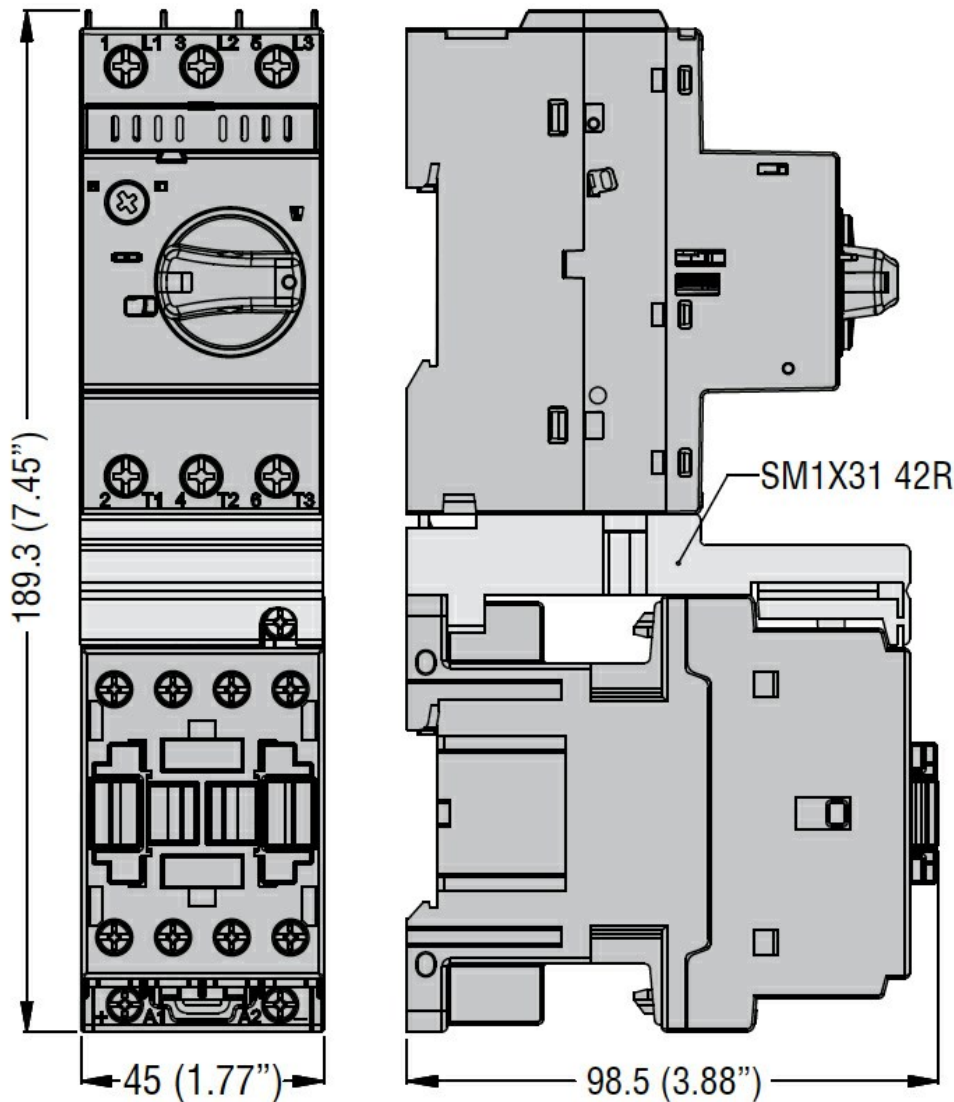

**Certifications and compliance**

Compliance

CSA C22.2 n° 14  
 IEC/EN 60947-1  
 IEC/EN 60947-5-1  
 UL508

Certificates

cULus  
 EAC

**ETIM classification**