



|                          |                                 |
|--------------------------|---------------------------------|
| Product designation      | Miniature circuit breaker (MCB) |
| Product type designation | P1 MB                           |
| Number of poles          | 2P                              |
| Number of DIN modules    | 2                               |
| Compliance               | IEC / UL1077                    |

**Electrical features**

|   |        |         |
|---|--------|---------|
| Rated insulation voltage $U_i$ IEC/EN     | V      | 440     |
| Rated impulse withstand voltage $U_{imp}$ | kV     | 4       |
| Rated operational voltage AC (IEC)        | VAC    | 230/400 |
| Rated operational voltage DC              | VDC    | 80      |
| Rated frequency                           | Hz     | 50/60   |
| Rated current ( $I_n$ )                   | A      | 25      |
| Tripping curve                            |        | B       |
| Short circuit rating (IEC)                | kA     | 10      |
| Electrical life                           | cycles | 10000   |
| Power dissipation per pole max            | W      | 2.13    |

**Ambient conditions**

|                       |     |    |      |
|-----------------------|-----|----|------|
| Operating temperature | min | °C | -40  |
|                       | max | °C | +70  |
| Storage temperature   | min | °C | -40  |
|                       | max | °C | +80  |
| Max altitude          | m   |    | 2000 |


**Mechanical features**

|                                 |           |               |                 |    |
|---------------------------------|-----------|---------------|-----------------|----|
| Operating position              | normal    | Vertical plan |                 |    |
| Fixing                          |           | 35mm DIN rail |                 |    |
| Tightening torque for terminals | min       | Nm            | 1.8             |    |
|                                 | max       | Nm            | 2               |    |
|                                 | min       | lbin          | 16              |    |
|                                 | max       | lbin          | 17.7            |    |
| Terminals tool                  |           | Pz 2          |                 |    |
| Conductor section               | IEC       | min           | mm <sup>2</sup> | 1  |
|                                 |           | max           | mm <sup>2</sup> | 35 |
|                                 | AWG/Kcmil | min           |                 | 14 |
|                                 |           | max           |                 | 6  |
| Mechanical life                 |           | cycles        | 20000           |    |
| Weight                          |           | g             | 230             |    |
| Frontal IP degree               |           |               | IP20            |    |


Pollution degree

2

Dimensions [mm (in)]

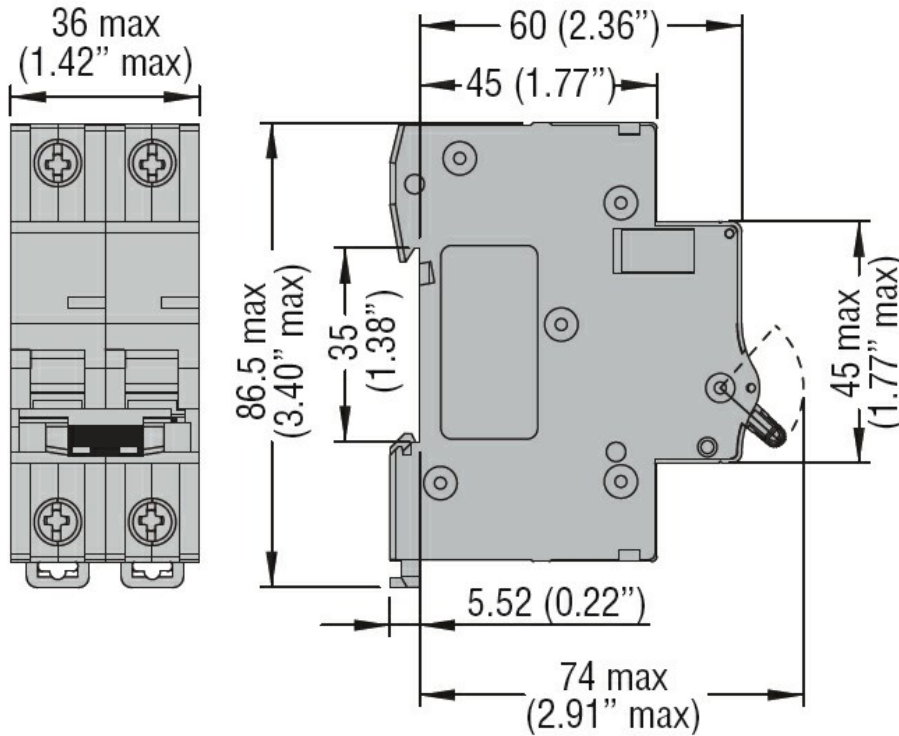

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°235. UR "UL Recognized" per Canada e USA.

IEC/EN 60898-1

IEC/EN 60947-2

UL 1077

Certifications

cURus

EAC

TÜV-Rheinland

ETIM classification

ETIM 8.0

EC000042 -  
 Miniature circuit  
 breaker (MCB)