



Product designation  
Product type designation

Power contactor  
BF115

**Contact characteristics**

|  |   |        |
|--|---|--------|
| Number of poles  | Nr.   | 4      |
| Rated insulation voltage U <sub>i</sub> IEC/EN                                   | V   | 1000   |
| Rated impulse withstand voltage U <sub>imp</sub>                                 | kV  | 8      |
| Operational frequency  | min   | Hz 25  |
|  | max   | Hz 400 |
| IEC Conventional free air thermal current I <sub>th</sub>                        | A   | 160    |
| Operational current I <sub>e</sub>   | AC-1 (≤40°C)  | A 160  |
|  | AC-1 (≤55°C)  | A 130  |
|  | AC-1 (≤70°C)  | A 115  |
|  | AC-3 (≤440V ≤55°C)  | A 115  |
|  | AC-4 (400V)   | A 54   |
| IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 1 poles in series      | ≤24V  | A 160  |
|  | 48V   | A 160  |
|  | 75V   | A 120  |
|  | 110V  | A 10   |
|  | 220V  | A –    |
|  | IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 2 poles in series | ≤24V   |
| 48V  |   | A 160  |
| 75V  |   | A 160  |
| 110V   |   | A 130  |
| 220V   |   | A 14   |
| IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 3 poles in series      |   | ≤24V   |
|  | 48V   | A 160  |
|  | 75V   | A 160  |
|  | 110V  | A 140  |
|  | 220V  | A 145  |
|  | IEC max current I <sub>e</sub> in DC1 with L/R ≤ 1ms with 4 poles in series | ≤24V   |
| 48V  |   | A 160  |
| 75V  |   | A 160  |
| 110V   |   | A 160  |
| 220V   |   | A 160  |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 1 poles in series |   | ≤24V   |
|  | 48V   | A 50   |
|  | 75V   | A 40   |
|  | 110V  | A 6    |

|  |                 |                  |            |
|--|-----------------|------------------|------------|
|  | 220V            | A                | –          |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | ≤24V            | A                | 160        |
|  | 48V             | A                | 72         |
|  | 75V             | A                | 65         |
|  | 110V            | A                | 65         |
|  | 220V            | A                | 7          |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | ≤24V            | A                | 160        |
|  | 48V             | A                | 150        |
|  | 75V             | A                | 100        |
|  | 110V            | A                | 100        |
|  | 220V            | A                | 92         |
| IEC max current I <sub>e</sub> in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | ≤24V            | A                | 160        |
|  | 48V             | A                | 120        |
|  | 75V             | A                | 120        |
|  | 110V            | A                | 125        |
|  | 220V            | A                | 115        |
| Short-time allowable current for 10s (IEC/EN60947-1)                             |                 | A                | 920        |
| Protection fuse  | gG (IEC)        | A                | 200        |
|  | aM (IEC)        | A                | 125        |
| Making capacity (RMS value)  |                 | A                | 1500       |
| Breaking capacity at voltage   | 440V            | A                | 1200       |
|  | 500V            | A                | 850        |
|  | 690V            | A                | 905        |
| Resistance per pole (average value)  |                 | mΩ               | 0.45       |
| Power dissipation per pole (average value)                                       | I <sub>th</sub> | W                | 11.5       |
|  | AC3             | W                | 6.0        |
| Tightening torque for terminals  | min             | Nm               | 6          |
|  | max             | Nm               | 7          |
|  | min             | I <sub>bin</sub> | 4.4        |
|  | max             | I <sub>bin</sub> | 5.2        |
| Tightening torque for coil terminal  | min             | Nm               | 0.8        |
|  | max             | Nm               | 1          |
|  | min             | I <sub>bin</sub> | 0.59       |
|  | max             | I <sub>bin</sub> | 0.74       |
| Conductor section  | AWG/Kcmil       |                  |            |
|  | max             |                  | 2/0        |
| Flexible w/o lug conductor section   | min             | mm <sup>2</sup>  | 1.5        |
|  | max             | mm <sup>2</sup>  | 70         |
| Flexible c/w lug conductor section   | min             | mm <sup>2</sup>  | 1.5        |
|  | max             | mm <sup>2</sup>  | 70         |
| Power terminal protection according to IEC/EN 60529                              |                 |                  | IP20 front |

### Mechanical features

Operating position

|        |                  |                       |
|--------|------------------|-----------------------|
|        | normal allowable | Vertical plan ±30°    |
| Fixing |                  | Screw / DIN rail 35mm |
| Weight | g                | 2420                  |

|                   |                             |     |     |
|-------------------|-----------------------------|-----|-----|
| Conductor section | AWG/kcmil conductor section | max | 2/0 |
|-------------------|-----------------------------|-----|-----|

**Operations**

|                 |        |          |
|-----------------|--------|----------|
| Mechanical life | cycles | 15000000 |
|-----------------|--------|----------|

|                 |        |         |
|-----------------|--------|---------|
| Electrical life | cycles | 1200000 |
|-----------------|--------|---------|

**AC coil operating**

|                             |   |     |
|-----------------------------|---|-----|
| Rated AC voltage at 50/60Hz | V | 230 |
|-----------------------------|---|-----|

|                      |                                 |     |     |     |
|----------------------|---------------------------------|-----|-----|-----|
| AC operating voltage |                                 |     |     |     |
|                      | of 50/60Hz coil powered at 50Hz |     |     |     |
|                      | pick-up                         | min | %Us | 80  |
|                      |                                 | max | %Us | 110 |
|                      | drop-out                        | min | %Us | 20  |
|                      |                                 | max | %Us | 55  |
|                      | of 50/60Hz coil powered at 60Hz |     |     |     |
|                      | pick-up                         | min | %Us | 85  |
|                      |                                 | max | %Us | 110 |
|                      | drop-out                        | min | %Us | 40  |
|                      |                                 | max | %Us | 55  |

|                                     |                                 |         |    |     |
|-------------------------------------|---------------------------------|---------|----|-----|
| AC average coil consumption at 20°C |                                 |         |    |     |
|                                     | of 50/60Hz coil powered at 50Hz |         |    |     |
|                                     |                                 | in-rush | VA | 300 |
|                                     |                                 | holding | VA | 20  |
|                                     | of 50/60Hz coil powered at 60Hz |         |    |     |
|                                     |                                 | in-rush | VA | 275 |
|                                     |                                 | holding | VA | 17  |
|                                     | of 60Hz coil powered at 60Hz    |         |    |     |
|                                     |                                 | in-rush | VA | 300 |
|                                     |                                 | holding | VA | 20  |

**Max cycles frequency**

|                      |          |      |
|----------------------|----------|------|
| Mechanical operation | cycles/h | 1500 |
|----------------------|----------|------|

**Operating times**

|                             |            |     |    |    |
|-----------------------------|------------|-----|----|----|
| Average time for Us control |            |     |    |    |
|                             | in AC      |     |    |    |
|                             | Closing NO | min | ms | 16 |
|                             |            | max | ms | 32 |
|                             | Opening NO | min | ms | 9  |
|                             |            | max | ms | 24 |

**UL technical data**

|             |           |            |   |     |
|-------------|-----------|------------|---|-----|
| General USE | Contactor | AC current | A | 165 |
|-------------|-----------|------------|---|-----|

Short-circuit protection fuse, 600V  
High fault

|                       |    |     |
|-----------------------|----|-----|
| Short circuit current | kA | 100 |
| Fuse rating           | A  | 200 |
| Fuse class            |    | J   |

Standard fault

|                       |    |     |
|-----------------------|----|-----|
| Short circuit current | kA | 10  |
| Fuse rating           | A  | 250 |
| Fuse class            |    | RK5 |

**Ambient conditions**

Temperature

Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -50 |
| max | °C | 70  |


Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -60 |
| max | °C | +80 |


Max altitude

|   |      |
|---|------|
| m | 3000 |
|---|------|

**Dimensions [mm (in)]**

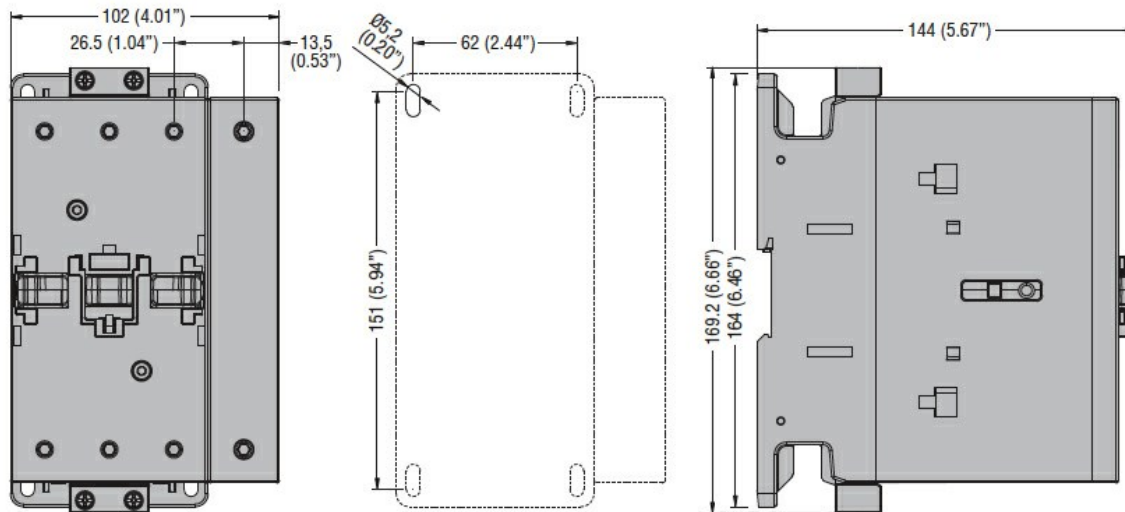

**Wiring diagrams**

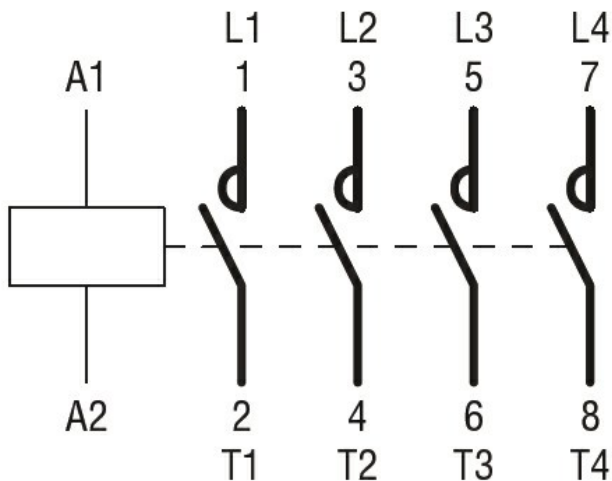

**Certifications and compliance**

Compliance

CSA C22.2 n° 60947-1

---

CSA C22.2 n° 60947-4-1

---

IEC/EN/BS 60947-1

---

IEC/EN/BS 60947-4-1

---

UL 60947-1

---

UL 60947-4-1

Certificates

---

CCC

---

cULus

---

EAC

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching