


PNOZ X10 110-120VAC 6n/o 4n/c 3LED

774703

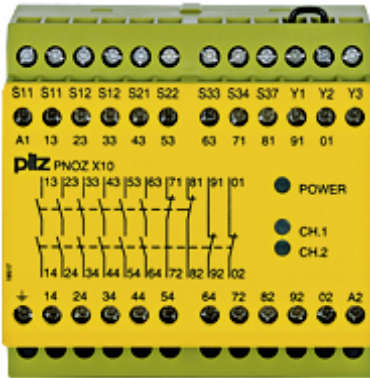

Safety relay (standalone), inputs: 1/2-channel wiring with/without detection of shorts across contacts, outputs: 6 N/O, 4 N/C, automatic/monitored start, UB = 110 - 120 V AC, width: 90 mm, screw terminals integrated, monitoring of E-STOP, safety gates, light curtain. This product has been discontinued. The following products are fully compatible in function: 750134 751134 However, it should be checked for the respective application whether all necessary framework conditions and parameters are also fulfilled for the intended use.

Technical details

General data	
Approval:	CCC, CE, UKCA, cULus Listed, TÜV, EAC (Eurasian)
Technical data	
Electrical data	
Supply voltage (V):	110 - 110 V
Type of supply voltage U1:	AC
Power consumption AC:	10 VA
Inputs	
Number of inputs:	2
Semiconductor outputs	
Number of semicond. outputs:	0
Relay outputs	
Utilisation cat. AC/DC1 stand.:	EN 60947-4-1
Voltage AC1 safety cont.:	240 V
Max. current AC1 safety cont.:	8 A
Voltage DC1 safety cont.:	24 V
Max. current DC1 safety cont.:	8 A
Utilisation cat. AC15/DC13sta.:	EN 60947-5-1
Voltage AC15 safety cont.:	230 V
Max. current AC15 safety cont.:	5 A

Voltage DC13 safety cont.:	24 V
Safety contacts: AC at UL:	240 VAC G. P.
Safety contacts: pilot duty:	B300, R300
Relay contact material:	AgSnO2
Addit. contact details relay:	+ 0.2 µm Au
Environmental data	
Climatic suitability to ...:	EN 60068-2-78
Ambient temperature:	-10 - -10 °C
Humidity rating:	93 % r. h. at 40 °C
Condensation permitted?:	unzulässig
EMC to standard ...:	EN 60947-5-1, EN 61000-6-2, EN 61326-3-1
Vibration to standard ...:	EN 60068-2-6
Clearance & creepage dist. to:	EN 60947-1
Overvoltage category:	III / II
Pollution degree clear.&creep.:	2
Mechanical data	
Mounting position:	any
Housing material front plate:	ABS UL 94 V0
Housing material upper part:	PPO UL 94 V1
Connection terminal:	Screw terminal
Terminal style:	fixed
Flex. cond. c/s AWG info:	24 - 10 AWG
Height dimension:	87 mm
Width dimension:	90 mm
Depth dimension:	121 mm
Net weight:	720 g
Gross weight:	730 g
Environment	
REACH compliance:	contains min. 1 SVHC-substance

WEEE klassifikation (08/2018):	5 devices (feed size < 50cm)
Commercial data	
Harmonized System Code:	85364900
UNSPSC 25:	39122331
EAN-Code:	4046548010497
ECLASS version:	ECLASS-13
ECLASS Reference Feature:	27371819
ETIM Version:	ETIM-9.0
ETIM Reference Group:	EG000019
ETIM Reference Feature:	EC001449
Volume:	1.046 dm3