


TS 32X15/LL 2M/ST/ZN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

| | |
|------------|--|
| Version | Terminal rail, with slot, Accessories, 33 x 15 x 2000 mm, Slit width: 5.20 mm, Slit length: 25.00 mm, Steel, galvanic zinc plated and passivated |
| Order No. | 0514400000 |
| Type | TS 32X15/LL 2M/ST/ZN |
| GTIN (EAN) | 4008190086152 |
| Qty. | 2 m |

Creation date 09 July 2024 16:23:08 CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

TS 32X15/LL 2M/ST/ZN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|----------|-----------------|------------|
| Depth | 15 mm | Depth (inches) | 0.591 inch |
| Height | 33 mm | Height (inches) | 1.299 inch |
| Width | 2,000 mm | Width (inches) | 78.74 inch |
| Net weight | 667 g | | |

Mounting rail

| | | | |
|--|-------------------------------------|----------|--|
| Drill-hole diameter | 5.2 mm | | |
| Installation advice | Direct mounting | | |
| Length of the terminal rail | nominal | 2,000 mm | |
| | max. | 2,000 mm | |
| | min. | 0 mm | |
| Material | Steel | | |
| Pre-punched mounting rail | Yes | | |
| Short circuit strength corresponds to E-Cu wire | 35 mm ² | | |
| Short-time withstand current per second according to IEC 60947-7-2 | 4.2 kA | | |
| Slit gap | 11 mm | | |
| Slit gap | | | |
| Slit length | 25 mm | | |
| Slit length | | | |
| Slit width | 5.2 mm | | |
| Slit width | | | |
| Slotted drill holes | Yes | | |
| Solder eyelet hole diameter (D) | 5.2 mm | | |
| Spacing of holes, centre-to-centre | 36 mm | | |
| Standards | DIN EN 60715 | | |
| Surface finish | galvanic zinc plated and passivated | | |
| Thickness | 1.5 mm | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001285 | ETIM 7.0 | EC001285 |
| ETIM 8.0 | EC001285 | ETIM 9.0 | EC001285 |
| ECLASS 9.0 | 27-40-06-02 | ECLASS 9.1 | 27-40-06-02 |
| ECLASS 10.0 | 27-40-06-02 | ECLASS 11.0 | 27-40-06-02 |
| ECLASS 12.0 | 27-40-06-02 | ECLASS 13.0 | 27-40-06-02 |

Environmental Product Compliance

REACH SVHC /

Approvals

ROHS Conform

Downloads

| | |
|--------------------|--|
| Engineering Data | CAD data – STEP |
| Engineering Data | Zuken E3.S |
| User Documentation | Storage Conditions Terminal Blocks |
| Catalogues | Catalogues in PDF-format |
| Brochures | |

Creation date 09 July 2024 16:23:08 CEST

Catalogue status 29.06.2024 / We reserve the right to make technical changes.

Data sheet



TS 32X15/LL 2M/ST/ZN

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Product image

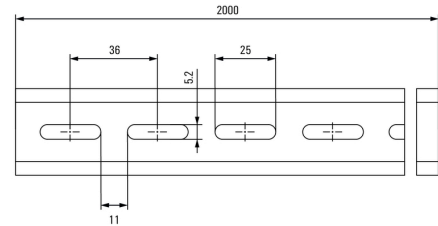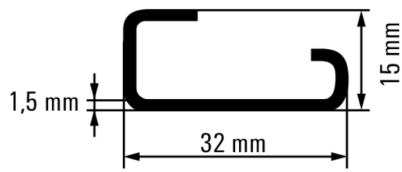

Similar to illustration