

# ARCA 303021No MP



Sample image

**Order symbol :** ARCA 303021No MP

**Product nr :** 8120005N

UL Code : UL508A

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the long side

**EAN :** 6418074086631

**El. number :**


- Finland : 3424588
- Denmark : 8212097560

**Including :** Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.



ARCA IEC DRS

ARCA IEC IDS

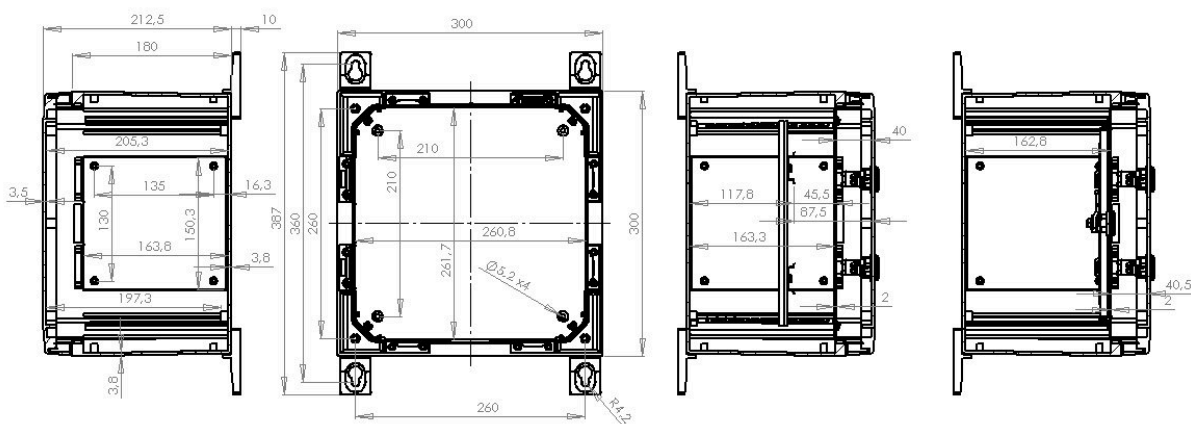

<b>Dimensions :</b>	<b>Height</b>	<b>Width</b>	<b>Depth</b>
mm :	300	300	210
inch :	11.81	11.81	8.27

#### **Materials :**

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

#### **Temperatures :**

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

#### **Accessories :**

MPX ARCA 3030	Mounting plate (250x250 mm) (250 x 250 x 15)
MPMP ARCA 3030	Mounting plate multiperforated (250x250x2 mm - ø3.6 mm) (250 x 250 x 2)
MPS ARCA 3030	Mounting plate (250x250x2 mm) (250 x 250 x 2)
IDS ARCA 3030	Inner door set (280 x 280 x 30)
MPP ARCA 3030	Mounting plate perforated (250x250x2 mm - 26x11 mm) (250 x 250 x 2)
DRS ARCA 303021	DIN rail frame set (280 x 280 x 30)
DSP ARCA VLS	Door stopper ARCA, vertical, left, small (15 x 104 x 16)
DSP ARCA VRS	Door stopper ARCA, vertical, right, small (15 x 104 x 16)
PMK ARCA 30	PoleMounting kit, for pole ø100-300mm (385 x 285 x 35)

#### **Ratings :**

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 746C
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960C
UL Type	NEMA__1_4_4X_12_13