


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 25 bar
Working Pressure (max): 363 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MC16

Taper Elbow Fitting, male

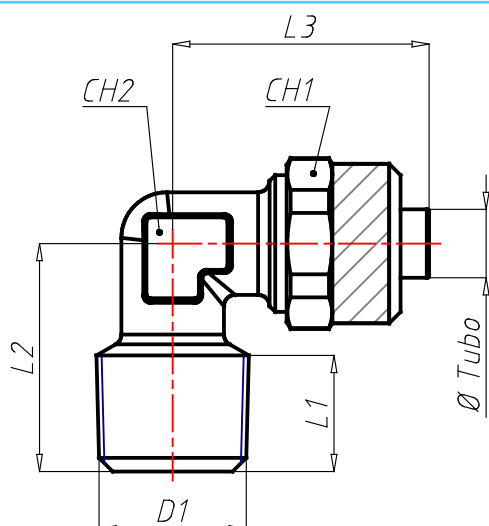

MC16

3D

NAME	CODE	TYPE	VAR_E_TUBO	VAR_I_TUBO	D1	L1	L1IN	L2	L2IN	L3	L3IN	CH1	CH2	G	OZ	WTF	WPP	NN
02060010	02060010	MC16 4 04 M5		2,5	M5x0,8	5	.197	15,5	.610	20	.787	7	9	10,4	.367	-40 ÷ 302	363	0
02060011	02060011	MC16 4 04 18		2,5	R1/8	7,5	.295	17	.669	20	.787	7	9	10,7	.377	-40 ÷ 302	363	0
02060031	02060031	MC16 6 06 18		4	R1/8	8	.315	17	.669	22,5	.886	12	8	16,2	.571	-40 ÷ 302	363	0
02060032	02060032	MC16 6 06 14		4	R1/4	11	.433	20	.787	22,5	.886	12	10	21,6	.762	-40 ÷ 302	363	0
02060033	02060033	MC16 6 06 38		4	R3/8	11,5	.453	22,5	.886	23,5	.925	12	11	30,3	1.069	-40 ÷ 302	363	0

02060041	02060041	MC16 08 18	8	6	R1/8	8	.315	17	.669	22,5	.886	14	10	19,4	.684	-40 ÷ 302	363	0
02060042	02060042	MC16 08 14	8	6	R1/4	11	.433	20	.787	22,5	.886	14	10	23,3	.822	-40 ÷ 302	363	0
02060043	02060043	MC16 08 38	8	6	R3/8	11,5	.453	22,5	.886	24	.945	14	11	31	1.093	-40 ÷ 302	363	0
02060051	02060051	MC16 10 18	10	8	R1/8	8	.315	18,5	.728	25,5	1.004	16	11	27,6	.974	-40 ÷ 302	363	0
02060052	02060052	MC16 10 14	10	8	R1/4	11	.433	21,5	.846	25,5	1.004	16	11	30,5	1.076	-40 ÷ 302	363	0
02060053	02060053	MC16 10 38	10	8	R3/8	11,5	.453	22,5	.886	25,5	1.004	16	11	34,7	1.224	-40 ÷ 302	363	0
02060063	02060063	MC16 12 38	12	10	R3/8	11,5	.453	24,5	.965	30	1.181	18	14	46	1.623	-40 ÷ 302	363	0
02060064	02060064	MC16 12 12	12	10	R1/2	14	.551	28	1.102	30,5	1.201	18	17	66,5	2.346	-40 ÷ 302	363	0
02060084	02060084	MC16 15 12	15	12,5	R1/2	14	.551	28	1.102	34	1.339	22	17	69,6	2.455	-40 ÷ 302	363	0
02069021	02069021	MC16 05 18	5	3	R1/8	8	.315	17	.669	21,5	.846	8	8	10,8	.381	-40 ÷ 302	363	0