

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe coupling relay with force-guided contacts, 5 N/O contacts, 1 N/C contact, plug-in screw terminal block, width: 22.5 mm

Your advantages

- Up to Cat. 1/PL c in accordance with EN ISO 13849-1, SIL 1 in accordance with IEC 61508
- Safe readback due to force-guided signal contact in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- 1 or 2-channel control
- 5 enabling current paths, 1 confirmation current path

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Product properties

| | |
|-------------------------|--|
| Product type | Coupling relay |
| Product family | PSRclassic |
| Application | Safe switch off |
| | High demand |
| | Low demand |
| Mechanical service life | 10x 10 ⁶ cycles |
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |


Data management status

| | |
|------------------|----|
| Article revision | 06 |
|------------------|----|

Times

| | |
|--------------|-------------------|
| Restart time | < 1 s (Boot time) |
|--------------|-------------------|

Electrical properties

| | |
|---|--|
| Maximum power dissipation for nominal condition | 8.56 W (at $U_B = 26.4$ V DC, $U_S = 24$ V, $I_S = 47$ mA, $n = 1$, $I_L^2 = 72$ A ² , $R_{\text{contact}} = 0.1 \Omega$ ) |
| Nominal operating mode | 100% operating factor |

Air clearances and creepage distances between the power circuits

| | |
|--------------------------------|--|
| Rated insulation voltage | 250 V |
| | 250 V |
| Rated surge voltage/insulation | 4 kV / basic isolation (safe isolation, reinforced isolation and 6 kV between A1/A2, 53/54, 71/72 and 13/14, 23/24, 33/34, 43/44.) |

Input data

General

| | |
|--|--|
| Rated control circuit supply voltage U_S | 24 V AC/DC -15 % / +10 % |
| Power consumption at U_S | typ. 1.2 W |
| Rated control supply current I_S | typ. 47 mA |
| Input voltage range | 20.4 V AC/DC ... 26.4 V AC/DC |
| Inrush current | typ. 350 mA DC ($\Delta t < 1 \mu\text{s}$ at U_S) |
| | typ. 350 mA AC ($\Delta t = 2$ ms at U_S) |
| Typ. starting time with U_S | typ. 20 ms (when controlled via A1) |
| Typical release time | typ. 20 ms (when controlled via A1) |
| Recovery time | < 500 ms |
| Maximum switching frequency | 0.5 Hz |

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

| | |
|---------------------------|----------------------------|
| Protective circuit | Surge protection; Varistor |
| Operating voltage display | 1 x green LED |

Output data

| | |
|---|--|
| Contact switching type | 5 enabling current paths |
| | 1 confirmation current path |
| Contact material | AgSnO ₂ |
| Maximum switching voltage | 230 V AC/DC (Observe the load curve) |
| Minimum switching voltage | 5 V AC/DC |
| Limiting continuous current | 6 A (N/O contact) |
| | 6 A (N/C contact) |
| Maximum inrush current | 6 A |
| Inrush current, minimum | 10 mA |
| Sq. Total current | 72 A ² |
| Interrupting rating (ohmic load) max. | 144 W (N/O contact, 24 V DC, τ = 0 ms) |
| | 288 W (N/O contact, 48 V DC, τ = 0 ms) |
| | 240 W (N/O contact, 60 V DC, τ = 0 ms) |
| | 110 W (N/O contact, 110 V DC, τ = 0 ms) |
| | 88 W (N/O contact, 220 V DC, τ = 0 ms) |
| | 1380 VA (N/O contact, 230 V AC, τ = 0 ms) |
| Maximum interrupting rating (inductive load) | 42 W (N/O contact, 24 V DC, τ = 40 ms) |
| | 42 W (N/O contact, 48 V DC, τ = 40 ms) |
| | 42 W (N/O contact, 60 V DC, τ = 40 ms) |
| | 42 W (N/O contact, 110 V DC, τ = 40 ms) |
| | 42 W (N/O contact, 220 V DC, τ = 40 ms) |
| Switching capacity | min. 50 mW |
| Switching capacity in accordance with IEC 60947-5-1 | 3 A (24 V (DC13)) |
| | 3 A (230 V (AC 15)) |
| Switching capacity (360/h cycles) | 4 A (24 V (DC13)) |
| | 4 A (230 V (AC15)) |
| Output fuse | 10 A gL/gG (N/O contact) |
| | 4 A gL/gG (N/O contact, for low-demand applications) |
| | 6 A gL/gG (N/C contact) |

Connection data

Connection technology

| | |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

Conductor connection

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Conductor cross section rigid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 12 |
| Stripping length | 7 mm |

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

| | |
|-------------------|--------|
| Screw thread | M3 |
| Tightening torque | 0.6 Nm |

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 114.5 mm |
| Depth | 99 mm |

Material specifications

| | |
|------------------|-------------------|
| Color (Housing) | yellow (RAL 1018) |
| Housing material | Polyamide |

Characteristics

Safety data

| | |
|---------------|---|
| Stop category | 0 |
|---------------|---|

Safety data: EN ISO 13849

| | |
|------------------------|---|
| Category | 1 |
| Performance level (PL) | c |

Safety data: IEC 61508 - High demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 1 |
|------------------------------|---|

Safety data: IEC 61508 - Low demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 1 |
|------------------------------|---|

Safety data

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 1 |
|------------------------------|---|

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Maximum altitude | max. 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock | 15g (In the event of stress caused by shock, contact reactions are possible for up to 2 ms.) |
| Vibration (operation) | 10 Hz ... 150 Hz, 2g (In the event of stress caused by vibration, contact reactions are possible for up to 1 ms.) |

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

Standards and regulations

Air clearances and creepage distances between the power circuits

| | |
|-----------------------|--------------|
| Standards/regulations | DIN EN 50178 |
|-----------------------|--------------|

Mounting

| | |
|-------------------|------------------------|
| Mounting type | DIN rail mounting |
| Mounting position | vertical or horizontal |

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>


Drawings

Application drawing



Reliable signal exchange between two systems with confirmation function.

Block diagram

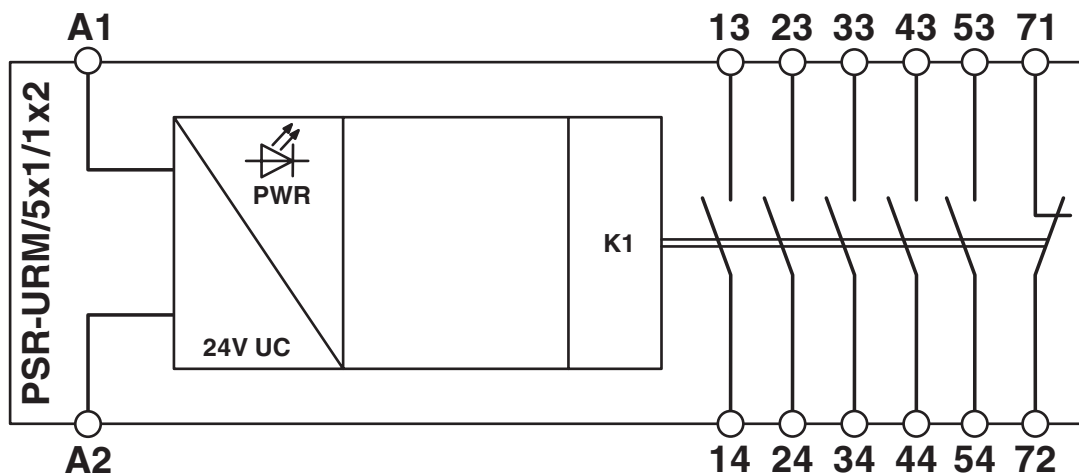

Block diagram

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2981952>



EAC

Approval ID: TR_TS_D_00573_c



Functional Safety

Approval ID: 44-780-15124312



Functional Safety

Approval ID: 44-205-15124312



cULus Listed

Approval ID: E140324

PSR-SCP- 24UC/URM/5X1/1X2 - Coupling relay



2981952

<https://www.phoenixcontact.com/gb/products/2981952>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27371819 |
| ECLASS-13.0 | 27371819 |
| ECLASS-12.0 | 27371819 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

2981952

<https://www.phoenixcontact.com/gb/products/2981952>

Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 003ff684-57d0-4e3e-87ba-5bd5dc623931 |

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk