


Stopping Plug Polyamide. Type: CPM



Other Certificates



Applications

The CPM stopping plug is designed to seal unused entries on electrical equipment in hazardous areas, maintaining Ex eb, Ex tb equipment protection types.

When installed the CPM stopping plug protects against moisture, dusts and other contaminants entering electrical apparatus, permitting the safe introduction of future wiring.

CPM stopping plug offers three tightening solutions from the outside: Allen key, flat head screwdriver or a spanner/wrench.

The design provides protection against excessive tightening during assembly and a collar that prevents tools from marking the face of the mating surface when tightening.

Made of black polyamide, the CPM stopping plug incorporates a sealing lip which maintains IP66 without the need for an additional seal.

Alternatively, a version with a EPDM O-ring can achieve IP68 (40 m for 30 min).

Features

- Certified ATEX, IECEx, NEC & CEC
- High level of ingress protection to IP66, IP67 & IP68
- Wide variety of ISO and PG threads

Technical characteristics

Stopping plug polyamide type CPM

Approvals


Applications	Safe to use in zones 1, 2, 21 and 22
Protection Class	Ex II 2G - Ex eb IIC Gb Ex II 2D - Ex tb IIIC Db IP66
ATEX Certificate	UKCA CML 23 UKEX
IECEx Certificate	IECEx INE22.0008X
UKCA Certificate	UKCA CML 23 UKEX

NEC / CEC


NEC Application & Protection Class	Class 1 Zone 1 AEx eb IIC Gb, Class 2 Zone 21 AEx tb IIIC Db
NEC Application & Protection Class	Zone 1, Ex eb IIC Gb X, Zone 21, Ex tb IIIC Db X
NEC / CEC Certificate	UL E534172 (M20 to M63 only)
Operating temperature	-30°C to +90°C

IP Rating	IP66 without O-Ring fitted to flat surface (Ra max = 1,6 µm) Standard Option IP67 / IP68 with EPDM O-ring or rough surface (Ra max = 6,3 µm)
Materials	Stopping Plug: Polyamide UL94 HB O-Ring: EPDM

Stopping Plug Polyamide. Type: CPM



Dimensions

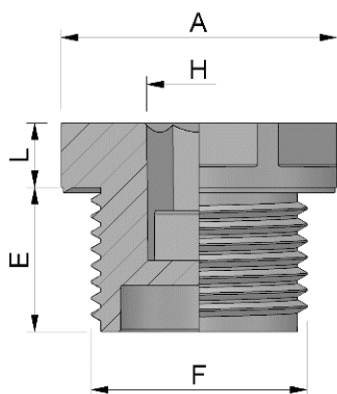

THREAD (F)	HEX ALLEN KEY (H)	FLAT KEY (A)	LENGTH OF THREAD (E)	HEIGHT OF HEAD (L)
M16	6	19.0	13.2	5.9
M20	8	23.0	13.2	5.9
M25	10	28.0	13.2	6.9
M32	12	36.0	13.1	7.4
M40	12	44.0	13.1	7.4
M50	12	54.0	13.3	7.9
M63	14	67.0	15.0	8.4

THREAD (F)	HEX ALLEN KEY (H)	FLAT KEY (A)	LENGTH OF THREAD (E)	HEIGHT OF HEAD (L)
Pg9	5	19.0	10.0	5.9
Pg11	5	22.0	10.5	5.9
Pg13.5	8	24.0	9.2	5.9
Pg16	10	27.0	10.2	6.9
Pg21	12	32.0	10.7	7.4
Pg29	12	40.0	13.1	7.4
Pg36	12	52.0	13.2	7.9
Pg42	12	59.0	15.0	7.9

Standard order codes

ISO Metric

PLUG ONLY IP66 - FLAT SURFACE		PLUG + O RING IP 67 / 68 OR ROUGH SURFACE	
SIZE	REFERENCE	REFERENCE	
M16	CPM1100E	CPM1100EU	
M20	CPM1200E	CPM1200EU	
M25	CPM1300E	CPM1300EU	
M32	CPM1400E	CPM1400EU	
M40	CPM1500E	CPM1500EU	
M50	CPM1600E	CPM1600EU	
M63	CPM1700E	CPM1700EU	

Pg

PLUG ONLY IP66 - FLAT SURFACE		PLUG + O RING IP68 OR ROUGH SURFACE	
SIZE	REFERENCE	REFERENCE	
Pg9	CPM2100E	CPM2100EU	
Pg11	CPM2200E	CPM2200EU	
Pg13,5	CPM2300E	CPM2300EU	
Pg16	CPM2400E	CPM2400EU	
Pg21	CPM2500E	CPM2500EU	
Pg29	CPM2600E	CPM2600EU	
Pg36	CPM2700E	CPM2700EU	
Pg42	CPM2800E	CPM2800EU	

All dimensions in mm.