

# PC 1919 18 G

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** PC 1919 18 G

**Product nr :** 5330369

**UL Name :** UL PC 1919 18 G

**Description :** Enclosure, PC



**Remarks :** Grey cover

**EAN :** 6418074005427

**El. number :**

- Finland : 3423703
- Denmark : 8212051522
- Sweden : 2539408

**Including :** Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

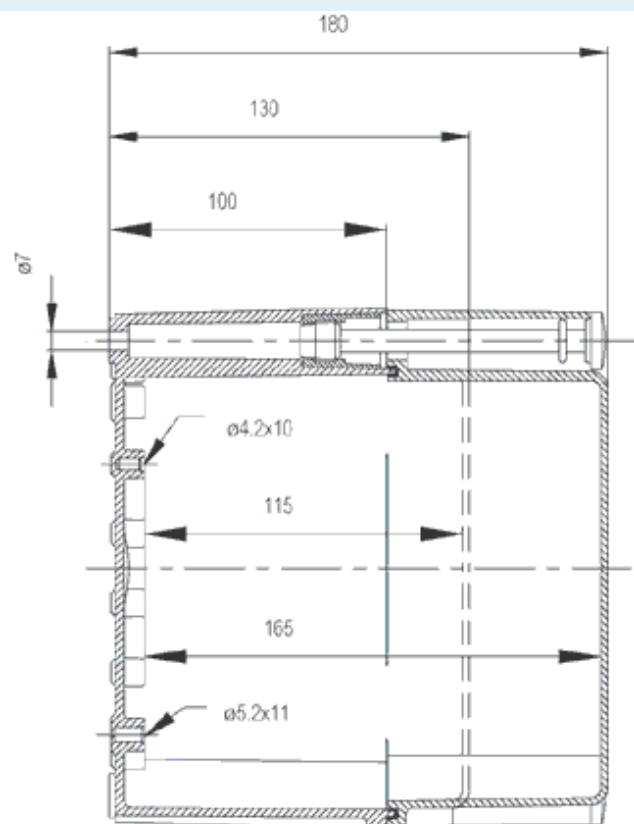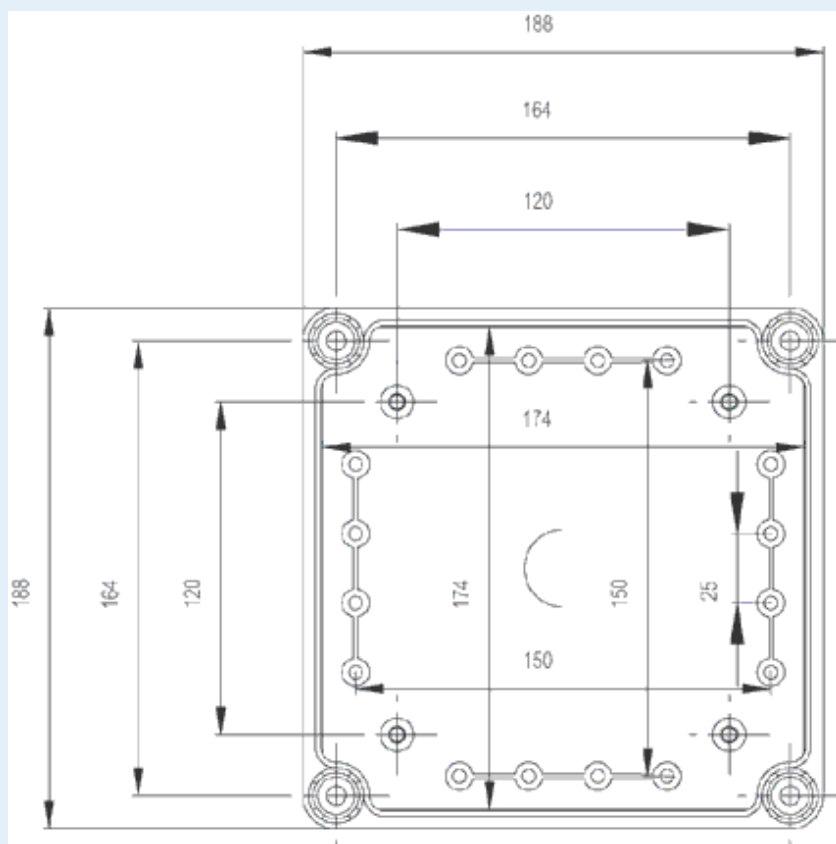

**Dimensions :**

|        | Height | Width | Depth |
|--------|--------|-------|-------|
| mm :   | 190    | 190   | 180   |
| inch : | 7.48   | 7.48  | 7.09  |

**Accessories :**

|        |                                                         |
|--------|---------------------------------------------------------|
| EKHVT  | Mounting plate, for enclosures:<br>(158 x 158 x 1.5)    |
| EKV 12 | DIN-35 Mounting rail, for enclosures:<br>(160 x 35 x 7) |

**Materials :**

|                   |                      |
|-------------------|----------------------|
| Material :        | Polycarbonate        |
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

MPI EKH 1919

Multiperforated plastic mounting plate  
(167 x 167 x 4)**Ratings :**

|                                         |                   |
|-----------------------------------------|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 746C           |
| Flammability Rating :                   | UL 94 V0          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C              |

**Certificates :**

DSS\_FI\_41597\_A1