


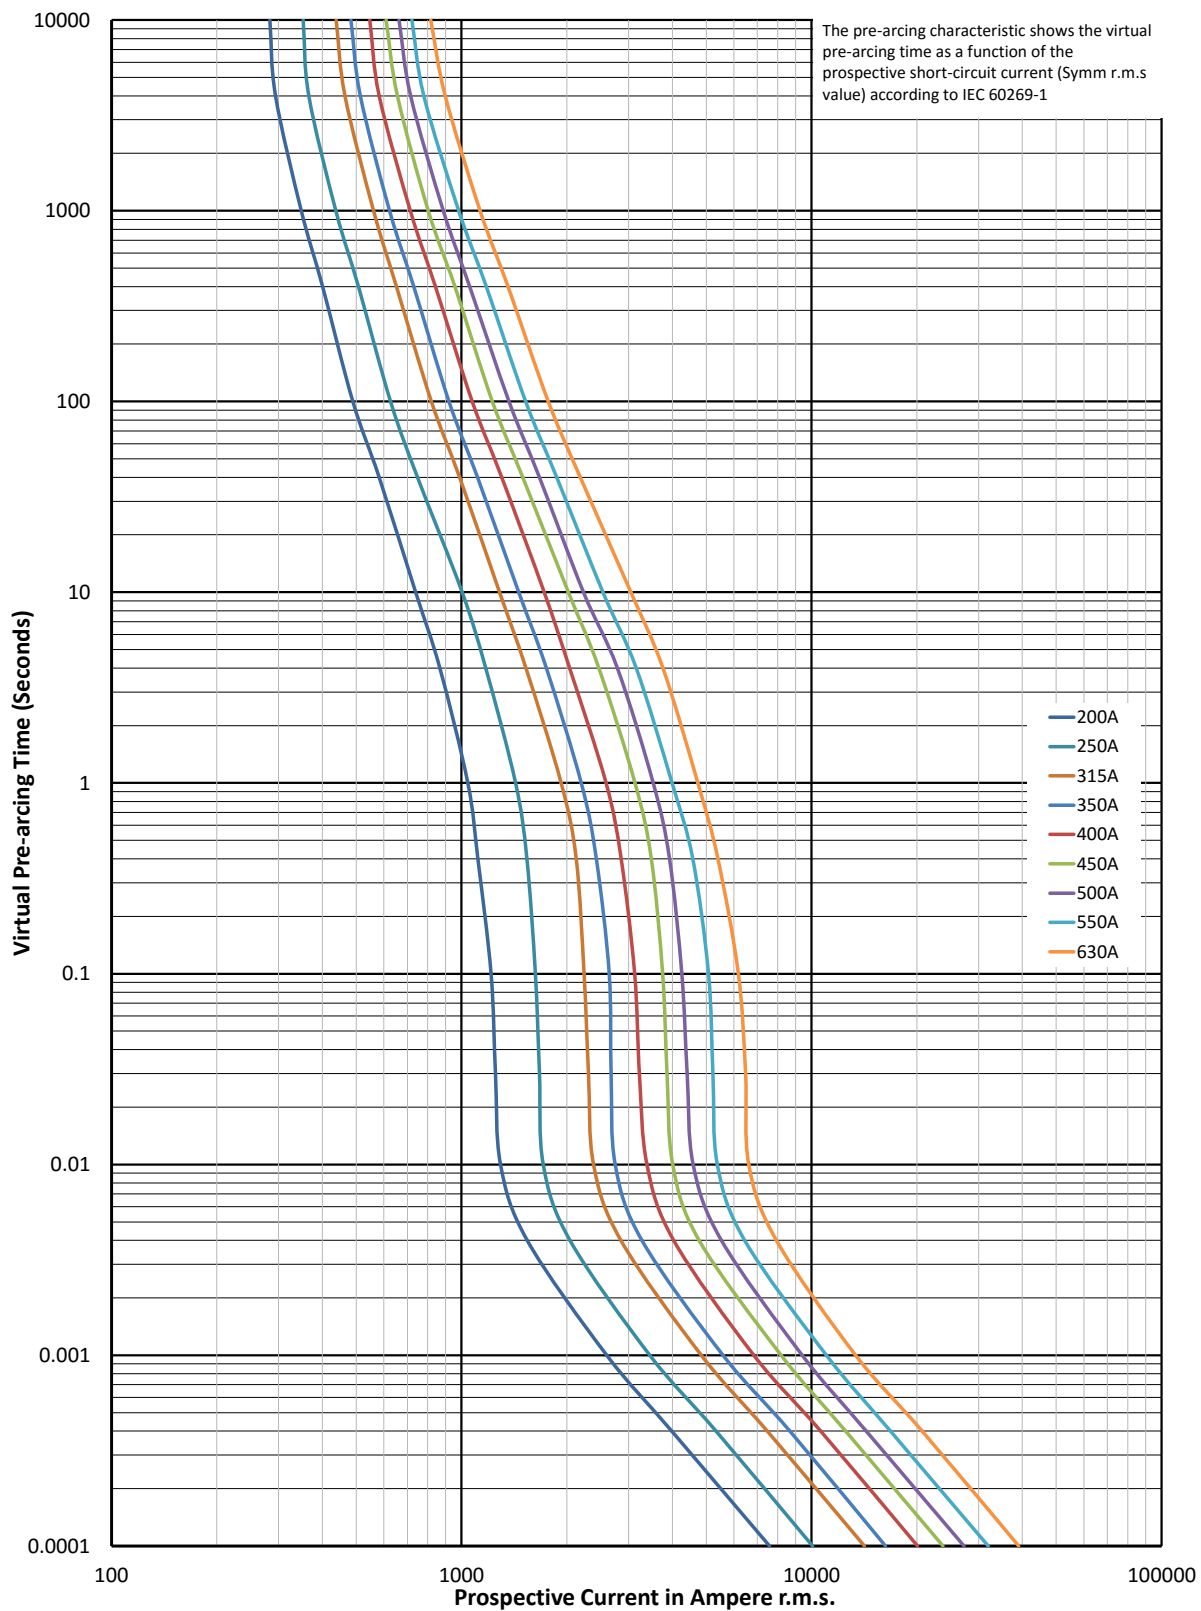

$K_b = 1$ $N = 1.6$

 <i>Powering Business Worldwide</i>	High Speed Fuse : Full Range 690V AC Type: TYPower ZILOX STANDARD RATINGS	DIN 2	Eaton Electrical Products Limited, Melton Road, Burton-on-the-Wolds, Leics, LE12 5TH Tel +44 1509 882 600 WWW.EATON.COM	Rev :	B
				Rev date:	16-Nov-18
				By:	KVS
				ECN No :	BUEB20169
				170K6418	

Rated current RMS-value A	Pre-arcing integral (from cold) A²s	Max operating I ² t at 690V~ A²s	Losses at rated current W
200	5650	29000	33
250	10000	52500	40
315	19500	105000	46
350	26000	135000	50
400	39500	205000	53
450	55500	290000	59
500	73000	375000	66
550	100000	515000	70
630	150000	770000	79





E_g [V] RMS value of working voltage in V

K Correction factor for max operating I^2t

K_p Correction factor for Watt losses

I_b RMS value of load current in % of
rated current

U_L Max Arc Voltage in $\hat{V}$

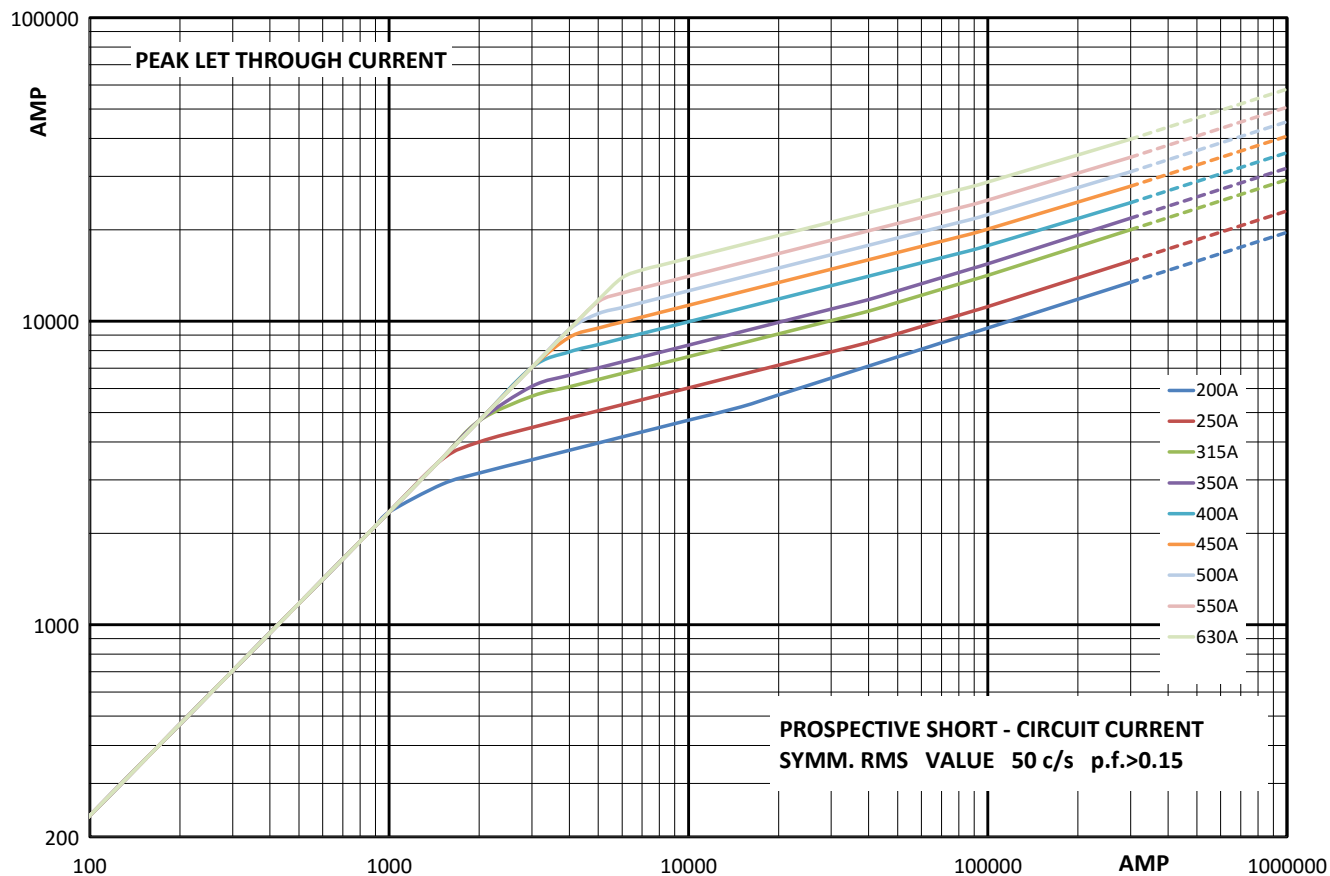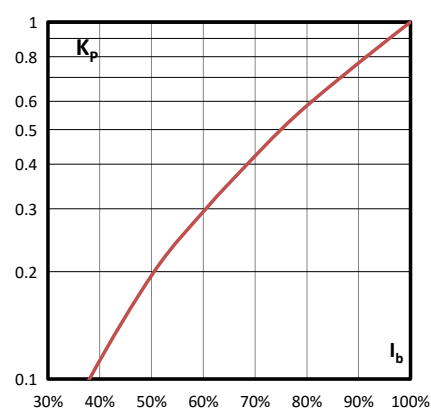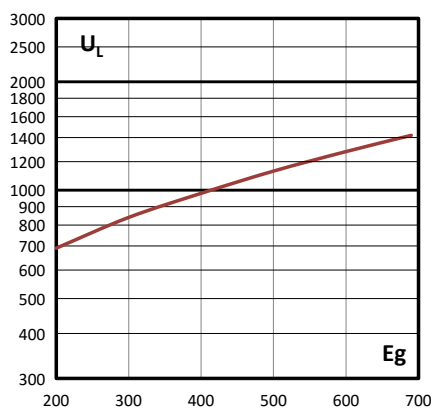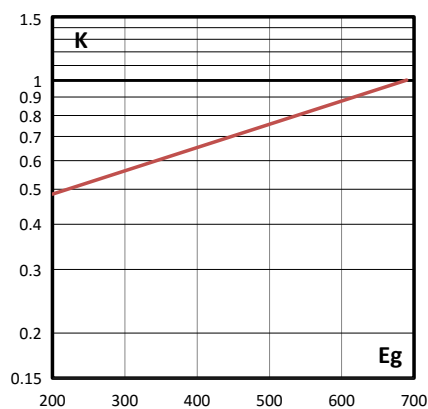

High Speed Fuse : Full Range 690V AC

Type: TYPower ZILOX
STANDARD RATINGS

DIN 2

Eaton Electrical Products Limited,
Melton Road, Burton-on-the-Wolds,
Leics, LE12 5TH
Tel +44 1509 882 600
WWW.EATON.COM

Rev :	B
Rev date:	16-Nov-18
By:	KVS
ECN No :	BUJEB20169

170K6419