


95992010

Remote interface D10 ATyS p M

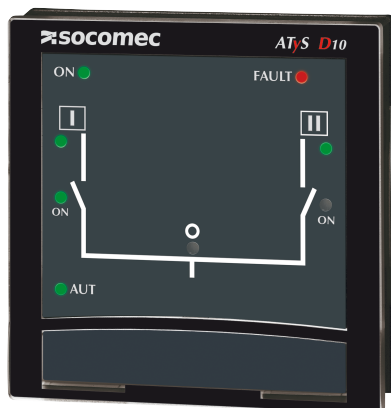

Strong points

- Safe voltage
- Easy to install

General characteristics

- Degree of protection: IP21
- Operating temperature range -10 to +55°C
- Maximum cable length: 3 m

Compliance with standards

- CE conformity

Access to resources (ex: manuals)

To display source availability and position indication on the front of a panel when the ATyS automatic transfer switch is enclosed.

The remote interface is powered directly from the ATyS M via the RJ45 connection cable.

- D10

To display source availability and position indication on the front panel of an enclosure.

- D20

In addition to the functions of the D10, the D20 displays measurements and enables control and configuration from the front of the display panel. Door mounting 2 holes Ø 22.5.

Connection to the ATyS M via socket and unshielded RJ45 cable. Cable not provided.

Technical Characteristics

| | |
|-------------|---------------------------|
| Weight [kg] | 0.18 |
| Type | Remote interface ATyS D10 |

Classification

| | |
|------------|----------|
| UNSPSC | 39122331 |
| ETIM Class | EC004862 |
| IGCC | 5367 |

Commerce

| | |
|-----------------------|------------|
| Effective date | 2013-02-20 |
| Offer Life Cycle Code | 40 |
| Country of origin | FR |

ETIM - Mechanical characteristics

| | |
|-------------------------------|---------|
| Colour display | No |
| Rail mounting possible | No |
| Wall mounting/direct mounting | Yes |
| Front built-in possible | No |
| Rack-assembly possible | No |
| Degree of protection (IP) | IP21 |
| Width [mm] | 96.94 |
| Height [mm] | 96.96 |
| Depth [mm] | 3.09 |
| Operating temperature [°C] | -10..55 |

ETIM - Technical features

| | |
|---------------------------------|-------|
| Type of display | Other |
| With on-screen keyboard | Yes |
| With touch screen | No |
| Mouse-cursor control integrated | No |
| With HW-interface PS2 | No |

Logistics

| | |
|---------------------------------|---------------|
| GTIN/EAN | 3596032735906 |
| Customs number | 8538909999 |
| Price unit | PC |
| Weight of the packing unit [kg] | 0.18 |
| Length of the packing unit [m] | 0.17 |
| Width of the packing unit [m] | 0.12 |
| Depth of the packing unit [m] | 0.06 |

Norms

Conformity to standards

IEC