


**15990532**

## 2nd auxiliary contact pre-break NO/NC ATyS 800-1600A customer fit

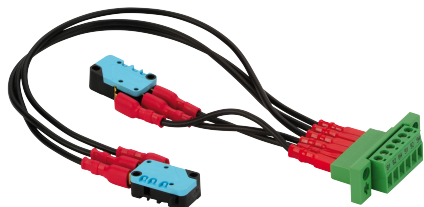

### General characteristics

- Possibility to install up to 2 auxiliary contacts for each position.
- Suitable for use as a 1st or 2nd auxiliary contact.
- Low level AC: contact us.
- As standard, 1 NO auxiliary contact is provided for all three positions.

[Link to the reference](#)

Pre-break and signalling of positions I and II: each reference provides 1 NO/NC auxiliary contact for positions I and II.

### Classification

UNSPSC	39122205
ETIM Class	EC000041
IGCC	5177

### Commerce

Effective date	2005-09-26
Offer Life Cycle Code	40
Country of origin	FR

### ETIM - Electrical characteristics

Number of contacts as change-over contact	1
Rated operation current Ie at AC-15, 230 V [A]	10

### ETIM - Mechanical characteristics

Type of electric connection	Screw connection
Mounting method	Front fastening

### ETIM - Technical features

Model	Integrable
-------	------------

### Logistics

GTIN/EAN	3596031801367
Customs number	8536500700
Price unit	PC
Weight of the packing unit [kg]	0.14
Length of the packing unit [m]	0.16
Width of the packing unit [m]	0.12
Depth of the packing unit [m]	0.13

### Technical Characteristics

Weight [kg]	0.14
Number change-over contacts	1
Number NC contacts	1
Number NO contacts	1
Type	2nd Auxiliary contact 800A-1600A customer fit