


LED ENCLOSURE LAMP

LED 022

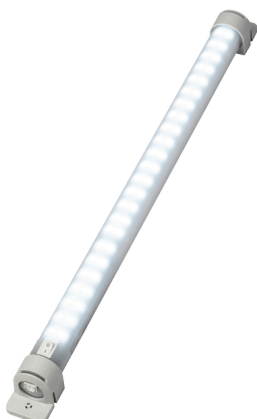

The optimum lamp for enclosures: the compact and powerful Varioline LED enclosure lamp. With up to 1700 Lm luminous flux for good visibility and work safety in large enclosures. The glare-free, 360° rotatable light body is equipped with mid-power LEDs. Long, maintenance-free service life of 60,000 hours.

- Switching options: PIR motion detector, on/off switch, without switch (prepared for external switch)
- Magnet or screw fixing
- Integrated power unit, daisy chain
- Available in two lengths: 400 and 600 mm
- Emitted luminous colour 6,500 K (daylight); angle of radiation 120°



OVERVIEW TECHNICAL DATA

Device type	LED enclosure lamps
Illuminant	LED
Protection class	II
Protection type	IP20
Casing	Plastic, translucent
AC/DC	AC
Operating voltage	100 V - 240 V
Operating voltage tolerance	90 V - 265 V
Frequency	50;60 Hz
Power consumption	16 W
Luminous colour	6500 K
Luminous flux	1730 Lm
Service life	>60000 h
Operating temperature	-40 °C - 40 °C
Operating humidity	≤90 % RH
Storage humidity	≤90 % RH
Storage temperature	-40 °C - 85 °C
Connection type	Connector plug
Connection	2-pole connector with snap lock
Mounting	Screw
Height	44 mm
Width	44 mm
Depth	600 mm

Weight	300 g
Item number accessories 1	244359
Item number accessories 2	244357
Item number accessories 3	264057
Item number accessories 4	264058
Accessory 1	Extension cable 2 x AWG 16 with female and male connectors - through-wiring, 1 m
Accessory 2	Connection cable 2 x AWG 16 with female connector, 2 m
Accessory 3	Separate female connector for cable connection
Accessory 4	Separate male connector for cable connection

PRODUCT VARIANTS

Article number	Switch
02220.0-00	without
02200.0-00	On/off switch

Connection cable with female connector and open end

Article number	Device name	Usage	Color	AC/DC	Design	Depth
244356	Connection cable with female connector and open end	for entrance side	Female connector: white Cable: white	AC	Connection cable 2 x 1.5 mm ² with female connector	2000 mm
244357	Connection cable with female connector and open end	for entrance side	Female connector: white Cable: white	AC	Connection cable 2 x AWG 15 with female connector	2000 mm



Female/male connectors

Article number	Device name	Usage	Color	AC/DC	Design	Cable cross section
264057	Female/male connectors	for entrance side	white	AC	Female connector	0.5-2.5 mm ² (AWG 14-20)
264058	Female/male connectors	for output side	white	AC	Male connector	0.5-2.5 mm ² (AWG 14-20)

Extension cable with female and male connectors for daisy chain wiring

Article number	Device name	Usage	Color	AC/DC	Design	Depth
244358	Extension cable with female and male connectors for daisy chain wiring	Daisy chain	Female/male connectors: white cable: white	DC	Extension cable 2 x 1.5 mm ² with female and male connectors	1000 mm
244359	Extension cable with female and male connectors for daisy chain wiring	Daisy chain	Female/male connectors: white cable: white	DC	Extension cable 2 x AWG 16 with female and male connectors	1000 mm

TECHNICAL DRAWINGS

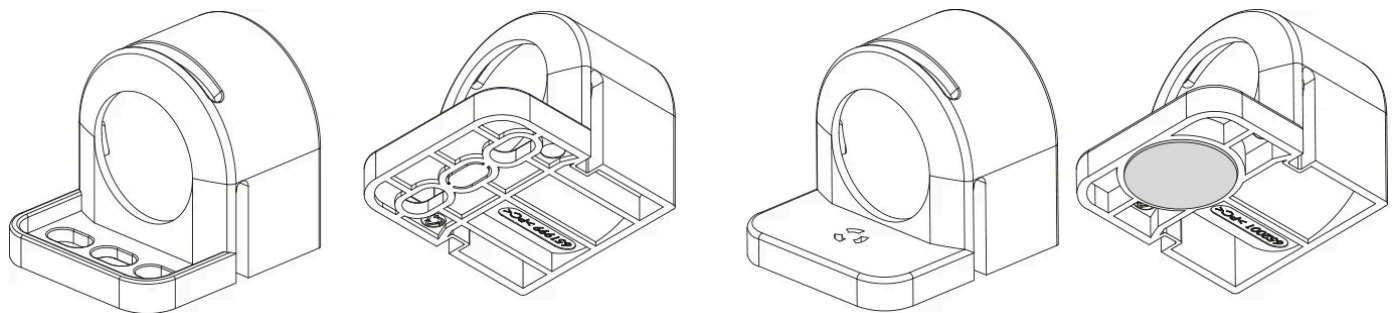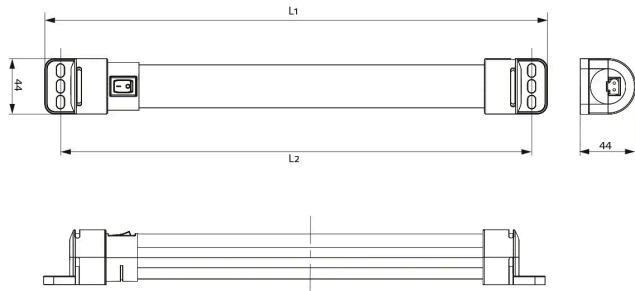

TECHNICAL DATASHEET

